




1

2

3

4

5

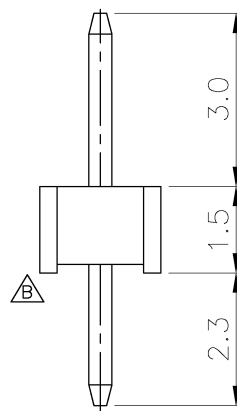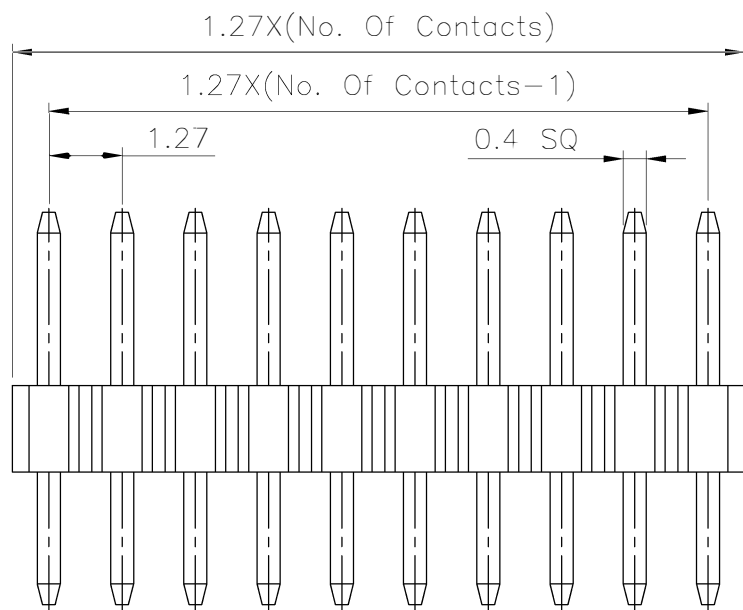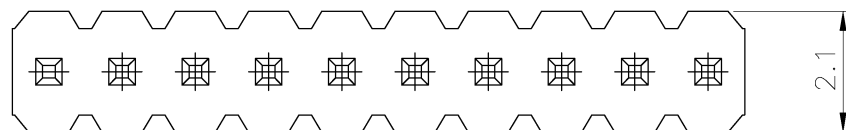

Specifications:
 Current rating:1.0 Amps
 Voltage rating:50V AC/DC
 Contact resistance:20mohm max.
 Insulation resistance:1,000Mohm min.
 Withstanding Voltage:500V For One Minute
 Operating Temperature:-25°C ~ +105°C


Material

Insulator:High Temp.Plastic(Nylon 9T UL94V-0)
 Standard Color:Black
 Contact:Copper Alloy
 Plated:Gold Plated

How To Order


2199SA-XXG-301523

Length
 Gold Plated
 No Of Contacts
 Single Rows

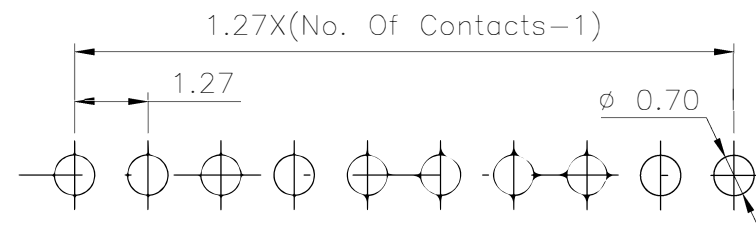

P.C.B layout

RoHS Compliant

				DRAWN: Cel king	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	 Neltron Industrial Co., Ltd.	
E				CHECKED: JEREMY LIU	UNIT: MM	DESCRIPTION: 1.27mm Pin Header Straight Single Row	SIZE A4
D					SCALE:20:1		
C				APPROVAL: MIKE WU	SHEET: 1 / 1	PART NO: 2199SA-XXG-301523	
B	27-Aug-2013	ECN-TW1308003	Cherry		PROJECTION: 		
A	13-Jul-2006		Cel king				
REV	DATE	FILE	BY				