

Specifications:
Current rating:1.0A AC/DC
Voltage rating:50V AC/DC
Contact resistance:20m ohm min
Insulation Resistance:1,000M ohm max
Withstanding voltage:500V AC/minute
Temperature range:-25°C to +105°C

Material and Finish
Insulator:High Temp.Plastic(Nylon 9T UL94V-0)
Terminal:Copper Alloy
Plating:Gold Plated

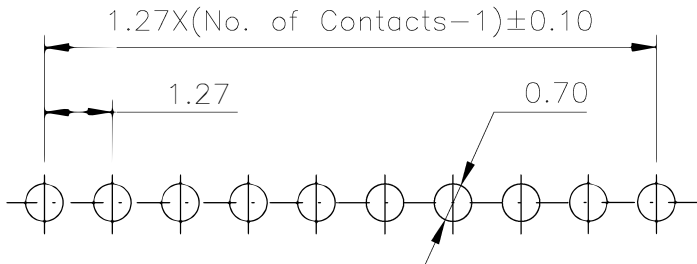
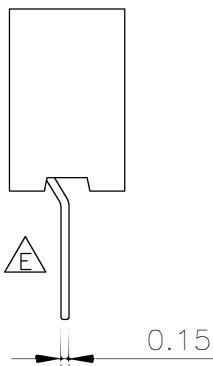
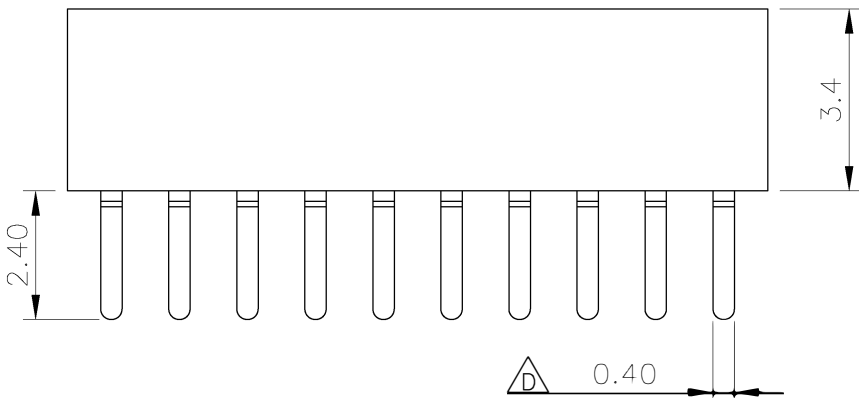
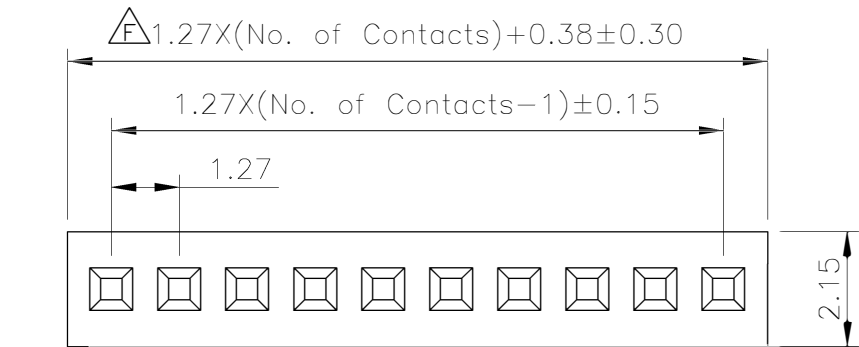
How To Order
2200SA-XXG-34

Plastic Height 3.4mm

Gold Plated








No. of Contacts

Single Row & Straight Type



PCB Layout

G	29-Dec-2022	Add Packing List	Lisy	DRAWN:	GENERAL TOLERANCE:	Neltron Connectors Neltron Industrial Co., Ltd.	
F	27-Jun-2022		Selin	Cel King	.X=±0.20 .XX=±0.15		
E	24-SEP-2020		Jamie	CHECKED:	UNIT: MM	DESCRIPTION: 1.27mm PCB Socket Single Row Straight Type	
D	09-JAN-2014	ECN-TW1401002	Cherry	Jeremy Liu	SCALE: 1:1		
C	24-JUN-2013	ECN-TW1306004	Cherry	APPROVAL:	SHEET: 1 / 2	PART NO: 2200SA-XXG-34	
A	05-Oct-2005		Cel King	Mike Wu	PROJECTION:		
REV	DATE	FILE	BY				SIZE A4

1		2		3		4		5		A																											
<table><tr><td>Pin No</td><td>Pcs/Bag</td><td>Pcs/Carton</td></tr><tr><td>02</td><td>1500</td><td>37,500</td></tr><tr><td>03</td><td>1500</td><td>37,500</td></tr><tr><td>04</td><td>1000</td><td>25,000</td></tr><tr><td>05</td><td>1000</td><td>25,000</td></tr><tr><td>06</td><td>1000</td><td>25,000</td></tr><tr><td>07</td><td>1000</td><td>25,000</td></tr><tr><td>08</td><td>500</td><td>12,500</td></tr><tr><td>10</td><td>500</td><td>12,500</td></tr></table>		Pin No	Pcs/Bag	Pcs/Carton	02	1500	37,500	03	1500	37,500	04	1000	25,000	05	1000	25,000	06	1000	25,000	07	1000	25,000	08	500	12,500	10	500	12,500	Note: 2~10Pin Bag Packing Quantity: XX Pcs/Bag XX Pcs/Carton				Note: 13~25Pin Tray Packing Quantity XX Pcs/Tray 8 Trays/Inner Carton 2 Inner Carton/Carton				B
Pin No	Pcs/Bag	Pcs/Carton																																			
02	1500	37,500																																			
03	1500	37,500																																			
04	1000	25,000																																			
05	1000	25,000																																			
06	1000	25,000																																			
07	1000	25,000																																			
08	500	12,500																																			
10	500	12,500																																			
										C																											
PE Bag For 2~10P		1Bag/Box				XX Pcs/Tray				D																											
																																					
		Carton				8 Trays/Inner Carton		Carton																													
G	29-Dec-2022	Add Packing List	Lisy	DRAWN:	GENERAL TOLERANCE:		 Neltron Industrial Co., Ltd.		SIZE A4																												
F	27-Jun-2022		Selin	Cel King	.X=±0.20 .XX=±0.15																																
E	24-SEP-2020		Jamie	CHECKED:	UNIT: MM		DESCRIPTION: 1.27mm PCB Socket Single Row Straight Type Packing List																														
D	09-JAN-2014	ECN-TW1401002	Cherry	Jeremy Liu	SCALE: 1:1																																
C	24-JUN-2013	ECN-TW1306004	Cherry	APPROVAL:	SHEET: 2 / 2		PART NO: 2200SA-XXG-34																														
A	05-Oct-2005		Cel King	Mike Wu	PROJECTION: 																																
REV	DATE	FILE	BY																																		