




1

2

3

4

5

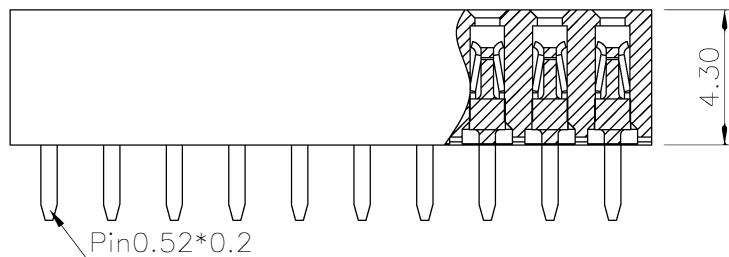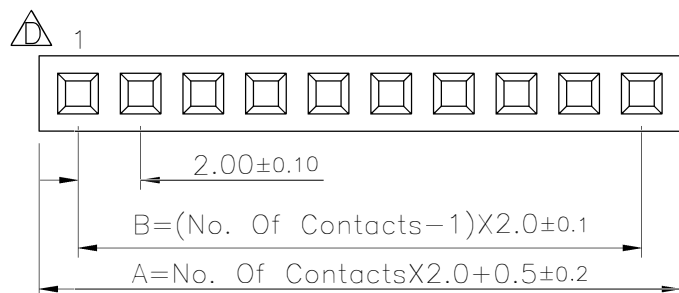


Dimension :

Pos	Dim A	Dim B	Pos	Dim A	Dim B	Pos	Dim A	Dim B	Pos	Dim A	Dim B
2	4.50	2.00	10	20.50	18.00	23	46.50	44.00	40	80.50	78.00
3	6.50	4.00	11	22.50	20.00	25	50.50	48.00			
4	8.50	6.00	12	24.50	22.00	28	56.50	54.00			
5	10.50	8.00	13	26.50	24.00	30	60.50	58.00			
6	12.50	10.00	14	28.50	26.00	32	64.50	62.00			
7	14.50	12.00	15	30.50	28.00	33	66.50	64.00			
8	16.50	14.00	18	36.50	34.00	35	70.50	68.00			
9	18.50	16.00	20	40.50	38.00	38	76.50	74.00			



Specifications:

Current rating:2.0A AC,DC
Voltage rating:250V AC, DC
Contact resistance:20m ohm Max
Insulation resistance:1000M ohm Min
Withstanding voltage:AC 500V AC/minute
Operating Temperature:-40°C ~ +105°C




Materials:

Insulator:Nylon 9T (UL94V-0) A
Insulator Color:Black
Terminal:Phosphor Bronze
Finish:Gold or Tin or Selective Gold Plated

How To Order

2209S-XXX

G:Gold Plated
T:Tin Plated
SG:Selective Gold Plated
No. Of Contacts
Straight Type

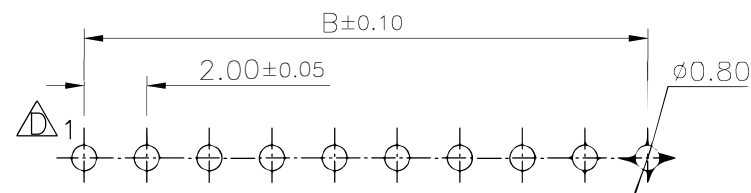

PCB Layout

RoHS Compliant

F	12-Feb-2020	modify material	Romina	DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E	21-Oct-2019	add 32P	Romina	Cel King	.X=±0.2 .XX=±0.15		
D	25-OCT-2012	ECN-TW1210002	Allen	CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C	25-Mar-2006	ECN-CN060318	ZHW	ZHW	SCALE:	2.0mm PCB Socket Single Row Straight Type	A4
B	Feb-17-2005	EN-CN041117	Jack	APPROVAL:	SHEET: 1 / 1	PART NO:	
A	09-Jan-2001		Fred Qiu	Mike Wu	PROJECTION:	2209S-XXX	
REV	DATE	FILE	BY				