

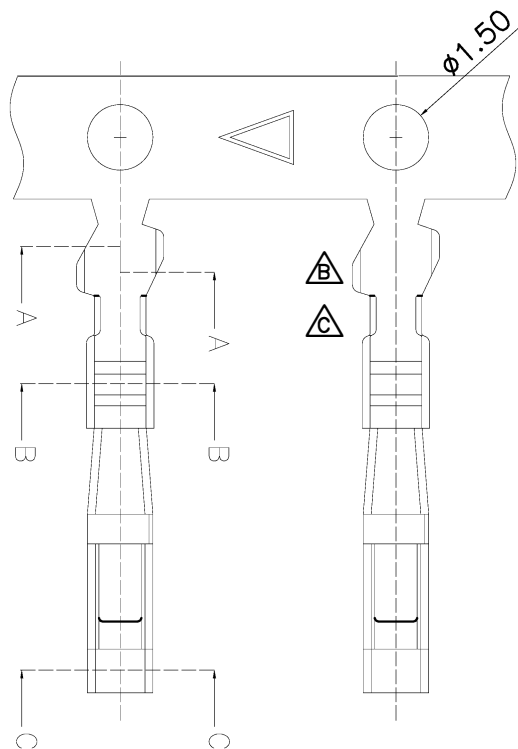




Section:A-A



Section:B-B

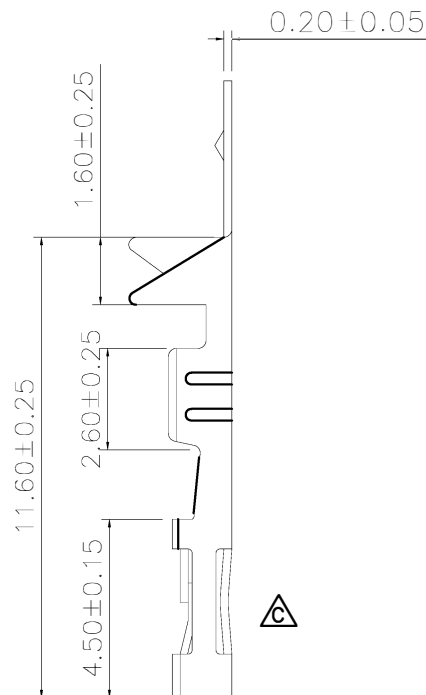

Section:C-C



Specifications:

Current Rating:3.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20m ohm. max.

Withstanding Voltage:800V AC/minute

Operating Temperature Range:-25°C~+85°C

Application Wires:AWG #22 to #28

Insulation O.D:1.7mm(Max)

Mates With 2226A/B Series Housing

Material and Finish

Contact:Brass

Finish:Gold Plated

Packing:10,000pcs/Reel

How To Order

2226TX

T: Tin Plated

G: Gold Plated

T: Terminal

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				Allen	.X=±0.2 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C	08-AUG-2019	修改外型&新增包裝圖	Lisy	Jerry Chen	SCALE: 1:1	2.54mm Wire To Board Crimp Terminal	A4
B	11-Dec-2018	圖面更新	Jack Huang	APPROVAL:	SHEET: 1/2	PART NO:	
A	08-APR-2013		Allen	Mike Wu	PROJECTION:	2226TX	
REV.	DATE	FILE	BY				


1

2


3

4


5

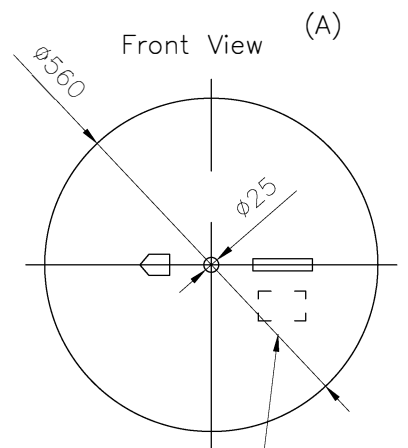


Back View

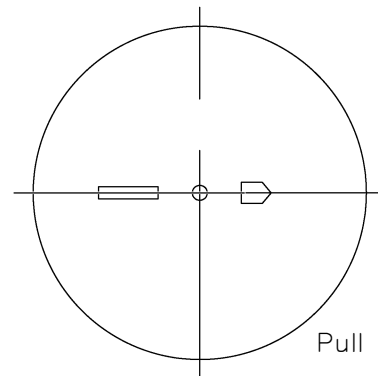


(B)

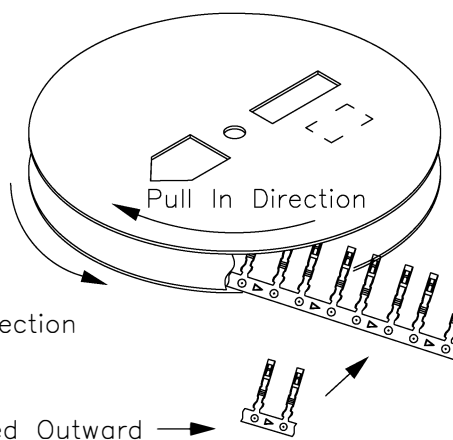

(C)



7Reel/Catron



Label

Part No	Q'ty/Reel	Reel/Carton	Q'ty/Carton
2226TX	10,000PCS	7Reel	70,000PCS

Package Quantity



Note :

A.Reel packing Size: $\phi 560 \times 25$, A=A, T=5mm; Paper shaft
Size: $\phi 150 \times 25$, T=17mm


B.Direction all the same as (Picture B), only available after plating,
separate each layer of terminal by putting paper between it.

C.attach label on each tray then place into Carton

D.Seal carton and attach carton label

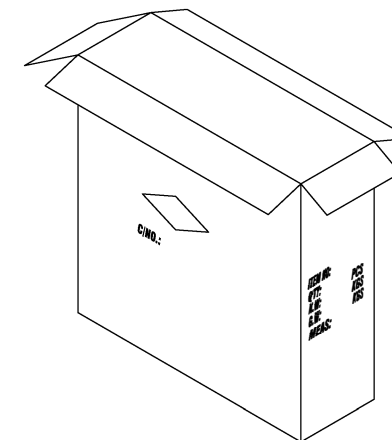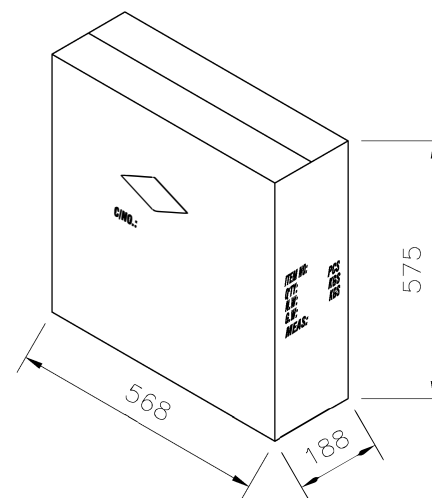

RoHS Compliant

				DRAWN: Allen	GENERAL TOLERANCE: .X=±0.25 .XX=±0.15	 Neltron Industrial Co., Ltd.	
				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.54mm Wire To Board Crimp Terminal Packing	
C	08-AUG-2019	修改外型&新增包裝圖	Lisy		SCALE:		
B	11-Dec-2018	圖面更新	Jack Huang	APPROVAL: Mike Wu	SHEET: 2 / 2	PART NO: 2226TX	
A	08-APR-2013		Allen		PROJECTION: 		
REV	DATE	FILE	BY				

SIZE

A4