

1

2

3

4


5

△ Specifications:
 Current rating:2.5Amps
 Voltage rating:250V AC,DC
 Dielectric Withstanding:800V AC;DC
 Operating Temperature:-25°C ~ +85°C
 Contact resistance:15mohm Max
 Insulation resistance:1,000Mohm min.

Materials and Finish
 Insulator:PBT(UL94V-0)
 Insulator Color:Black
 Mating Part:3750T

How To Order
 3750G-XX


No. Of Positions(2-18Ways)
 G:Lock Version Housing

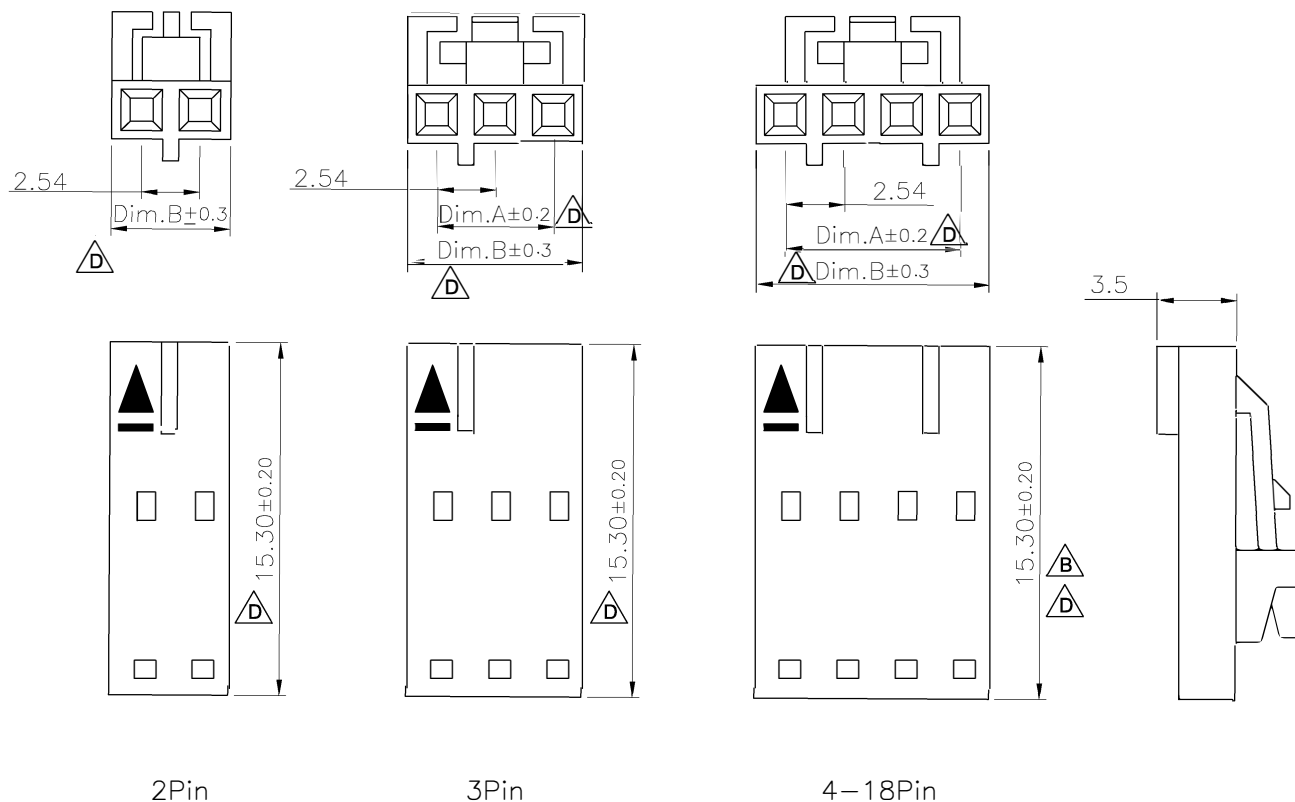

△ B △ C

Positions	Dim.A	Dim.B	Positions	Dim.A	Dim.B
2	2.54	5.35	14	33.02	35.83
3	5.08	7.89	15	35.54	38.37
4	7.62	10.43	16	38.10	40.91
5	10.16	12.97	17	40.64	43.45
6	12.70	15.51	18	43.18	45.99
7	15.24	18.05			
8	17.78	20.59			
9	20.32	23.13			
10	22.86	25.67			
11	25.40	28.21			
12	27.94	30.75			
13	30.48	33.29			

RoHS Compliant

F				DRAWN: Allen	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 Neltron Industrial Co., Ltd.		
E								
D	15-AUG-2022	Modify Lengths & Tolerances	Lisy	CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.54mm Pitch Lock Version Housing	SIZE A4	
C	12-APR-2021	update	MEI		SCALE: 1:1			
B	04-OCT-2013	ECN-TW1310003	Cherry	APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: 3750G-XX		
A	01-JUN-2009		Allen		PROJECTION: 			
REV	DATE	FILE	BY					