

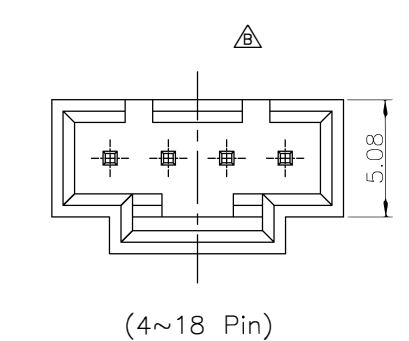
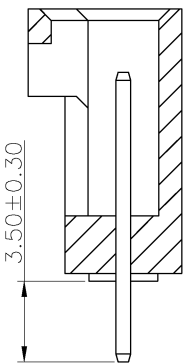



Specifications:
 Current Rating:2.5A AC/DC Δ
 Voltage Rating:250V AC/DC
 Contact Resistance:15m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:600V AC/Minute
 Operating Temperature Range:-25°C To +85°C Δ

Material And Finish:
 Insulator:PBT (UL94V-0)
 Insulator Color:Black
 Contact:Brass Δ
 Plating:Gold or Tin Plated

How To Order
 3750S-XXX
 └── Blank Gold Plated
 T: Tin Plated Δ
 No. of Contacts
 Straight Type

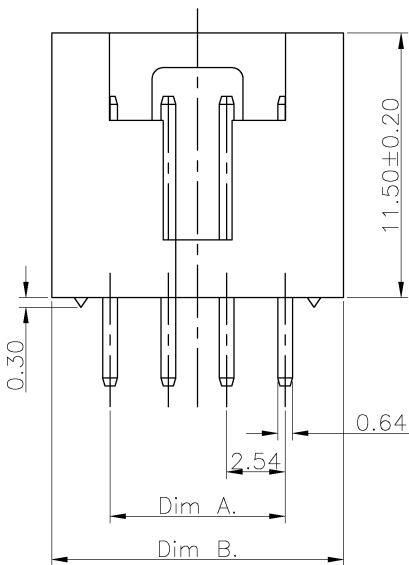

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	2.54	7.62	11	25.40	30.48
3	5.08	10.16	12	27.94	33.02
4	7.62	12.70	13	30.48	35.56
5	10.16	15.24	14	33.02	38.10
6	12.70	17.78	15	35.56	40.64
7	15.24	20.32	16	38.10	43.18
8	17.78	22.86	17	40.64	45.72
9	20.32	25.40	18	43.18	48.26
10	22.86	27.94			



P.C.B Layout

RoHS Compliant

F				DRAWN: Allen	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	 Neltron Industrial Co., Ltd.		D
E								
D	17–Nov–2020	New Plating spec.	Jamie	CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: 2.54mm Pocket Header Straight Single Row	SIZE A4	
C	18–Sep–2020	modify spec.	Romina		SCALE:1:1			
B	15–Apr–2020	del 2.54	Jerry Chen	APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: 3750S–XXX⚠		
A	05–Aug–2009		Allen		PROJECTION: 			
REV	DATE	FILE	BY					