


JIS C 2805

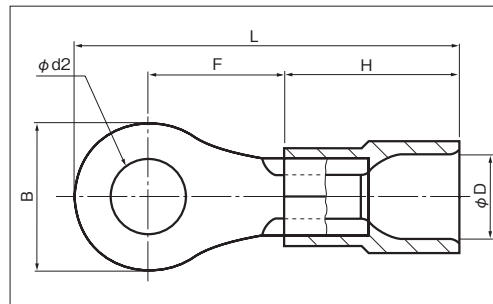

RoHS 10

P2をご確認下さい

| 品番                           | 各部の寸法 mm |      |      |      |       | 電線抱合範囲        |                   | 適用工具              |                  | 標準色            | 包装個数 |                   |
|------------------------------|----------|------|------|------|-------|---------------|-------------------|-------------------|------------------|----------------|------|-------------------|
|                              | φd2      | B    | L    | F    | H     | φD            | 燃線mm <sup>2</sup> | AWG               | 手動工具<br>本体   ヘッド |                |      |                   |
| TMEX 0.3-2                   | ○        | 2.2  | 5.2  | 17.5 | 4.9   | 10.0          | 2.8               | 0.2<br>}<br>0.5   | 24-20            | NH 5<br>NH 32  | 黄    | 1,000<br>(100×10) |
| TMEX 0.3-3                   | ○        | 3.2  |      | 17.5 | 4.9   |               |                   |                   |                  |                |      |                   |
| TMEX 0.3-3N                  | ○        | 3.2  | 19.8 | 7.2  |       |               |                   |                   |                  |                |      |                   |
| TMEX 0.3-3.5                 | ○        | 3.7  | 6.6  | 20.5 | 7.2   |               |                   |                   |                  |                |      |                   |
| TMEX 0.3-4                   | ○        | 4.3  |      |      |       |               |                   |                   |                  |                |      |                   |
| TMEX 0.3-5                   | ○        | 5.3  | 8.0  | 21.0 | 7.0   | NA 10<br>NA 3 | N10 10<br>N3 5    |                   |                  |                |      |                   |
| TMEX 1.25-2                  | ○        | 2.2  | 5.5  | 17.5 | 4.75  | 10.0          | 4.1               | 0.3<br>}<br>1.65  | 22-16            | NH 11<br>NH 32 | 赤    | 1,000<br>(100×10) |
| TMEX 1.25-2S                 | ○        | 2.2  | 5.7  | 17.4 | 4.55  |               |                   |                   |                  |                |      |                   |
| TMEX 1.25-3 (RBD 1.25-3)     | ●        | 3.2  | 5.5  | 17.5 | 4.75  |               |                   |                   |                  |                |      |                   |
| TMEX 1.25-3N                 | ○        | 3.2  | 5.6  | 20.4 | 7.6   |               |                   |                   |                  |                |      |                   |
| TMEX 1.25-3S                 | ○        | 3.2  | 5.7  | 17.4 | 4.55  |               |                   |                   |                  |                |      |                   |
| TMEX 1.25-3.5N               | ○        | 3.7  | 5.6  | 20.4 | 7.6   |               |                   |                   |                  |                |      |                   |
| TMEX 1.25-3.5S               | ○        | 3.7  | 5.7  | 17.4 | 4.55  |               |                   |                   |                  |                |      |                   |
| TMEX 1.25-3.5 (RBD 1.25-3.5) | ●        | 3.7  | 6.6  | 18.8 | 5.5   |               |                   |                   |                  |                |      |                   |
| TMEX 1.25-3.5M               | ○        | 3.7  | 6.8  | 19.4 | 6.0   |               |                   |                   |                  |                |      |                   |
| TMEX 1.25-3.5L               | ○        | 3.7  | 8.0  | 21.1 | 7.1   |               |                   |                   |                  |                |      |                   |
| TMEX 1.25-4M                 | ○        | 4.3  | 6.8  | 19.4 | 6.0   |               |                   |                   |                  |                |      |                   |
| TMEX 1.25-4 (RBD 1.25-4)     | ●        | 4.3  | 8.0  | 21.1 | 7.1   |               |                   |                   |                  |                |      |                   |
| TMEX 1.25-5 (RBD 1.25-5)     | ●        | 5.3  | 8.0  | 21.1 | 7.1   |               |                   |                   |                  |                |      |                   |
| TMEX 1.25-6                  | ○        | 6.4  | 12.0 | 25.7 | 9.7   |               |                   |                   |                  |                |      |                   |
| TMEX 1.25-8                  | ○        | 8.4  |      |      |       |               |                   |                   |                  |                |      |                   |
| TMEX 1.25-10                 | ○        | 10.5 | 16.5 | 30.5 | 12.25 | NA 10<br>NA 3 | N10 11<br>N3 11   | (50×10)           |                  |                |      |                   |
| TMEX 2-2                     | ○        | 2.2  | 6.5  | 18.2 | 4.95  | 10.0          | 4.6               | 1.04<br>}<br>2.63 | 16-14            | NH 12<br>NH 32 | 青    | 1,000<br>(100×10) |
| TMEX 2-3N                    | ○        | 3.2  | 5.6  | 20.4 | 7.6   |               |                   |                   |                  |                |      |                   |
| TMEX 2-3S                    | ○        | 3.2  | 5.7  | 17.8 | 4.95  |               |                   |                   |                  |                |      |                   |
| TMEX 2-3                     | ○        | 3.2  | 6.5  | 18.2 |       |               |                   |                   |                  |                |      |                   |
| TMEX 2-3.5N                  | ○        | 3.7  | 5.6  | 20.4 | 7.6   |               |                   |                   |                  |                |      |                   |
| TMEX 2-3.5NS                 | ○        | 3.7  | 6.5  | 18.2 | 4.95  |               |                   |                   |                  |                |      |                   |
| TMEX 2-3.5 (RBD 2-3.5)       | ●        | 3.7  | 6.6  | 19.9 | 6.6   |               |                   |                   |                  |                |      |                   |
| TMEX 2-3.5S                  | ○        | 3.7  | 6.6  | 20.9 | 7.6   |               |                   |                   |                  |                |      |                   |
| TMEX 2-3.5M                  | ○        | 3.7  | 8.0  | 21.5 | 7.5   |               |                   |                   |                  |                |      |                   |
| TMEX 2-4S                    | ○        | 4.3  | 6.6  | 19.9 | 6.6   |               |                   |                   |                  |                |      |                   |
| TMEX 2-4M                    | ○        | 4.3  | 8.0  | 21.5 | 7.5   |               |                   |                   |                  |                |      |                   |
| TMEX 2-4 (RBD 2-4)           | ●        | 4.3  | 8.5  | 22.0 | 7.75  |               |                   |                   |                  |                |      |                   |
| TMEX 2-5M                    | ○        | 5.3  | 8.0  | 21.5 | 7.5   |               |                   |                   |                  |                |      |                   |
| TMEX 2-5 (RBD 2-5)           | ●        | 5.3  | 9.5  | 22.5 | 7.75  |               |                   |                   |                  |                |      |                   |
| TMEX 2-6 (RBD 2-6)           | ●        | 6.4  | 12.0 | 27.0 | 11.0  |               |                   |                   |                  |                |      |                   |
| TMEX 2-8 (RBD 2-8)           | ●        | 8.4  |      |      |       |               |                   |                   |                  |                |      |                   |
| TMEX 2-10                    | ○        | 10.5 | 15.0 | 30.0 | 12.5  | NA 10<br>NA 3 | N10 12<br>N3 12   | 500<br>(50×10)    |                  |                |      |                   |
| TMEX 2-12                    | ○        | 13.0 | 19.0 | 34.0 | 14.5  |               |                   |                   |                  |                |      |                   |

注1) ●: JIS規格品. UL・C-UL登録品 ○: UL・C-UL登録品

2) UL・C-UL登録品 絶縁体の材質・色 電線被覆ムキ寸法 についてはP39をご覧ください。

3) TMEX (ポリカーボネイト) 端子は標準色以外に透明色がございます。