


■R形

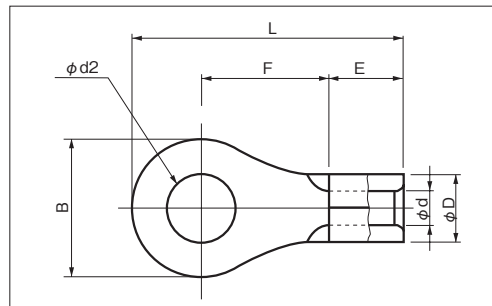

RoHS 10

P2をご確認ください

品番	各 部 の 寸 法 mm							電線抱合範囲			適 用 工 具		包装個数	
	φd2	B	L	F	E	φD	φd	単線mm	熱線mm ²	AWG	手 動 工 具			
											本 体	ヘ ッ ド		
R 0.3-2 ○	2.2	5.2	12.0	4.9	4.5	2.2	1.0	－	0.2～0.5 0.3～0.5 UL・CSA 指定	24-20 22-20 UL・CSA 指定	NH 69 NA 10 NA 3		N10 04 N3 70	1,000 (100×10)
R 0.3-3 ○	3.2		12.0	4.9										
R 0.3-3N ○	3.2		14.3	7.2										
R 0.3-3.5 ○	3.7	6.6	15.0	7.2										
R 0.3-4 ○	4.3													
R 0.3-5 ○	5.3		8.0	15.5										
R 0.75-3 △	3.2	5.6	12.0	4.7	4.5	2.5	1.4	－	0.3～0.75	22-18	NH 69 NA 10 NA 3		N10 05 N3 69	1,000 (100×10)
R 0.75-3.5 △	3.7													
R 0.75-4	4.3		6.6	13.3										
R 1.25-2 ○	2.2	5.5	12.0	4.7	4.5	3.4	1.7	0.57 1.44	0.25 1.65	22-16	NH 1 NH 61A NH 69 NA 10 NA 3		N10 01 N3 7	1,000 (100×10)
R 1.25-2S ○		5.7	11.9	4.5										
R 1.25-3 ●		3.2	5.5	12.0										
R 1.25-3N ○	5.6		14.9	7.6										
R 1.25-3S ○	5.7		11.9	4.5										
R 1.25-3.5N ○	3.7	5.6	14.9	7.6										
R 1.25-3.5S ○		5.7	11.9	4.5										
R 1.25-3.5 ●		6.6	13.3	5.5										
R 1.25-3.5M ○		6.8	13.9	6.0										
R 1.25-3.5L ○	4.3	8.0	15.6	7.1										
R 1.25-4S		6.6	13.3	5.5										
R 1.25-4M ○		6.8	13.9	6.0										
R 1.25-4 ●	5.3	8.0	15.6	7.1										
R 1.25-5 ●		8.0	15.6	7.1										
R 1.25-6 ○	6.4	12.0	20.2	9.7										
R 1.25-8 ○	8.4													
R 1.25-10 ○	10.5													

注1) ●: JIS規格品. UL・CSA登録品 ○: UL・CSA登録品 △: UL登録品

2) UL・CSA登録品 電線被覆ムキ寸法 についてはP14をご覧ください。