


銅線用

裸圧着端子 (R形) 丸形

JIS C 2805

■R形

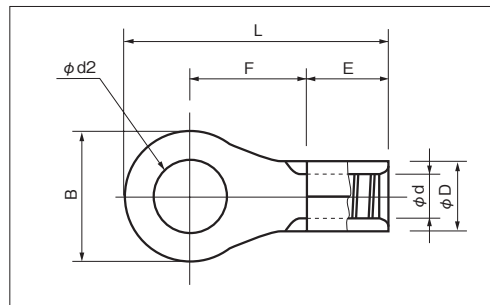

RoHS 10

P2をご確認下さい

品 番			各 部 の 寸 法 mm							電線抱合範囲			適 用 工 具		包装個数
			φd2	B	L	F	E	φD	φd	単線mm	撚線mm ²	AWG	手 動 工 具		
													本 体	ヘ ッ ド	
R 5.5-3M ※ ○	3.2	6.5	16.9	7.2	6.5	5.6	3.4	1.82 2.89	2.63 6.64	12-10	NH 1 NH 9			1,000 (100×10)	
R 5.5-3N ※ ○		7.0	17.2												
R 5.5-3S ※ ○		9.0	18.2												
R 5.5-3.5N ※ ○	3.7	7.0	17.2												
R 5.5-3.5S ※ ○		9.0	18.2												
R 5.5-3.5 ○	4.3	9.5	19.5	8.2											
R 5.5-4N ※ ○		7.0	17.2	7.2											
R 5.5-4S ※ ○		9.0	18.2												
R 5.5-4 ●	5.3	9.5	19.5	8.2											
R 5.5-5N ※ ○		8.0	17.7	7.2											
R 5.5-5S ※ ○		9.0	18.2												
R 5.5-5 ●	6.4	9.5	19.5	8.2											
R 5.5-6S ※		9.0	23.0	12.0											
R 5.5-6 ●		12.0		10.5											
R 5.5-8S ※	8.4	13.2	22.1	9.0											
R 5.5-8 ●		15.0	28.0	14.0											
R 5.5-10 ●	10.5	19.2	32.5	16.4											
R 5.5-12 ○	13.0														
R 5.5-14 ○	15.0														
R 5.5-16	17.0														
R 5.5-18	19.0	29.5	48.0	26.7							NA 10 NA 3	N10 03 N3 7	250 (25×10)		
R 5.5-20	21.0														
R 8-4S ○	4.3	8.0	21.5	9.1	8.4	7.1	4.5	2.89 3.65	6.64 10.52	8	NH 1 NH 9 NOP 60 NOM 60	NA 20 N20 08		1,000 (100×10)	
R 8-4 ○		12.0	23.5	9.1											
R 8-5N ※	5.3	9.0	22.0	9.1											
R 8-5S ○		10.0	22.5	9.1											
R 8-5 ●		12.0	23.5												
R 8-6S ○	6.4	10.0	22.5												
R 8-6 ●		12.0	23.5												
R 8-8S	8.4	15.0	29.5	13.6											
R 8-8 ●		15.0	29.5	13.6											
R 8-10 ●	10.5	20.0	33.5	15.1											
R 8-12 ○	13.0														
R 8-14 ○	15.0														
R 8-16	17.0														
R 8-18	19.0	31.0	50.0	26.1											
R 8-20	21.0														

※定格電流、引張り強さ等、他の端子と一部仕様が異なります。

注1) ●: JIS規格品 UL・CSA登録品 ○: UL・CSA登録品

2) [UL・CSA登録品] [電線被覆ムキ寸法] についてはP14をご覧ください。