
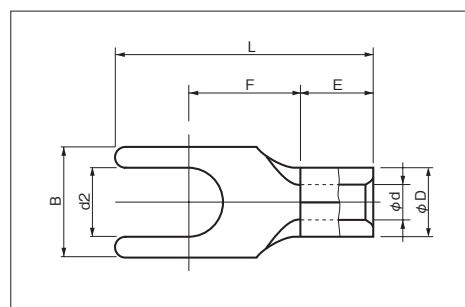


■Y形

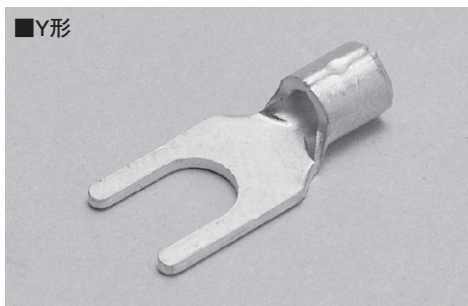

RoHS10

P2をご確認下さい

品番	各 部 の 寸 法 mm							電線抱合範囲			適 用 工 具		包装個数															
	d2	B	L	F	E	φD	φd	単線mm	撚線mm ²	AWG	手 動 工 具																	
											本 体	ヘ ッ ド																
0.3Y-2 ○	2.2	5.2	12.0	4.9	4.5	2.2	1.0	—	0.2~0.5 0.3~0.5 UL・CSA 指定	24-20 22-20 UL・CSA 指定	NH 69 NA 10 NA 3 N10 04 N3 70		1,000 (100×10)															
0.3Y-3 ○	3.2																											
0.3Y-3.5N ○	3.7	5.8	15.0	5.8																								
0.3Y-4N ○	4.3	6.4		6.6																								
0.3Y-5 ○	5.3	8.0	15.5	7.0																								
0.75Y-3 △	3.2	5.6	14.5	5.8	4.5	2.5	1.4	—	0.3 ∩ 0.75	22-18	NH 69 NA 10 NA 3 N10 05 N3 69		1,000 (100×10)															
0.75Y-3.5 △	3.7	5.8																										
0.75Y-4 △	4.3	6.4		15.0										6.0														
1.25Y-2.5 ○	2.7	4.7	11.7	5.1	4.5	3.4	1.7	0.57 ∩ 1.44	0.25 ∩ 1.65	22-16	NH 1 NH 61A NH 69 NA 10 NA 3 N10 01 N3 7		1,000 (100×10)															
1.25Y-3K ○	3.2	5.6	15.0	5.8																								
1.25Y-3S ○		5.7	11.9	4.8																								
1.25Y-3 ○		5.8	15.0	5.8																								
1.25Y-3N ○	3.7	5.8	16.0	6.6																								
1.25Y-3.5K ○			15.0	5.8																								
1.25Y-3.5 ○			16.0	6.8																								
1.25Y-3L ○	4.3	6.2	16.0	6.8																								
1.25Y-4N ○		6.4	16.4	6.6																								
1.25Y-4S ○		7.0		7.6																								
1.25Y-4M ○	8.1	7.5																										
1.25Y-4L ○	5.3	9.6	17.5	8.3																								
1.25Y-5 ○		6.4	11.0	19.0										8.6														
2Y-3S ※		3.2	5.6	15.8							6.6	4.5		4.2	2.3	1.14 ∩ 1.82	1.04 ∩ 2.63	16-14	NH 1 NH 9 NH 61A NH 69 NA 10 NA 3 N10 02 N3 7		1,000 (100×10)							
2Y-3 ○	5.9																											
2Y-3.5K ※	3.7	5.6																										
2Y-3.5S ○		5.8																										
2Y-3.5 ○		6.4																										
2Y-3.5L ○	4.3	6.4	16.0	7.6																								
2Y-4N ○				6.6																								
2Y-4S ○				7.0							7.0																	
2Y-4 ○	5.3	8.0	17.1	8.7																								
2Y-4M ○		10.0	16.0	7.1																								
2Y-5 ○		8.0	17.1	8.7																								
2Y-5M ○	6.4	12.0	18.0	8.5																								
2Y-5L ○			20.0	8.6																								
2Y-6 ○	8.4	14.0	22.0	11.5																								
2Y-8 ○																												

※定格電流、引張り強さ等、他の端子と一部仕様が異なります。

注1) ○：UL・CSA登録品 △：UL登録品

2) UL・CSA登録品 [電線被覆ムキ寸法] についてはP14をご覧ください。

3) 先開形1.25Y-3Sの接触部形状は右図の丸形となります。

