


JIS C 2805

■TMEX R形

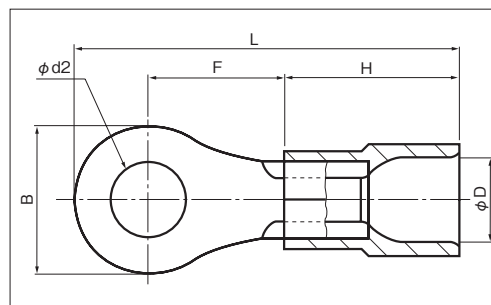

RoHS 10

P2をご確認下さい

品番	各 部 の 寸 法 mm					電線抱合範囲		適 用 工 具		標準色	包装個数					
	φd2	B	L	F	H	φD	燃線mm ²	AWG	手 動 工 具							
									本 体			ヘ ッ ド				
TMEX 0.3-2 ○	2.2	5.2	17.5	4.9	10.0	2.8	0.2 ∩ 0.5	24-20	NH 5 NH 32		黄	1,000 (100×10)				
TMEX 0.3-3 ○	3.2		17.5	4.9												
TMEX 0.3-3N ○	3.2		19.8	7.2												
TMEX 0.3-3.5 ○	3.7	6.6	20.5	7.2	10.0	2.8	0.2 ∩ 0.5	24-20			黄	1,000 (100×10)				
TMEX 0.3-4 ○	4.3															
TMEX 0.3-5 ○	5.3		8.0	21.0					7.0							
TMEX 1.25-2 ○	2.2	5.5	17.5	4.7	10.0	4.1	0.3 ∩ 1.65	22-16	NH 11 NH 32		赤	1,000 (100×10)				
TMEX 1.25-2S ○		5.7	17.4	4.5												
TMEX 1.25-3 (RBD 1.25-3) ●	3.2	5.5	17.5	4.7												
TMEX 1.25-3N ○		5.6	20.4	7.6												
TMEX 1.25-3S ○		5.7	17.4	4.5												
TMEX 1.25-3.5N ○	3.7	5.6	20.4	7.6												
TMEX 1.25-3.5S ○		5.7	17.4	4.5												
TMEX 1.25-3.5 (RBD 1.25-3.5) ●		6.6	18.8	5.5												
TMEX 1.25-3.5M ○	4.3	6.8	19.4	6.0												
TMEX 1.25-3.5L ○		8.0	21.1	7.1												
TMEX 1.25-4S		6.6	18.8	5.5												
TMEX 1.25-4M ○	5.3	6.8	19.4	6.0												
TMEX 1.25-4 (RBD 1.25-4) ●		8.0	21.1	7.1												
TMEX 1.25-5 (RBD 1.25-5) ●		8.0	21.1	7.1												
TMEX 1.25-6 ○	6.4	12.0	25.7	9.7									NA 10 NA 3	N10 11 N3 11	青	500 (50×10)
TMEX 1.25-8 ○	8.4															
TMEX 1.25-10 ○	10.5															
TMEX 2-2 ○	2.2	6.5	18.2	4.9	10.0	4.6	1.04 ∩ 2.63	16-14	NH 12 NH 32		青	1,000 (100×10)				
TMEX 2-3N ○	3.2	5.6	20.4	7.6												
TMEX 2-3S ○		5.7	17.8	4.9												
TMEX 2-3 ○		6.5	18.2	4.9												
TMEX 2-3.5N ○	3.7	5.6	20.4	7.6												
TMEX 2-3.5NS ○		6.5	18.2	4.9												
TMEX 2-3.5 (RBD 2-3.5) ●		6.6	19.9	6.6												
TMEX 2-3.5S ○	4.3	6.6	20.9	7.6												
TMEX 2-3.5M ○		8.0	21.5	7.5												
TMEX 2-4S ○		6.6	19.9	6.6												
TMEX 2-4M ○	5.3	8.0	21.5	7.5												
TMEX 2-4 (RBD 2-4) ●		8.5	22.0	7.7												
TMEX 2-5M ○		8.0	21.5	7.5												
TMEX 2-5 (RBD 2-5) ●	6.4	9.5	22.5	7.7												
TMEX 2-6 (RBD 2-6) ●		12.0	27.0	11.0												
TMEX 2-8 (RBD 2-8) ●		8.4	27.0	11.0												
TMEX 2-10 ○	10.5	15.0	30.0	12.5									NA 10 NA 3	N10 12 N3 12	青	500 (50×10)
TMEX 2-12 ○	13.0	19.0	34.0	14.5												

注1) ●: JIS規格品。UL・C-UL登録品 ○: UL・C-UL登録品

2) UL・C-UL登録品 絶縁体の材質・色 電線被覆ムキ寸法 についてはP41をご覧ください。

3) TMEX (ポリカーボネート) 端子は標準色以外に透明色がございます。