


■TMEX Y形

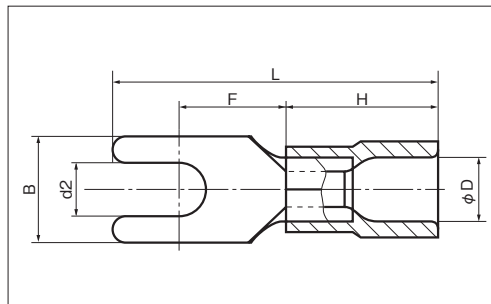

RoHS 10

P2をご確認下さい

品番	各 部 の 寸 法 mm						電線抱合範囲		適 用 工 具		標準色	包装個数						
	d2	B	L	F	H	φD	燃線mm ²	AWG	手 動 工 具									
									本 体	ヘ ッ ド								
TMEX 0.3Y-2 ○	2.2	5.2	17.5	4.9	10.0	2.8	0.2 ∩ 0.5	24-20	NH 5 NH 32		黄	1,000 (100×10)						
TMEX 0.3Y-3 ○	3.2																	
TMEX 0.3Y-3.5N ○	3.7	5.8	20.5	5.8														
TMEX 0.3Y-4N ○	4.3	6.4		6.6														
TMEX 0.3Y-5 ○	5.3	8.0	21.0	7.0					NA 10 NA 3	N10 10 N3 5								
TMEX 1.25Y-2.5 ○	2.7	4.7	17.2	5.1	10.0	4.1	0.3 ∩ 1.65	22-16	NH 11 NH 32		赤	1,000 (100×10)						
TMEX 1.25Y-3K ○	3.2	5.6	20.5	5.8														
TMEX 1.25Y-3S ○		5.7	17.4	4.8														
TMEX 1.25Y-3 ○		5.8	20.5	5.8														
TMEX 1.25Y-3N ○			21.5	6.6														
TMEX 1.25Y-3.5K ○	3.7	5.6	20.5	5.8														
TMEX 1.25Y-3.5 ○		5.8																
TMEX 1.25Y-3L ○		6.2	21.5	6.8														
TMEX 1.25Y-4N ○	4.3	6.4	21.9	6.6														
TMEX 1.25Y-4S ○		7.0		7.6														
TMEX 1.25Y-4M ○		8.1	7.5															
TMEX 1.25Y-4L ○		9.6	23.0	8.3														
TMEX 1.25Y-5 ○	5.3												NA 10 NA 3	N10 11 N3 11				
TMEX 1.25Y-6 ○	6.4	11.0	24.5	8.6														
TMEX 2Y-3S ※	3.2	5.6	21.3	6.6					10.0	4.6			1.04 ∩ 2.63	16-14	NH 12 NH 32		青	1,000 (100×10)
TMEX 2Y-3 ○		5.9																
TMEX 2Y-3.5K ※	3.7	5.6																
TMEX 2Y-3.5S ○		5.8																
TMEX 2Y-3.5L ○		6.4			7.6													
TMEX 2Y-4N ○	4.3			6.6														
TMEX 2Y-4S ○		7.0	21.5	7.0														
TMEX 2Y-4 ○		8.0	7.1															
TMEX 2Y-4M ○		10.0	22.6	8.7														
TMEX 2Y-5 ○	5.3	8.0	21.5	7.1														
TMEX 2Y-5M ○		10.0	22.6	8.7														
TMEX 2Y-5L ○		12.0	23.5	8.5														
TMEX 2Y-6 ○	25.5		8.6															
TMEX 2Y-8 ○	8.4	14.0	27.5	11.5							NA 10 NA 3	N10 12 N3 12				(50×10)		
TMEX 3.5Y-4 ○	4.3	8.0	26.0	7.2	14.0	6.3	2.63 ∩ 4.6	12			NH 13				黄	500 (50×10)		
TMEX 3.5Y-5 ○	5.3	9.5	28.0	8.3					NA 10 NA 3	N10 13 N3 13								
TMEX 3.5Y-6 ○	6.4	12.0	30.0	9.8														
TMEX 5.5Y-3.5N	4.3	7.0	24.5	7.2	14.0	6.8	2.63 ∩ 6.64	12-10	NH 13		黄	500 (50×10)						
TMEX 5.5Y-4S ○		8.4																
TMEX 5.5Y-4 ○		9.0	25.7															
TMEX 5.5Y-5 ○		5.2	9.0															
TMEX 5.5Y-6 ○	6.4	12.5	32.7	12.0									NA 10 NA 3	N10 13 N3 13				

※定格電流、引張り強さ等、他の端子と一部仕様が異なります。

注1) ○：UL・C-UL登録品

2) UL・C-UL登録品 絶縁体の材質・色 電線被覆ムキ寸法 についてはP41をご覧ください。

3) 先開形 1.25Y-3Sの接触部形状は右図の丸形となります。

4) TMEX (ポリカーボネート) 端子は標準色以外に透明色がございます。

