



⚠ To be discontinued

## Commercial status

To be discontinued on: 31 December 2022

To be end-of-service on: 31 December 2024

## Main

|                                       |   |
|---------------------------------------|---|
| Range of product                      | ConneXium   |
| Product or component type             | Ethernet TCP/IP managed switch  |
| Concept                               | Transparent Ready   |
| Communication port protocol           | Ethernet TCP/IP<br>SSH<br>HTTP<br>HTTPS<br>SNMP<br>RS232<br>LLDP<br>Telnet<br>SNTP<br>MRP (Media Redundancy Protocol) |
| Port Ethernet                         | 10/100BASE-TX - 8 port(s) copper cable  |
| Maximum number of switches in cascade | Unlimited   |
| Cybersecurity                         | Port hardening  |

## Complementary

|  |  |
|--|--|
| Integrated connection type             | Shielded RJ45 copper cable   |
| Transmission support medium            | Twisted shielded pairs cable CAT 5E for copper cable   |
| Maximum cable distance between devices | 100 m copper cable   |
| Ethernet service                       | Configuration via web server<br>VLAN<br>Multicast filtering<br>Data stream control<br>IGMP Snooping<br>SNMP-Traps and SYSLOG |
| Communication service                  | TFTP<br>Quality of Service (QoS)<br>Port monitoring<br>Port mirroring<br>Address conflict detection                          |

|                                      |   |
|--------------------------------------|---|
| Diagnostics run time                 | Signal contact<br>Self test   |
| Maximum number of switches in a ring | 50  |
| Redundancy                           | HiPER ring<br>RSTP<br>Redundant network coupling  |
| [Us] rated supply voltage            | 12...48 V   |
| Supply voltage limits                | 9.6...60 V DC SELV<br>18...30 V AC SELV   |
| Power consumption in W               | 5.3 W   |
| Electrical connection                | Removable connector 6 ways power supply   |
| Mounting support                     | 35 mm symmetrical DIN rail  |
| Marking                              | CE<br>UL<br>RCM<br>EtherNet/IP  |
| Function available                   | Alarms (Traps)<br>System information<br>Report<br>Trap log  |
| Local signalling                     | 1 dual colour LED (green/yellow) for P1 P2 power supplies<br>1 LED (red) for fault<br>1 dual colour LED (green/yellow) for ring manager<br>1 LED (green) for stand-by<br>1 LED per channel (green) for link status<br>1 LED per channel (yellow) for ACT<br>Device status |
| Alarm output                         | 1 voltfree contact 1 A  |
| Alarm function                       | Power supply fault<br>Data link status<br>Redundancy ring fault<br>Switch fault   |
| Ethernet cabling system              | TF switches   |
| MTBF reliability                     | 489136.0 H  |
| Width                                | 74 mm   |
| Height                               | 131 mm  |
| Depth                                | 111 mm  |
| Net weight                           | 0.41 kg   |

## Environment

|                                       |  |
|---------------------------------------|--|
| Ambient air temperature for operation | 0...60 °C  |
| Relative humidity                     | 10...95 % non-condensing   |
| IP degree of protection               | IP20   |
| Directives                            | 2014/35/EU - low voltage directive<br>2014/30/EU - electromagnetic compatibility |
| Standards                             | UL 508<br>EN/IEC 61131<br>IEC 61850-3  |
| Product certifications                | CE<br>UL<br>RCM<br>ODVA EtherNet/IP<br>BV<br>GL                                  |

## Packing Units

|                              |       |
|------------------------------|-------|
| Unit Type of Package 1       | PCE   |
| Number of Units in Package 1 | 1     |
| Package 1 Weight             | 600 g |
| Package 1 Height             | 13 cm |

|                  |       |
|------------------|-------|
| Package 1 width  | 16 cm |
| Package 1 Length | 24 cm |


### Offer Sustainability

|                            |   |
|----------------------------|---|
| Sustainable offer status   | Green Premium product   |
| REACH Regulation           | <a href="#">REACH Declaration</a>   |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a>                           |
| Mercury free               | Yes   |
| RoHS exemption information | <a href="#">Yes</a>   |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>  |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>   |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

### Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

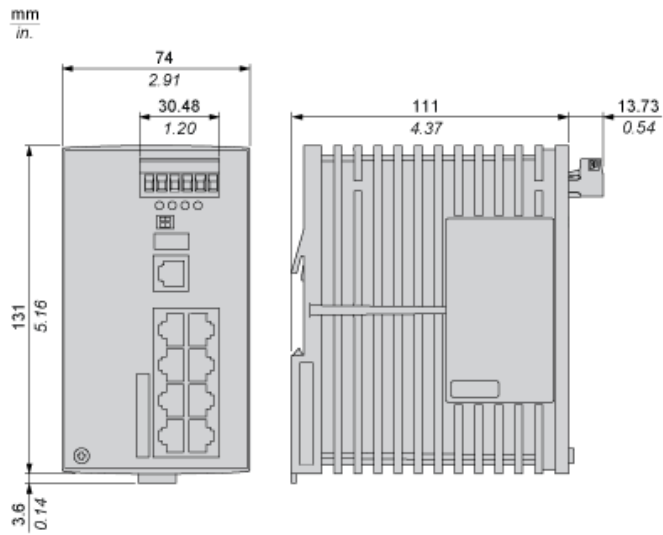

TCSESM083F23F0 is replaced by:



### Switches MCSESM083F23F0

Modicon Managed Switch - 8 ports for copper

Qty 1

Reason for Substitution: End of life | Substitution date: 01 January 2021