

Device Modeling Report

COMPONENTS: MOSFET (Professional Model)
PART NUMBER: 2SK2782
MANUFACTURER: TOSHIBA
REMARK: Body Diode (Professional Model) /
ESD Protection Diode




Bee Technologies Inc.

MOSFET MODEL

PSpice model parameter	Model description
LEVEL	
L	Channel Length
W	Channel Width
KP	Transconductance
RS	Source Ohmic Resistance
RD	Ohmic Drain Resistance
VTO	Zero-bias Threshold Voltage
RDS	Drain-Source Shunt Resistance
TOX	Gate Oxide Thickness
CGSO	Zero-bias Gate-Source Capacitance
CGDO	Zero-bias Gate-Drain Capacitance
CBD	Zero-bias Bulk-Drain Junction Capacitance
MJ	Bulk Junction Grading Coefficient
PB	Bulk Junction Potential
FC	Bulk Junction Forward-bias Capacitance Coefficient
RG	Gate Ohmic Resistance
IS	Bulk Junction Saturation Current
N	Bulk Junction Emission Coefficient
RB	Bulk Series Resistance
PHI	Surface Inversion Potential
GAMMA	Body-effect Parameter
DELTA	Width effect on Threshold Voltage
ETA	Static Feedback on Threshold Voltage
THETA	Mobility Modulation
KAPPA	Saturation Field Factor
VMAX	Maximum Drift Velocity of Carriers
XJ	Metallurgical Junction Depth
UO	Surface Mobility

Transconductance Characteristic

Circuit Simulation Result

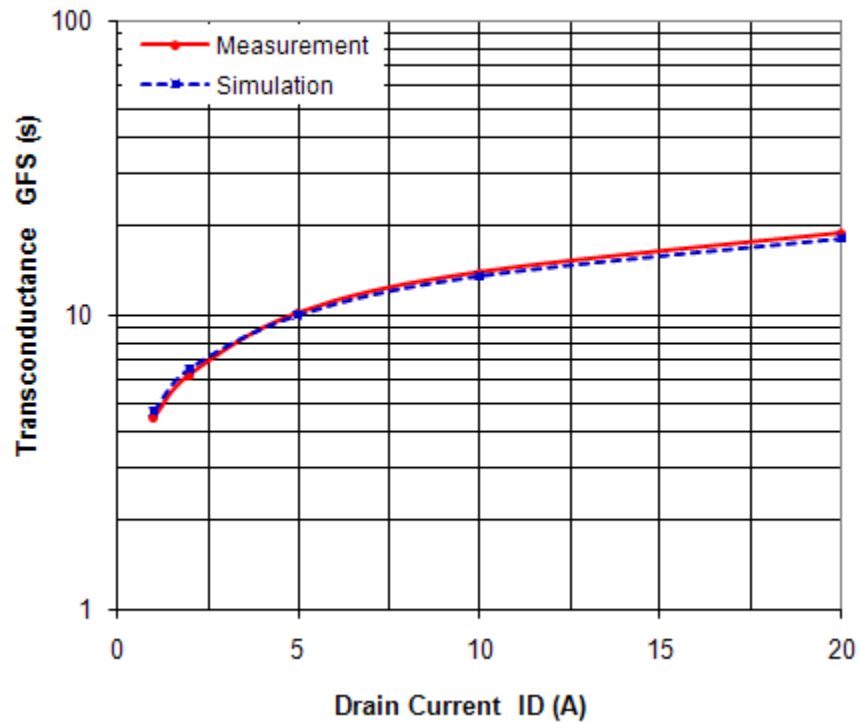


Comparison table


Id(A)	gfs		Error (%)
	Measurement	Simulation	
1	4.500	4.717	4.82
2	6.300	6.579	4.43
5	10.200	10.000	-1.96
10	14.000	13.569	-3.08
20	19.000	18.182	-4.31

V_{gs}-I_d Characteristic

Circuit Simulation result

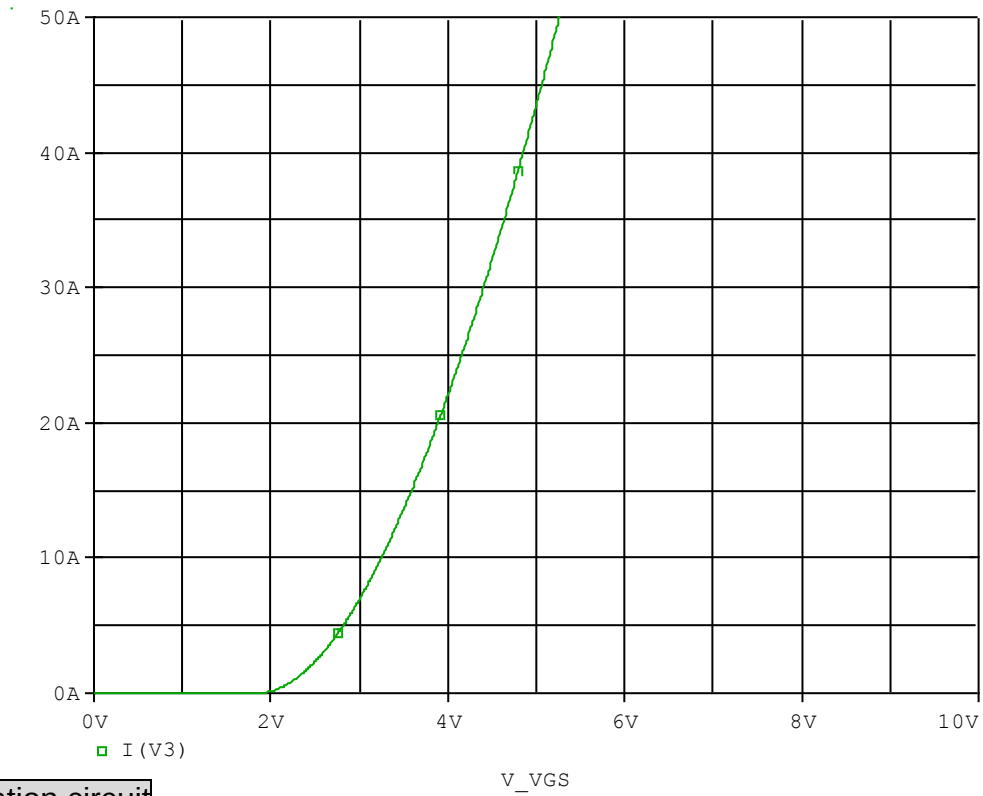


Evaluation circuit

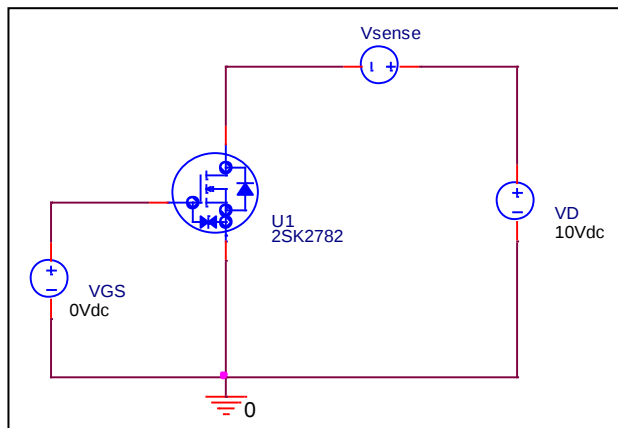

Comparison Graph

Circuit Simulation Result

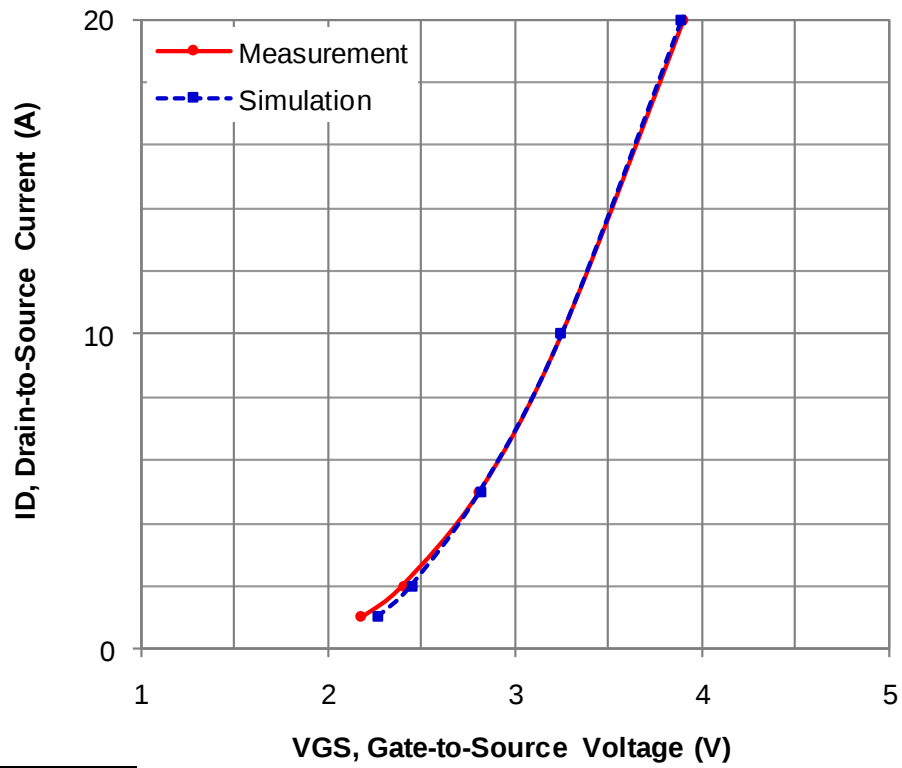


Simulation Result


I_D (A)	V_{GS} (V)		Error (%)
	Measurement	Simulation	
1	2.180	2.267	3.99
2	2.400	2.448	2.00
5	2.810	2.817	0.24
10	3.250	3.249	-0.04
20	3.900	3.889	-0.28

Rds(on) Characteristic

Circuit Simulation result

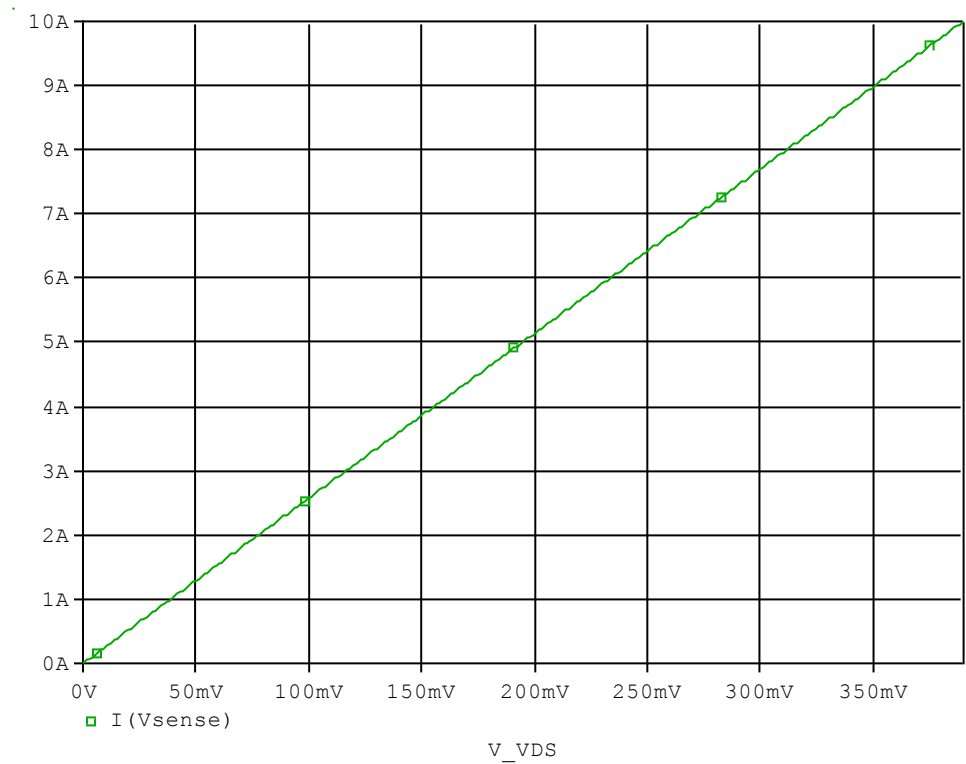

Evaluation circuit

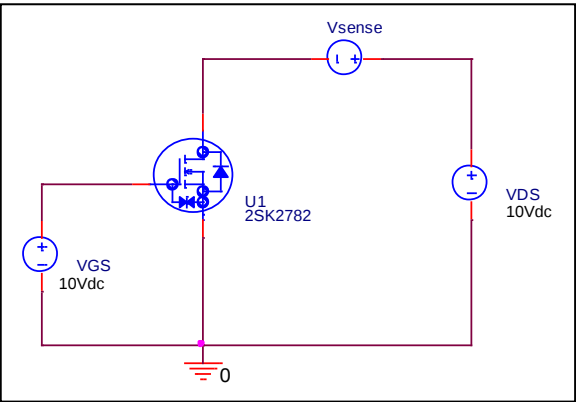


Simulation Result


$I_D = 10A, V_{GS} = 10V$		Measurement	Simulation	Error (%)
$R_{DS(on)}$	Ω	0.039	0.039	0.00

Gate Charge Characteristic

Circuit Simulation result

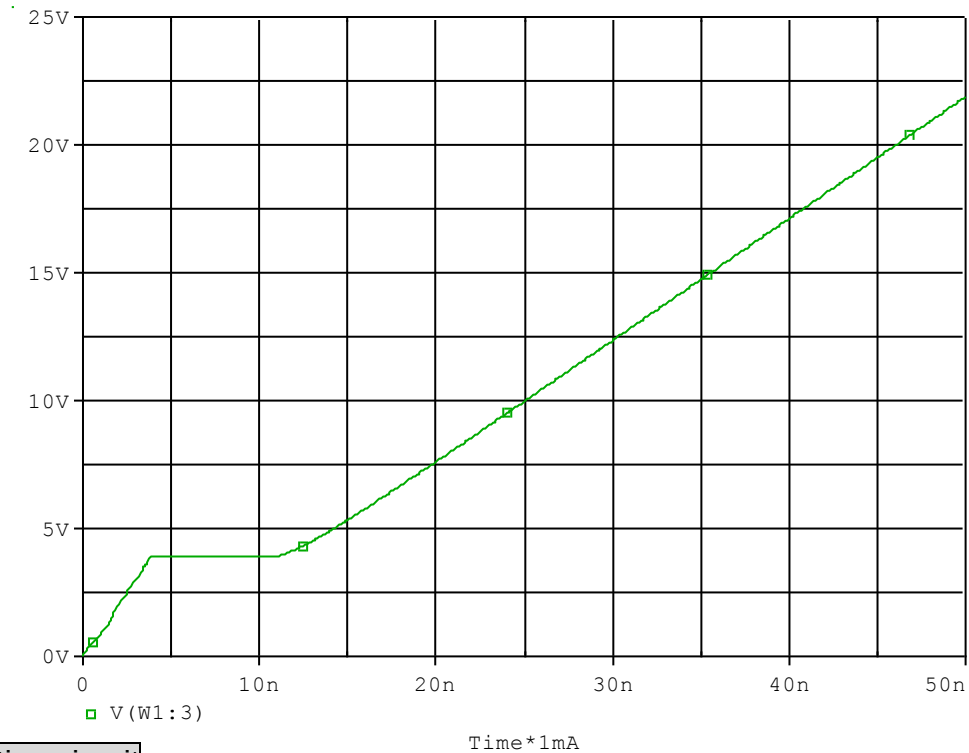


Evaluation circuit

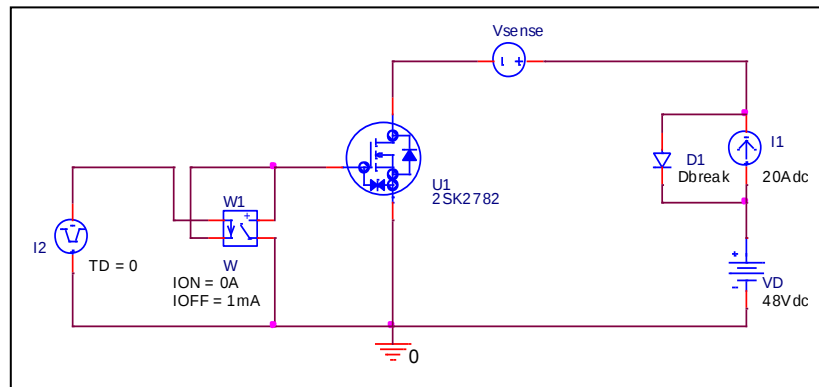

Simulation Result

$V_{DD}=48V$, $I_D=20A$, $V_{GS}=10V$		Measurement	Simulation	Error (%)
Q_{gs}	nC	4.00	3.97	-0.80
Q_{gd}	nC	7.00	6.97	-0.43
Q_g	nC	25.00	24.94	-0.24

Capacitance Characteristic

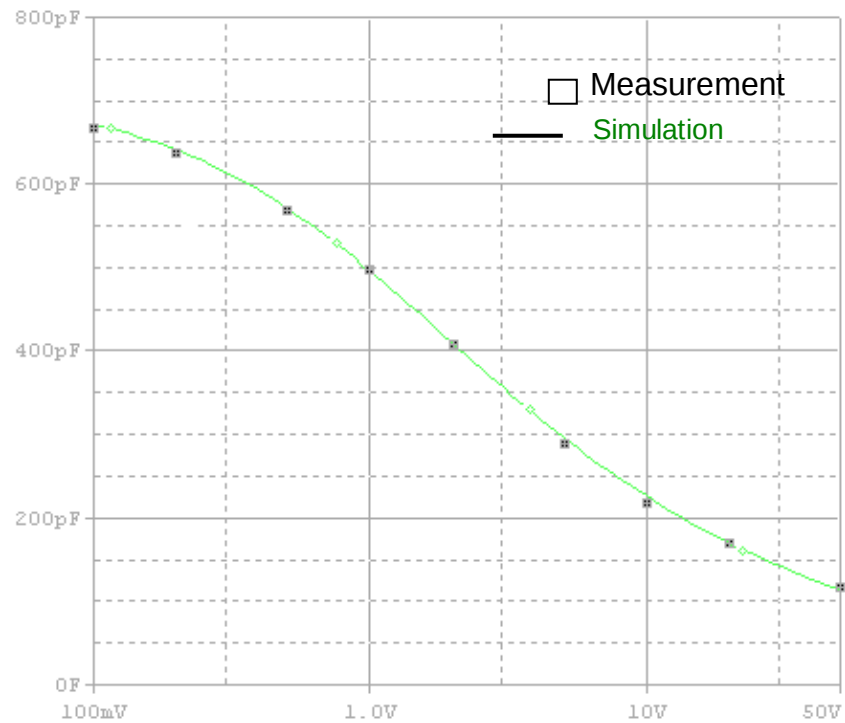


Simulation Result


V_{DS} (V)	Cbd (pF)		Error (%)
	Measurement	Simulation	
0.10	670	695	-3.60
0.20	640	660	-3.03
0.50	570	585	-2.56
1.00	500	510	-1.96
2.00	410	409	0.24
5.00	290	300	-3.33
10.00	220	231	-4.76
20.00	172	175	-1.71
50.00	119	115	3.48

Switching Time Characteristic

Circuit Simulation result

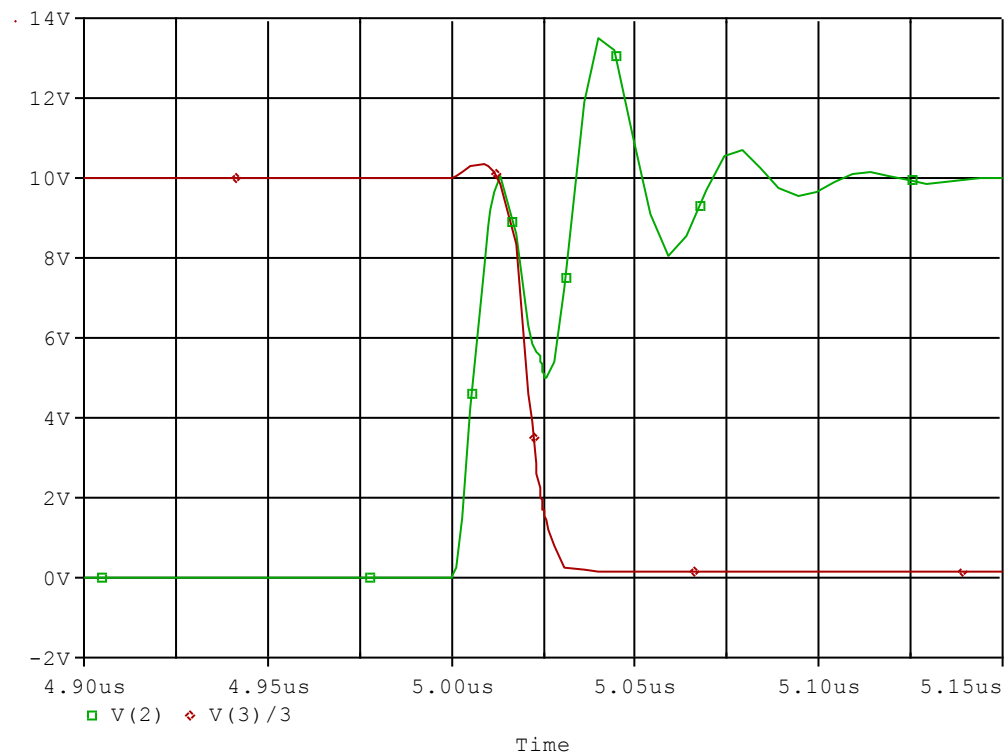

Evaluation circuit

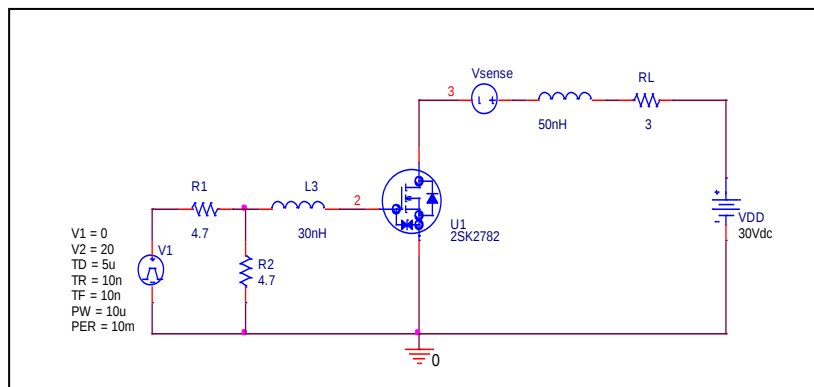


Simulation Result


$I_D=10A$, $V_{DD}=30V$ $V_{GS}=0/10V$		Measurement	Simulation	Error(%)
t_{on}	ns	25.00	24.95	-0.20

Output Characteristic

Circuit Simulation result

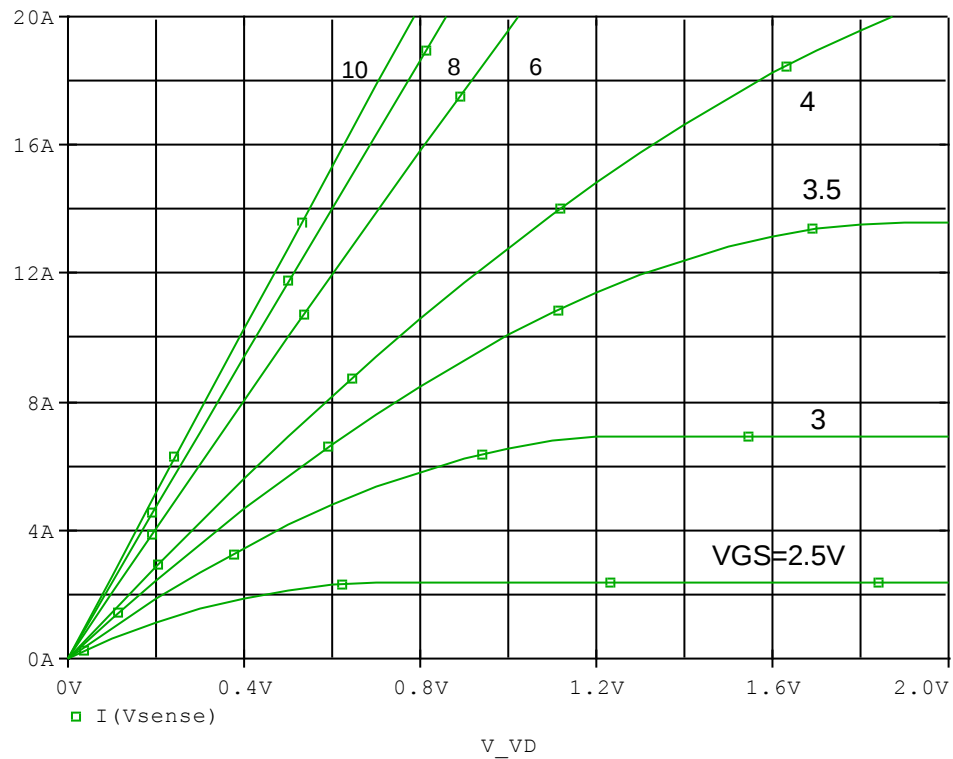


Evaluation circuit

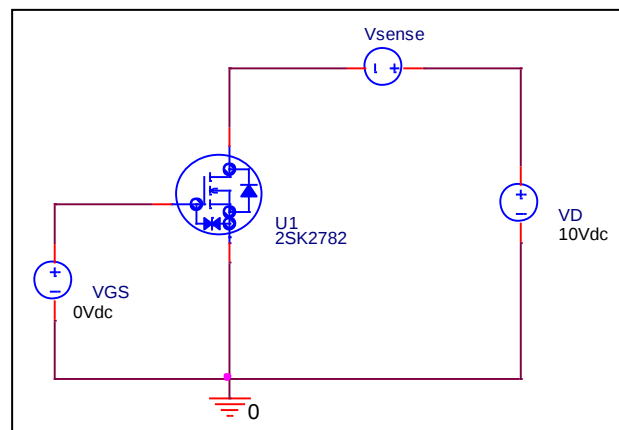


Forward Current Characteristic

Circuit Simulation Result

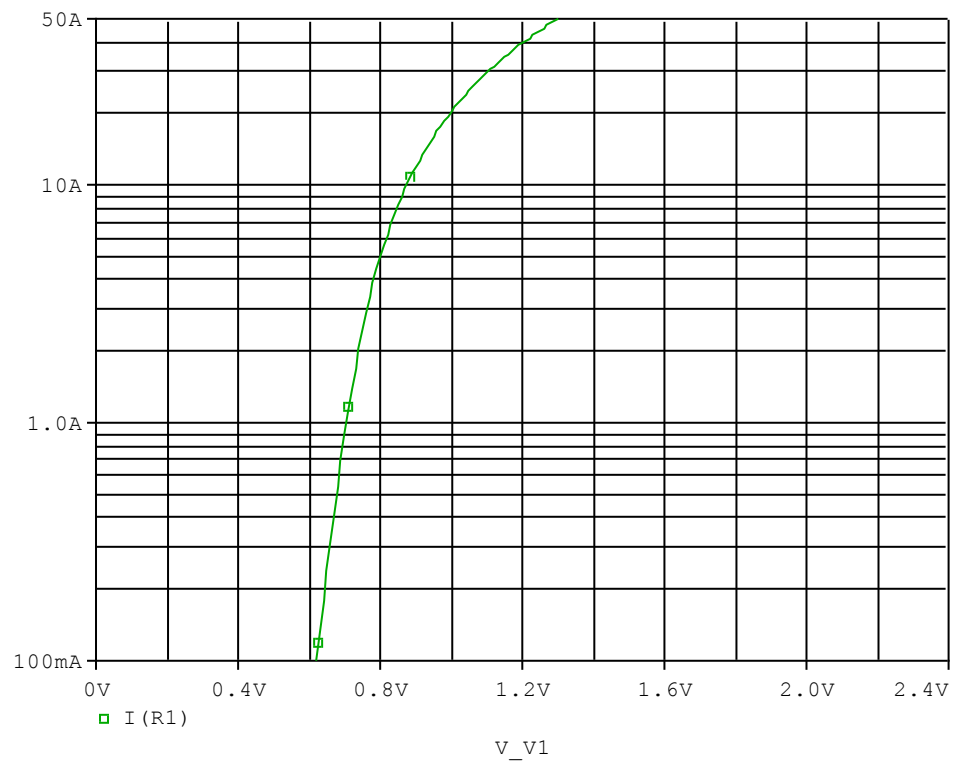


Evaluation Circuit

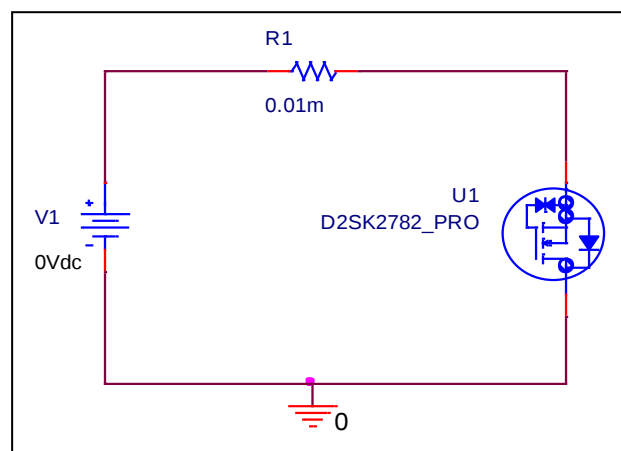

Comparison Graph

Circuit Simulation Result

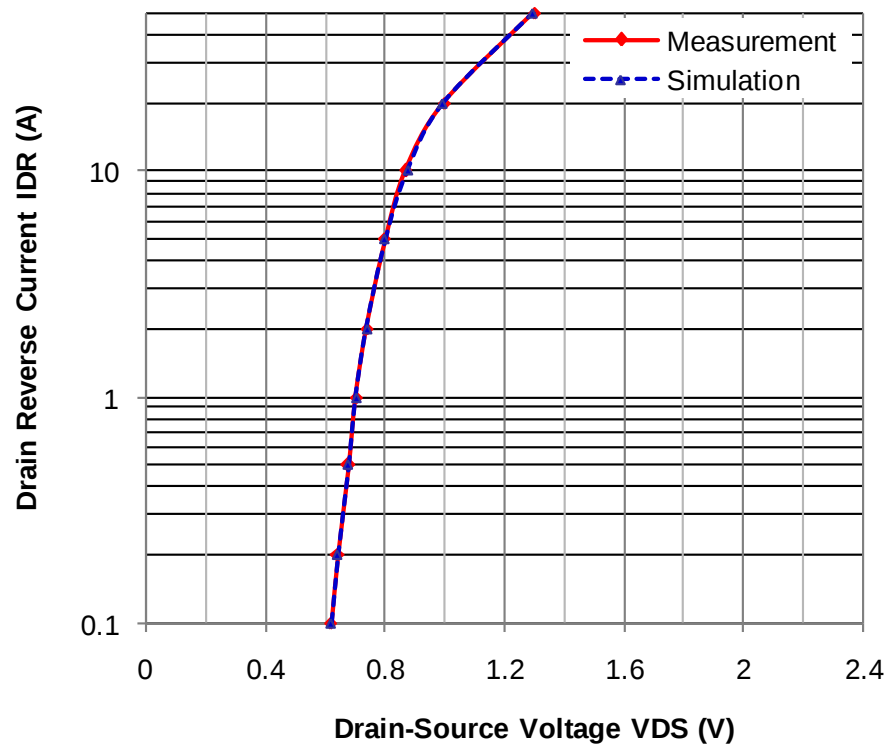


Simulation Result


IDR(A)	VSD(V)		%Error
	Measurement	Simulation	
0.1	0.6200	0.6207	0.11
0.2	0.6430	0.6437	0.11
0.5	0.6800	0.6770	-0.44
1	0.7040	0.7050	0.14
2	0.7400	0.7384	-0.22
5	0.8000	0.8002	0.02
10	0.8700	0.8746	0.53
20	1.0000	0.9962	-0.38
50	1.3000	1.2974	-0.20

Reverse Recovery Characteristics

Circuit Simulation Result

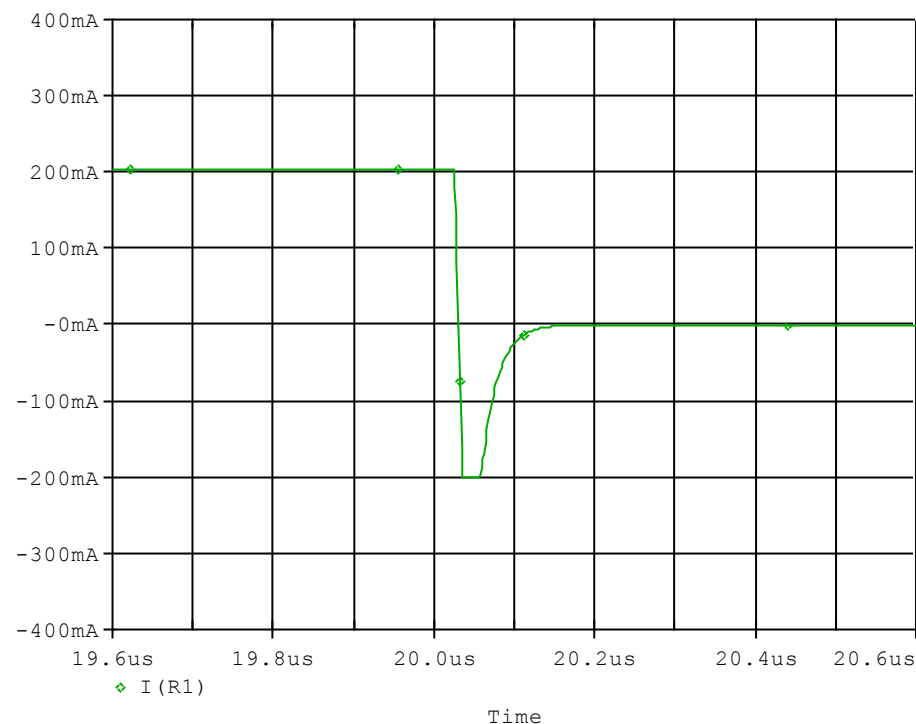

Evaluation Circuit

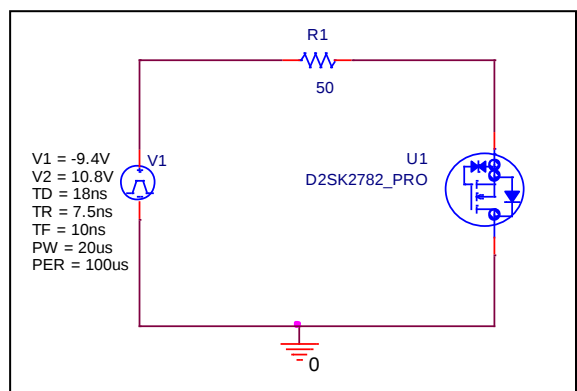


Compare Measurement vs. Simulation

		Measurement	Simulation	Error (%)
trj	ns	20.30	20.25	-0.25
trb	ns	55.00	54.79	-0.38
trr	ns	75.30	75.04	-0.35

Reverse Recovery Characteristic


Reference

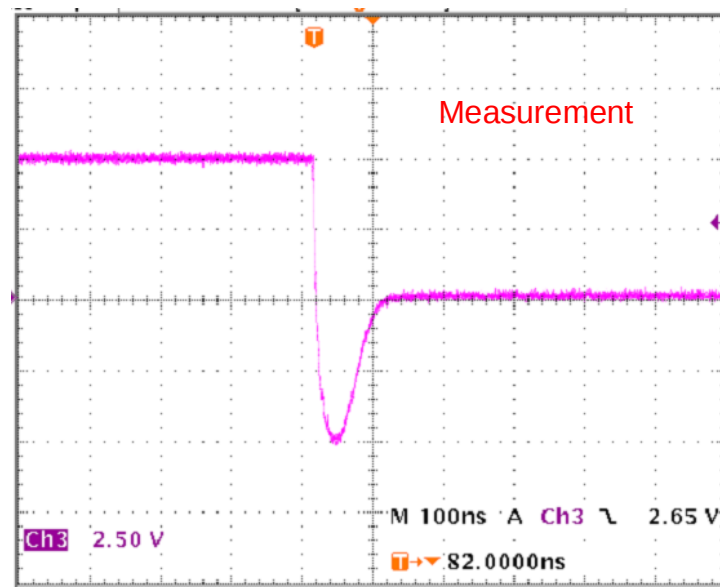

$T_{rj}=20.30(\text{ns})$

$T_{rb}=55.00(\text{ns})$

Conditions: $I_{fwd}=I_{rev}=0.2(\text{A})$, $R_I=50$

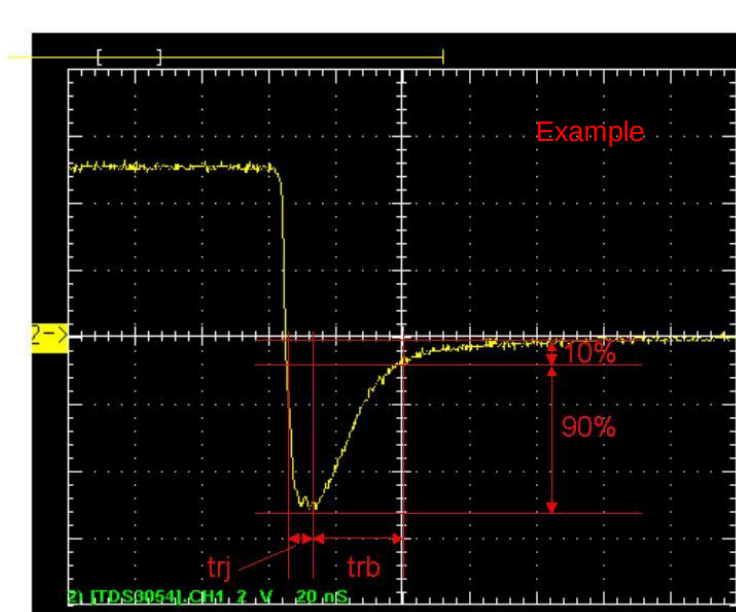


Relation between t_{rj} and t_{rb}


ESD PROTECTION DIODE SPICE MODEL

Zener Voltage Characteristic

Circuit Simulation Result

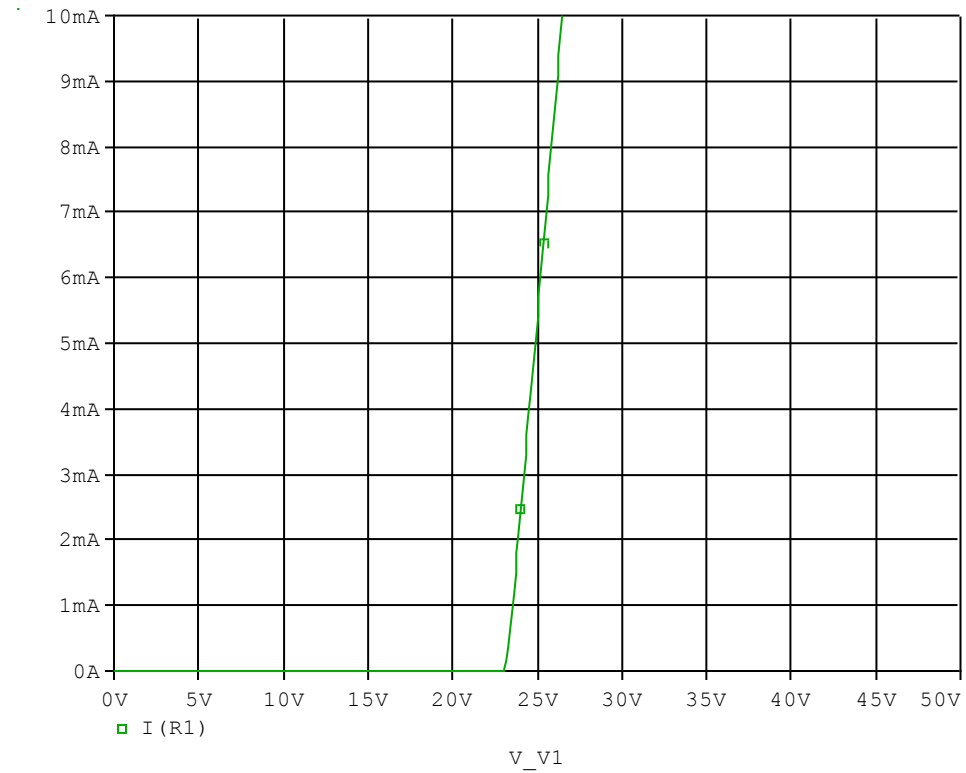

Evaluation Circuit

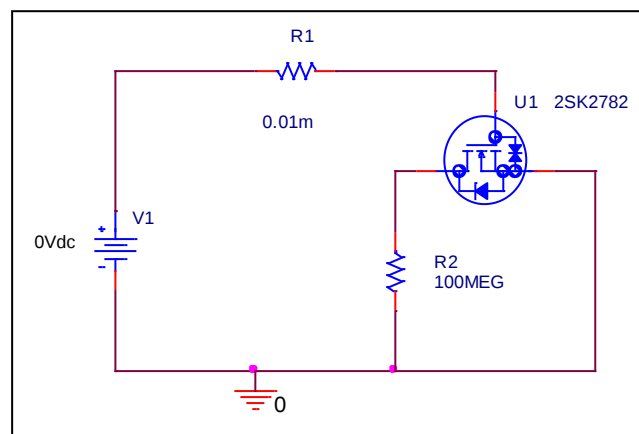

Zener Voltage Characteristic

Reference

