

Device Modeling Report

COMPONENTS:

DIODE/ SCHOOTTKY RECTIFIER / STANDARD

PART NUMBER: DF20SC9M

MANUFACTURER: SHINDENGEN




Bee Technologies Inc.


PSpice model parameter	Model description
IS	Saturation Current
N	Emission Coefficient
RS	Series Resistance
IKF	High-injection Knee Current
CJO	Zero-bias Junction Capacitance
M	Junction Grading Coefficient
VJ	Junction Potential
ISR	Recombination Current Saturation Value
BV	Reverse Breakdown Voltage(a positive value)
IBV	Reverse Breakdown Current(a positive value)
TT	Transit Time
EG	Energy-band Gap

Forward Current Characteristic

Circuit Simulation Result

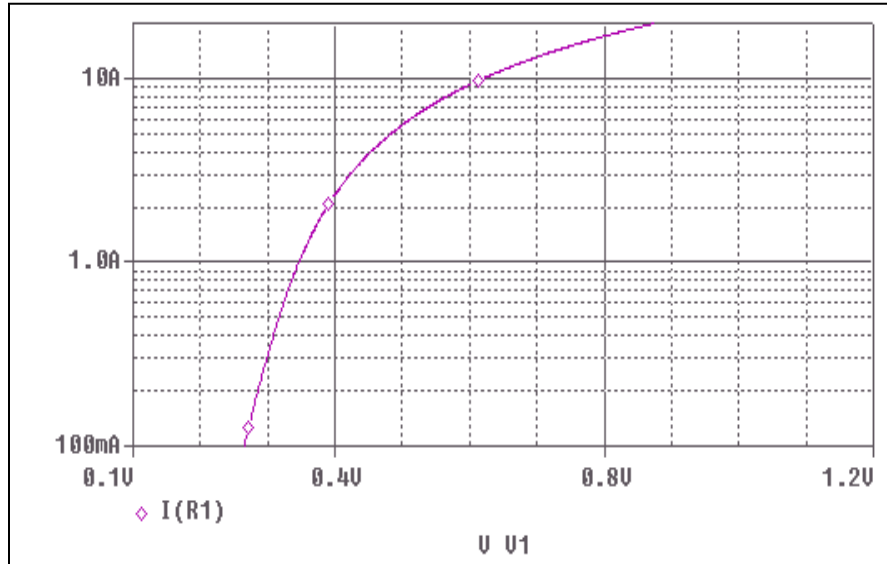


Evaluation Circuit

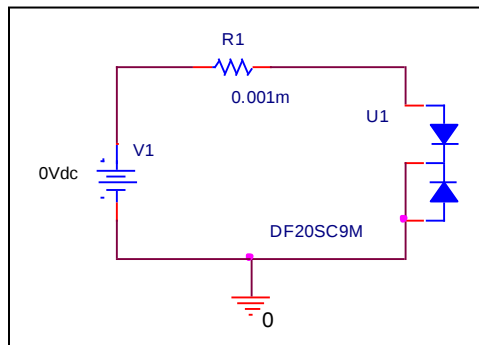

Comparison Graph

Circuit Simulation Result

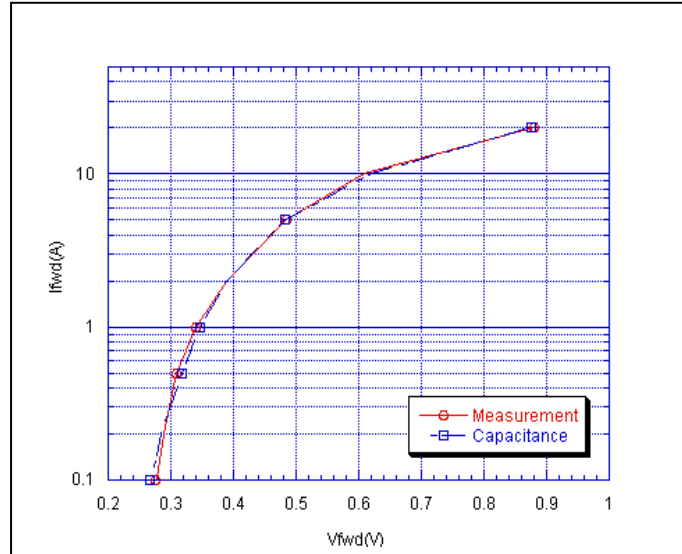


Simulation Result


I_{fwd} (A)	V_{fwd} (V) Measurement	V_{fwd} (V) Simulation	%Error
0.1	0.275	0.2676	2.69090
0.2	0.29	0.2856	1.51724
0.5	0.31	0.3174	2.38709
1	0.34	0.3462	1.82352
2	0.39	0.3888	0.30769
5	0.485	0.483	0.41237
10	0.61	0.6198	1.60655
20	0.88	0.8754	0.52272

Junction Capacitance Characteristic

Circuit Simulation Result

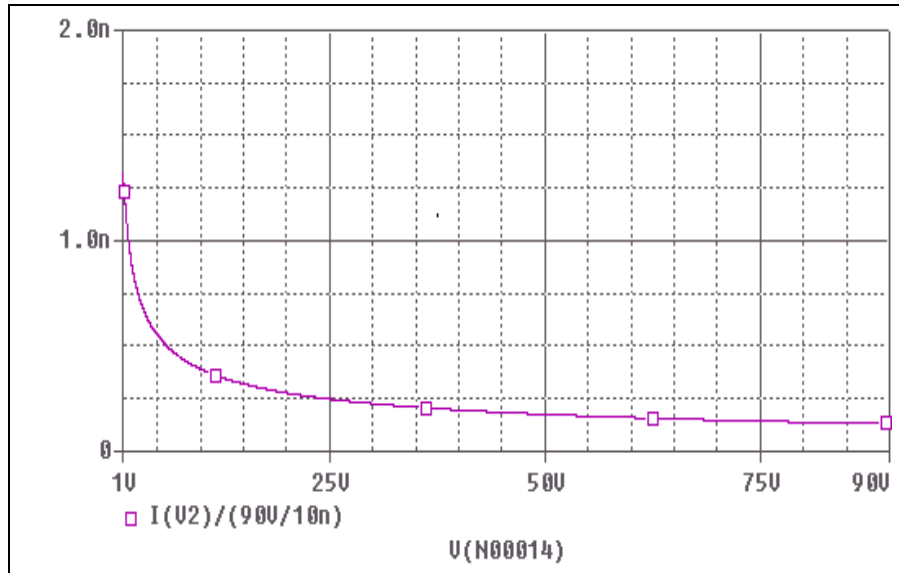


Evaluation Circuit

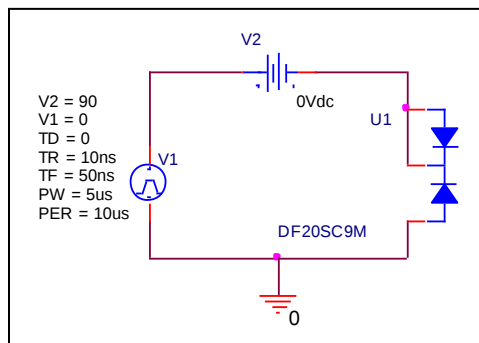

Comparison Graph

Circuit Simulation Result

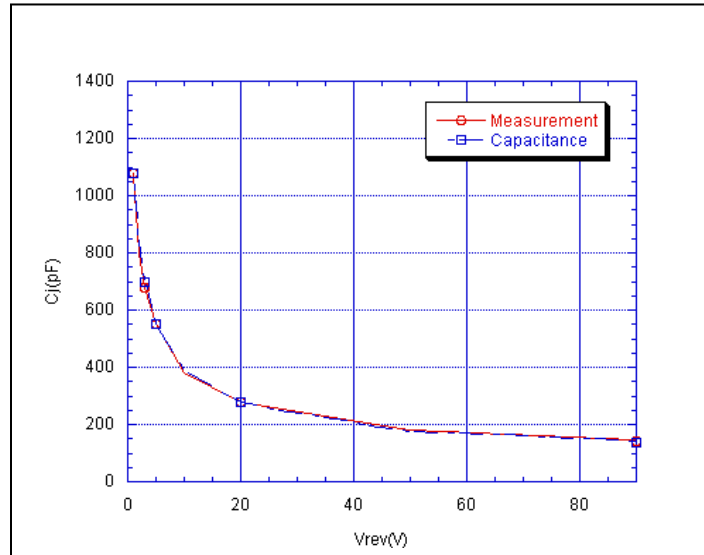

Simulation Result

Vrev(V)	Cj(pF) Measurement	Cj(pF) Simulation	%Error
1	1100.000	1080.000	-1.82
2	825.000	840.300	1.85
5	550.000	553.600	0.65
10	380.000	390.000	2.63
20	280.000	278.300	-0.61
50	180.000	176.100	-2.17