Device Modeling Report

COMPONENTS: Superior Lithium Polymer Battery (SLPB)

PART NUMBER: SLPB160460330


MUNUFACTURER: Kokam

REMARK: High Energy Density Cell




Bee Technologies Inc.

Circuit Configuration




Discharge Characteristics (Battery Voltage vs. Time)

Circuit Simulation Result

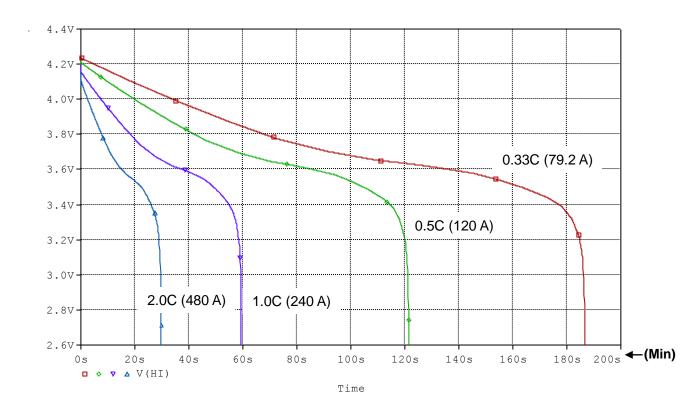


Simulation Circuit

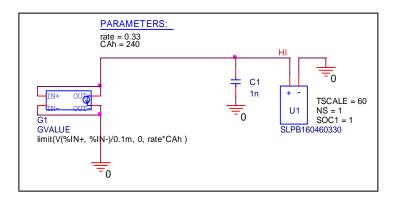

* To discharge from 100% of battery capacity, SOC1=1


Discharge Characteristics (Battery Voltage vs. State of Charge)

Circuit Simulation Result

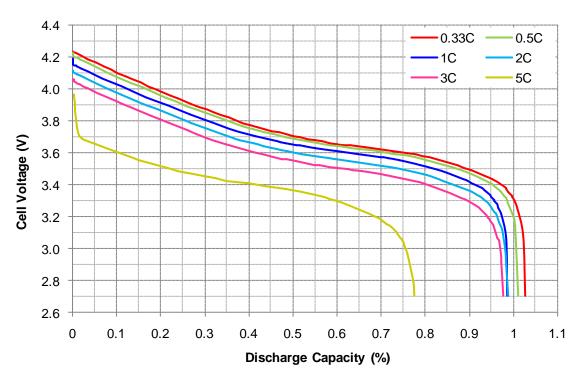

 \times SOC is a value from 0 to 1 (0~100%)


Simulation Circuit

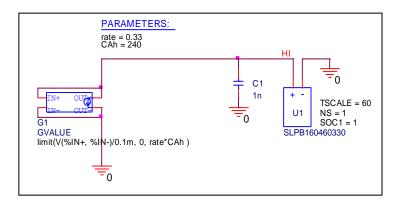

* To discharge from 100% of battery capacity, SOC1=1


Discharge Characteristics

Reference

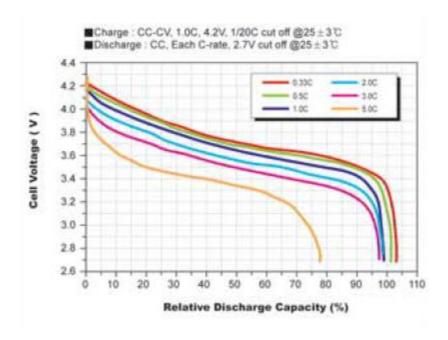


Charge Characteristics (Battery Voltage vs. Time)

Circuit Simulation Result

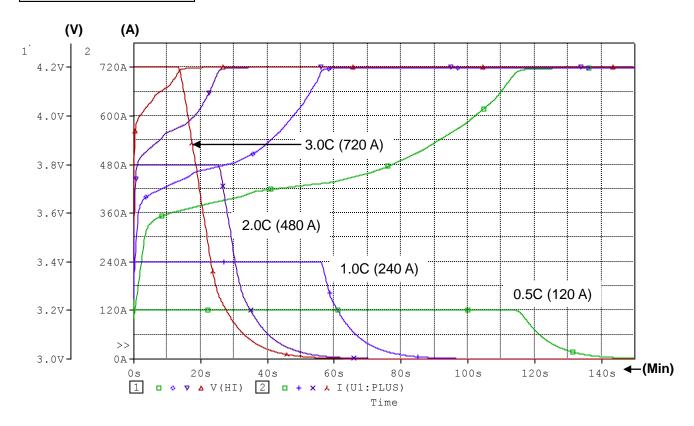


Simulation Circuit

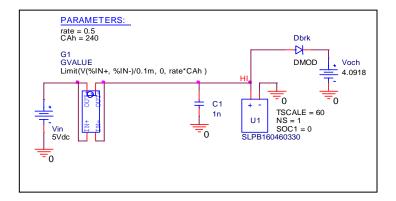

* Tscale turns minute into seconds.

Charge Characteristics (Battery Voltage vs. Time)

Reference

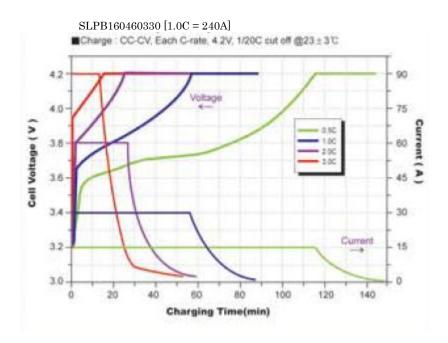

Data Information

No. SLPB160460330		
Typical Capacity		240 [Ah]
Nominal Voltage		3.7 [V]
Charge Condition	Max. Current	240 [A]
	Voltage	4.2 [V]
Discharge Condition	Continuous Current	240 [A]
	Peak Current	480 [A]
	Cut-off Voltage	2.7 [V]