

# **Device Modeling Report**

COMPONENTS: Laser Diode  
PART NUMBER: DL-3147-141  
MANUFACTURER: SANYO




**Bee Technologies Inc.**


PSpice model parameter	Model description
IS	Saturation Current
N	Emission Coefficient
RS	Series Resistance
IKF	High-injection Knee Current
CJO	Zero-bias Junction Capacitance
M	Junction Grading Coefficient
VJ	Junction Potential
ISR	Recombination Current Saturation Value
BV	Reverse Breakdown Voltage(a positive value)
IBV	Reverse Breakdown Current(a positive value)
TT	Transit Time

## Optical Output Power vs. Forward current characteristics

Circuit simulation result

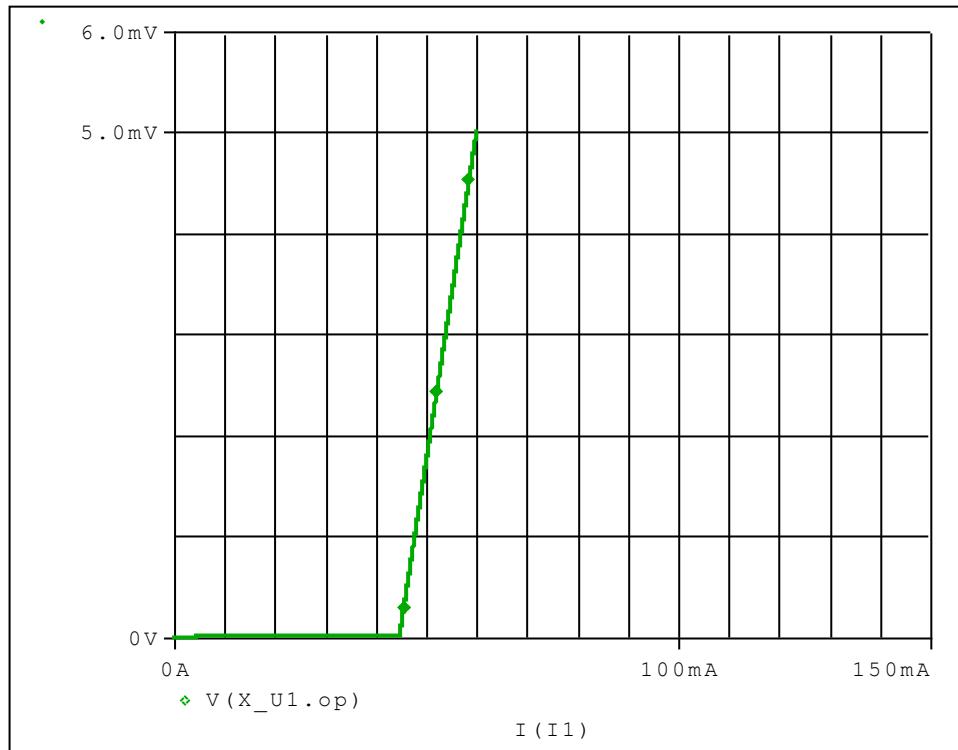


Evaluation circuit

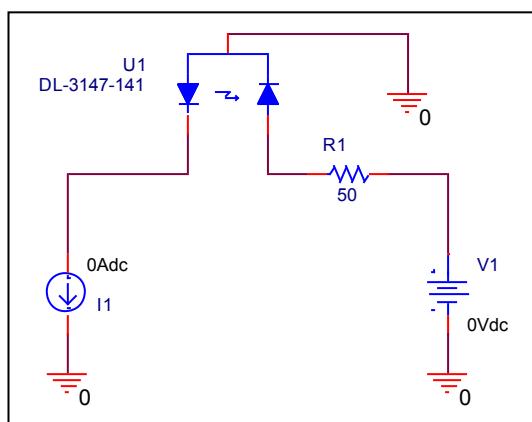

## Comparison graph

Circuit simulation result

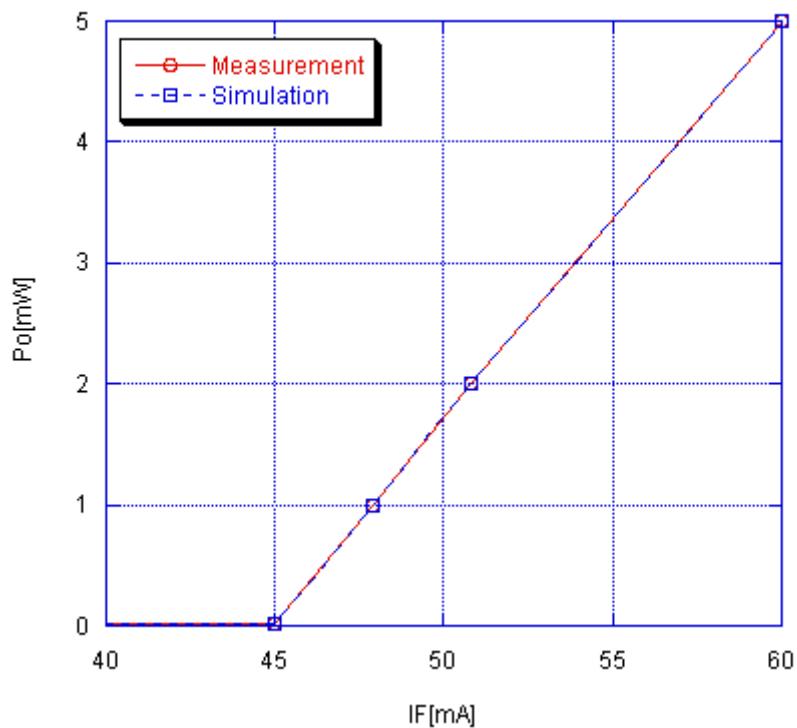


Simulation Result


Po[mW]	IF[mA]		Error (%)
	Measurement	Simulation	
0.0100	45.000	45.000	0.000
1.000	47.900	47.880	0.042
2.000	50.780	50.780	0.000
5.000	60.000	60.000	0.000

## Monitor Current vs. Optical Output Power characteristics

Circuit simulation result

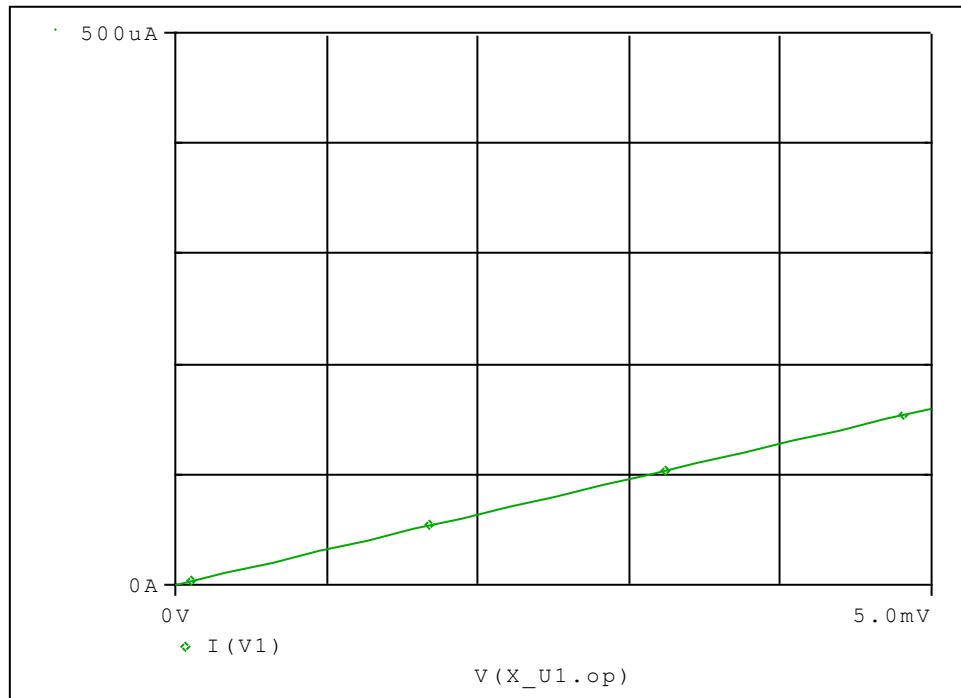


Evaluation circuit

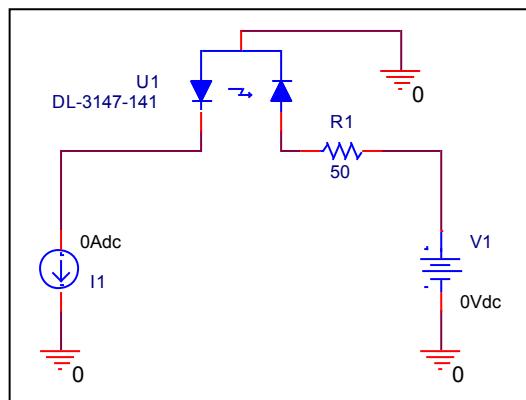

## Comparison graph

Circuit simulation result

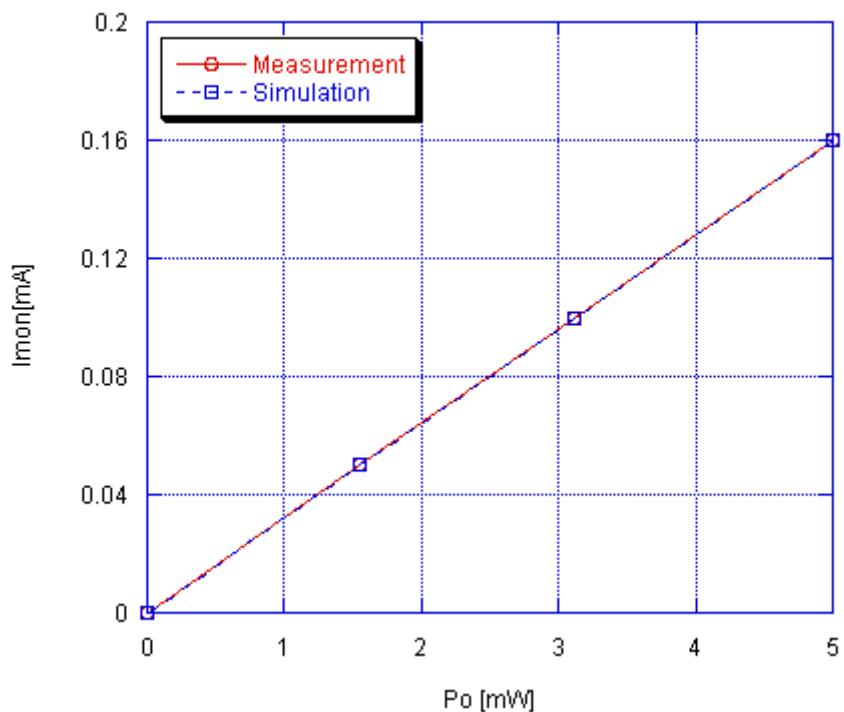

Simulation Result

$I_{mon}$ [mA]	Po [mW]		Error (%)
	Measurement	Simulation	
0.050	1.550	1.550	0.000
0.100	3.120	3.120	0.000
0.160	5.000	5.000	0.000