

VS50E/L**SPECIFICATIONS**

A239-01-01/L-B

ITEMS		MODEL		VS50E-3/L	VS50E-5/L	VS50E-12/L	VS50E-15/L	VS50E-24/L	VS50E-48/L
1	Nominal Output Voltage	V		3.3	5	12	15	24	48
2	Maximum Output Current	A		10	10	4.3	3.5	2.5	1.3
3	Maximum Output Power	W		33.0	50.0	51.6	52.5	60.0	62.4
4	Efficiency (Typ) (*1)	%		80	85	85	85	85	87
5	Input Voltage Range (*2)	-		85 - 132VAC (47 - 63Hz)					
6	Input Current (Typ) (*1)	A		0.9	1.1			1.3	
7	Inrush Current (Typ) (*1)	-		30A at Cold Start					
8	Output Voltage Range	V		2.97 - 3.63	4.5 - 5.5	10.8 - 13.2	13.5 - 16.5	21.6 - 26.4	43.2 - 52.8
9	Maximum Ripple & Noise (*3) 0≤Ta≤70°C	mV		120	120	150	150	150	200
	(*3) -10≤Ta<0°C	mV		160	160	180	180	180	240
10	Maximum Line Regulation (*3)(*4)	mV		20	20	48	60	96	192
11	Maximum Load Regulation (*3)(*5)	mV		40	40	96	120	150	240
12	Temperature Coefficient (*3)	-		Less than 0.02% / °C					
13	Over Current Protection (*6)	A		10.5 <	10.5 <	4.51 <	3.67 <	2.62 <	1.36 <
14	Over Voltage Protection (*7)	V		3.80 - 4.46	5.75 - 6.75	13.8 - 16.2	17.3 - 20.3	27.6 - 32.4	55.2 - 64.8
15	Hold-up Time (Typ) (*1)	-		20ms					
16	Leakage Current (*8)	-		Less than 0.5mA					
17	Parallel Operation	-		-					
18	Series Operation	-		Possible					
19	Operating Temperature (*9)	-		Convection : -10 to +70°C (-10 to +50°C:100%, +60°C:70%, +70°C:20%)					
20	Operating Humidity	-		30 to 90%RH (No Condensing)					
21	Storage Temperature	-		-30 to +85°C					
22	Storage Humidity	-		10 to 95%RH (No Condensing)					
23	Cooling	-		Convection Cooling					
24	Withstand Voltage	-		Input - FG : 2kVAC (10mA), Input - Output : 2kVAC (10mA) Output - FG : 500VAC (20mA) for 1min					
25	Isolation Resistance	-		More than 100MΩ at 25°C and 70%RH Output - FG : 500VDC					
26	Vibration	-		At no operating, 10 - 55Hz (Sweep for 1min) 19.6m/s² Constant, X,Y,Z 1hour each.					
27	Shock	-		Less than 196.1m/s²					
28	Safety	-		Approved by UL62368-1, CSA62368-1, EN62368-1, UL60950-1, CSA60950-1, EN60950-1 (Expire date of 60950-1 : 20/12/2020), EN50178(OV II), Designed to meet Den-an Appendix12 (J60950-1)					
29	Conducted Emission	-		Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B					
30	Radiated Emission	-		Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B					
31	Immunity	-		Designed to meet IEC61000-4-2(Level 2,3), -3(Level 3), -4(Level 3), -5(Level 2,3), -6(Level 3), -8(Level 4), -11					
32	Weight (Typ)	g		250					
33	Size (W x H x D)	mm		60 x 36 x 162 (Refer to Outline Drawing)					

*Read instruction manual carefully, before using the power supply unit.

=NOTES=

- *1. At 100VAC, Ta=25°C, nominal output voltage and maximum output power.
- *2. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 120VAC(50/60Hz).
- *3. Please refer to Fig. A for measurement of line & load regulation and ripple voltage.
- *4. 85 - 132VAC, constant load.
- *5. No load-Full load, constant input voltage.
- *6. Fold back current limit with automatic recovery.


Avoid to operate at over load or short circuit condition for more than 30seconds.

- *7. OVP circuit will shut the output down, manual reset (Re power on).
- *8. Measured by the each measuring method of UL, CSA, EN and DENAN(at 60Hz), Ta=25°C.

- *9. Ratings - Derating at standard mounting. Refer to output derating curve(A239-01-02_).

- Load (%) is percent of maximum output power or maximum output current, whichever is greater.

Fig. A

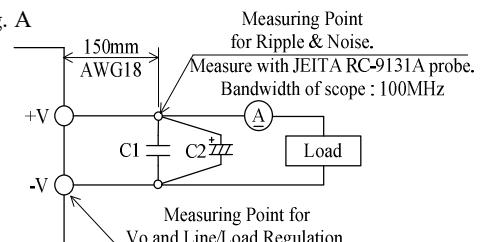

C1 : Film Cap. 0.1 μF

C2 : Elec. Cap. 100 μF