

ZWS75BAF/CO2**SPECIFICATIONS**

A248-01-01/CO2-C

ITEMS		MODEL		ZWS75BAF -3/CO2	ZWS75BAF -5/CO2	ZWS75BAF -12/CO2	ZWS75BAF -15/CO2	ZWS75BAF -24/CO2	ZWS75BAF -48/CO2	
1	Nominal Output Voltage	V		3.3	5	12	15	24	48	
2	Maximum Output Current	A		15	15	6.3	5.0	3.2	1.6	
3	Maximum Output Power	W		49.5	75.0	75.6	75.0	76.8	76.8	
4	Efficiency (Typ.) (*1)	100VAC 200VAC	%	76 78	82 84	83 85	84 86	84 87	85 88	
5	Input Voltage Range (*2)	-				85 - 265VAC (47 - 63Hz) or 120 - 370VDC				
6	Input Current (Typ.) (*1)	A	0.70/0.35			0.95/0.5				
7	Inrush Current (Typ.) (*1)(*3)	-			14A at 100VAC, 28A at 200VAC, Ta=25°C, Cold Start					
8	PFHC	-				Designed to meet IEC61000-3-2				
9	Power Factor (Typ.) (*1)	-	0.96/0.85			0.97/0.91				
10	Output Voltage Range	V	2.97 - 3.63	4.5 - 5.5	10.8 - 13.2	13.5 - 16.5	21.6 - 26.4	39.5 - 52.8		
11	Maximum Ripple & Noise (*4) (*4)-10≤Ta≤0°C	mV	120 160	120 160	150 180	150 180	150 180	200 240		
12	Maximum Line Regulation (*4)(*5)	mV	20	20	48	60	96	192		
13	Maximum Load Regulation (*4)(*6)	mV	40	40	96	120	150	240		
14	Temperature Coefficient (*4)	-			Less than 0.02% / °C					
15	Over Current Protection (*7)	A	15.7-	15.7-	6.61-	5.25-	3.36-	1.68-		
16	Over Voltage Protection (*8)	V	3.79 - 4.95	5.75 - 7.0	13.8 - 16.2	17.3 - 20.3	27.6 - 32.4	55.2 - 64.8		
17	Hold-up Time (Typ.) (*1)	-				20ms				
18	Leakage Current (*9)	-			Less than 0.5mA.	0.2mA(Typ) at 100VAC / 0.4mA(Typ) at 230VAC				
19	Remote Control	-				-				
20	Parallel Operation	-				-				
21	Series Operation	-				Possible				
22	Operating Temperature (*10)	-			Convection : -10 to +70°C (-10 to +50°C:100%, +60°C:75%, +70°C:50%)					
23	Operating Humidity	-			30 to 90%RH (No Condensing)					
24	Storage Temperature	-			-30 to +75°C					
25	Storage Humidity	-			10 to 90%RH (No Condensing)					
26	Cooling	-			Convection Cooling					
27	Withstand Voltage	-			Input - FG : 2kVAC (10mA), Input - Output : 3kVAC (10mA) Output - FG : 500VAC (20mA) for 1min					
28	Isolation Resistance	-			More than 100MΩ at 25°C and 70%RH Output - FG : 500VDC					
29	Vibration	-			At no operating, 10 - 55Hz (Sweep for 1min) 19.6m/s² Constant, X,Y,Z 1hour each.					
30	Shock	-			Less than 196.1m/s²					
31	Safety	-			Approved by UL62368-1, CSA62368-1, EN62368-1, UL60950-1, CSA60950-1, EN60950-1 (Expire date of 60950-1 : 20/12/2020), EN50178 (OV II) Designed to meet DENAN at 100VAC Only.					
32	Conducted Emission	-			Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B					
33	Radiated Emission	-			Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B					
34	Immunity	-			Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11					
35	Weight (Typ.)	g			230					
36	Size (W x H x D)	mm			50 x 33 x 150 (Refer to Outline Drawing)					

*Read instruction manual carefully, before using the power supply unit.

=NOTES=

*1. At 100VAC/200VAC, Ta=25°C, nominal output voltage and maximum output power.

*2. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC (50/60Hz).

*3. Not applicable for inrush current to a noise filter for less than 0.2ms.

*4. Please refer to Fig. A for measurement of Vo, line & load regulation and ripple voltage.

*5. 85 - 265VAC, constant load.

*6. No load-Full load, constant input voltage.

*7. Hiccup with automatic recovery.

Avoid to operate at over load or short circuit condition for more than 30seconds.

*8. OVP circuit shut down the output, manual reset (Re power on) to get output voltage.

*9. Measured by the each measuring method of UL, CSA, EN and DENAN (at 60Hz), Ta=25°C.


*10. Output Derating

- Derating at standard mounting. Refer to output derating curve (A248-01-02_).

- About a force air cooling, refer to output derating curve (A248-01-03_).

- Load (%) is percent of maximum output power or maximum output current, whichever is greater.

Fig. A

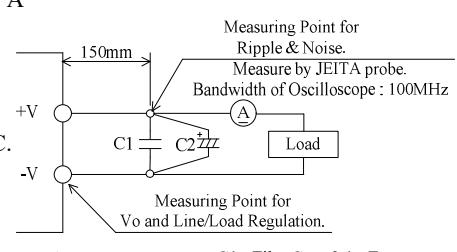

C1 : Film Cap. 0.1 μF

C2 : Elec. Cap. 100 μF