


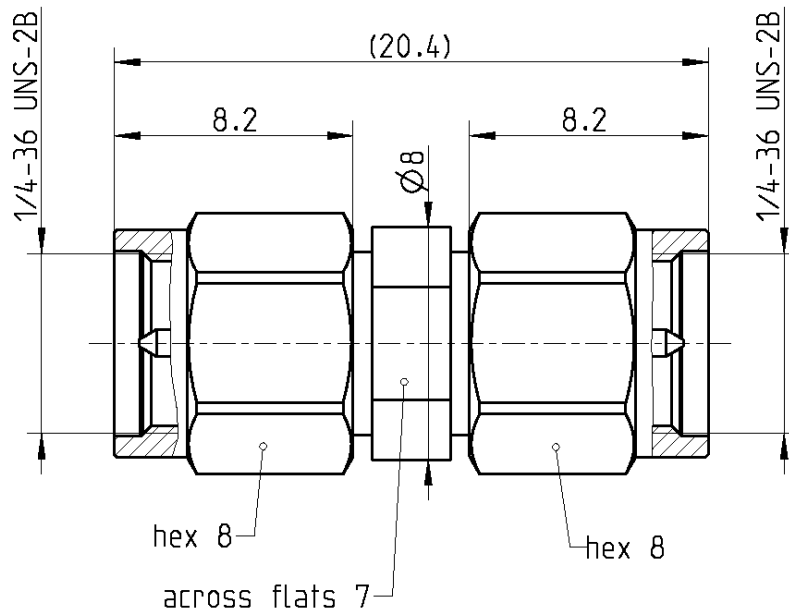

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to
Mechanically compatible with

IEC 61169-35
RPC-3.50 and SMA

Documents

N/A

Material and plating

Connector parts

Center contact
Outer contact
Coupling nut
Dielectric
Gasket

Material

CuBe
Stainless steel
Stainless steel
PS
Silicone

Plating

Gold, min. 1.27 µm, over chemical nickel
Passivated
Passivated

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/05.10/6.1

Technical Data Sheet				Rosenberger			
RPC-2.92		Adaptor Plug - Plug		02S121-S00S3			
Electrical data Impedance Frequency Return loss Insertion loss Insulation resistance Center contact resistance Outer contact resistance Test voltage Working voltage RF-leakage 50 Ω DC to 40 GHz ≥ 21 dB, DC 40 GHz ≤ 0.04 x √f(GHz) dB ≥ 5 GΩ ≤ 3.0 mΩ ≤ 2.0 mΩ 750 V rms 250 V rms ≥ 100 dB up to 1 GHz							
Mechanical data Mating cycles Center contact captivation Coupling test torque Recommended torque ≥ 500 ≥ 20 N 1.70 Nm 0.80 Nm to 1.10 Nm							
Environmental data Temperature range Thermal shock Corrosion Vibration Shock Moisture resistance RoHS -40°C to +85°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 101, Condition B MIL-STD-202, Method 204, Condition D MIL-STD-202, Method 213, Condition I MIL-STD-202, Method 106 compliant							
Tooling N/A							
Suitable cables N/A							
Weight 5.2 g/pce							
While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.							
Draft		Date		Rev.		Engineering change number	
Approved		Date		Name		Date	
Herbert Babinger		15.07.04		Martin Moder		16.11.15	
c00		15-1421		Maik Knoll		16.11.15	
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de			Page 2 / 2