



| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|----------|-------------|---|------|-----------------|
| 1 | 50-00426 | Connector, USB B receptacle | 1 | |
| 2 | 50-00428 | Connector, USB A micro male | 1 | |
| 3 | 30-00088 | Wire, 4C, 1PR + 2C, 28 AWG, UL2725, 30V, 80C, 3.6 mm, shielded, VW-1, PVC, 79A, USB 2.0 | 1 | |
| 4 | 24-00057 | Overmold, PVC, black | 1 | |
| 5 | 24-00064 | Overmold, PVC, black | 1 | |
| 6 | Label 658 | Adhesive, flag, 10x60 mm | 1 | |

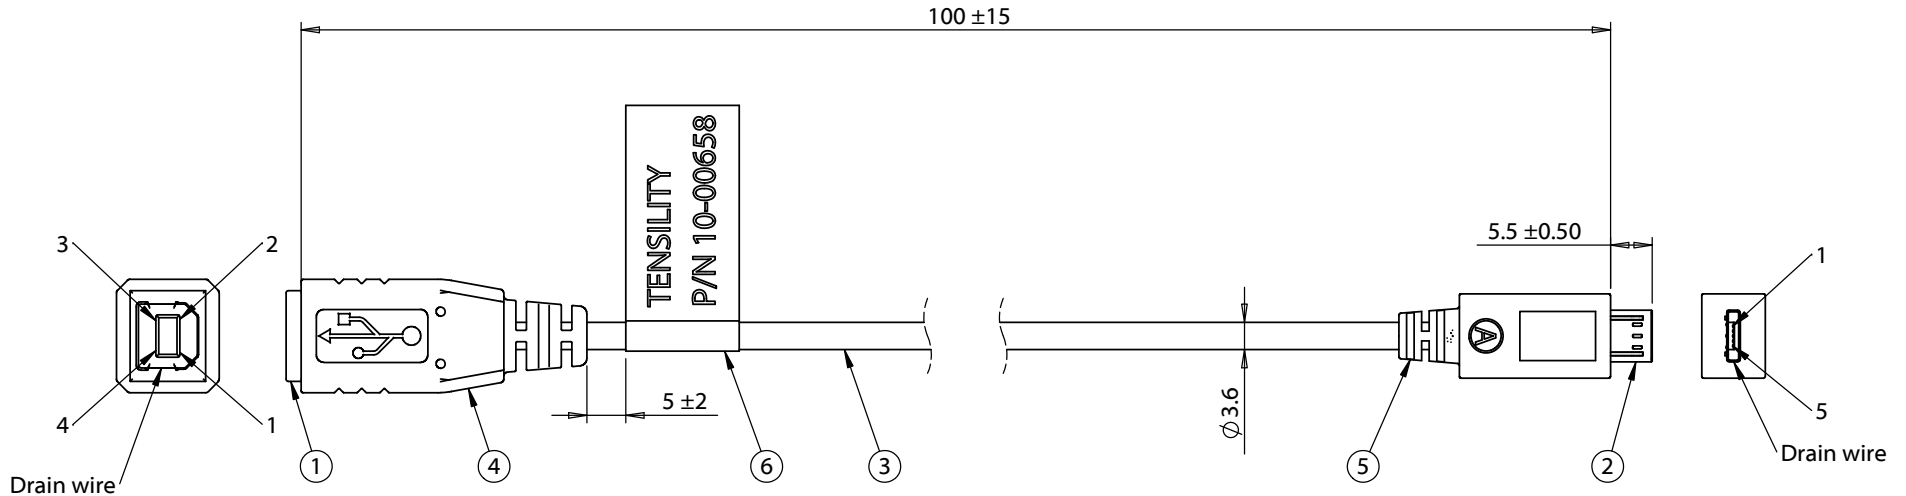

Notes:
 Cables individually tied and bundled in groups of 10
 Functionally equivalent components may be substituted

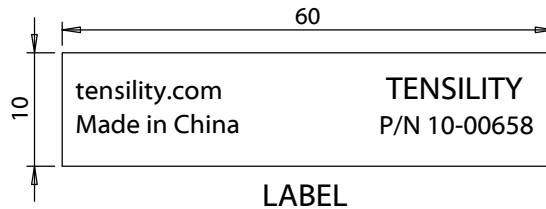

| Wiring diagram | | |
|----------------|----------------|----------|
| 50-00426 | Wire Color | 50-00428 |
| 1 | Red | 1 |
| 2 | White | 2 |
| 3 | Green | 3 |
| 4 | Black | 4 & 5 |
| Shell | Drain & Shield | Shell |

| | | | | | |
|-----------|-----------|-----------------------|--|--|---|
| Revision: | Date: | Description: | Prepared: | Notes: | <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> |
| A | 8/24/2011 | Initial release | | RoHS and REACH compliant | |
| A1 | 1/28/2014 | Corrected shield type | Verified: | Function test: no open, no short circuit, no intermittent | |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: Cable, 100 mm, USB B receptacle to USB micro A male, 28 AWG, 30-00088 wire | |
| Size: | | Part number: | | Scale: 1:1 | |
| A | | 10-00658 | | Sheet 1 of 1 | |