



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00430	Connector, USB AB mini receptacle	1	
2	50-00427	Connector, USB B plug, molding style	1	
3	30-00099	Wire, 4C, 1PR + 2C, 28 AWG, UL2725, 30V, 80C, 3.6mm, shielded, VW-1, PVC, 79A, USB 2.0, white	1	
4	24-00059	Overmold, PVC, white	1	
5	24-00021	Overmold, PVC, white	1	
6	Label 772	Adhesive, flag, 15x65 mm	1	

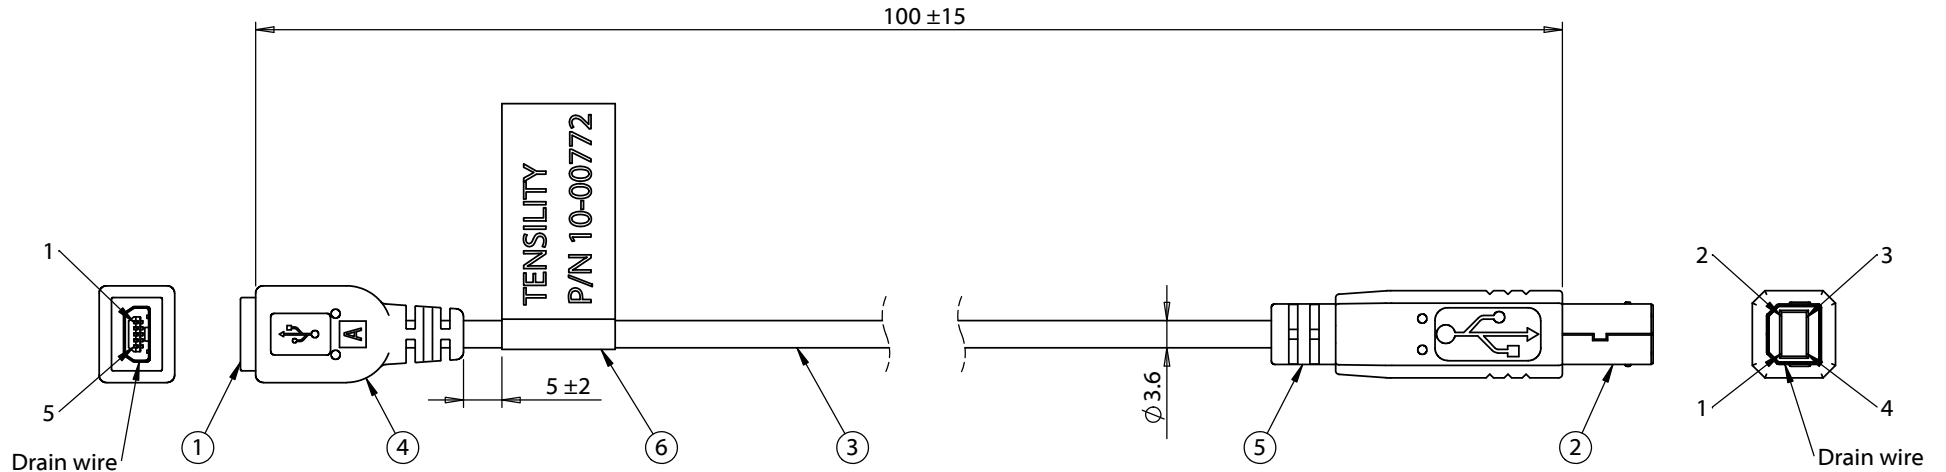

**Notes:**  
 Cables individually tied and bundled in groups of 10  
 Functionally equivalent components may be substituted

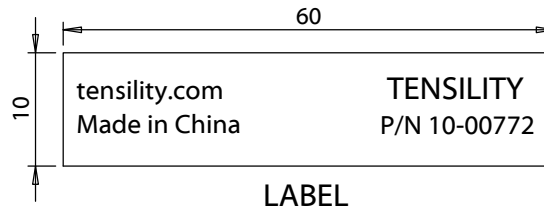

Wiring diagram		
50-00430	Wire Color	50-00427
1	Red	1
2	White	2
3	Green	3
5	Black	4
Shell	Drain & Shield	Shell

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118          fax 1.541.323.4202 web tensility.com</p>
A	9/21/2011	Initial release	Verified:	RoHS and REACH compliant	
A1	1/29/2014	Corrected shield type	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	
				Description: Cable, 100 mm, mini USB A receptacle to USB B male, 28 AWG, 30-00099 wire, white	
Size:		Part number:		Scale: 1:1	
A		10-00772		Sheet 1 of 1	