


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00056	Connector, dc plug, 3.5x1.35xL20mm, molding style, spring contacts, black insulator	1	
2	50-00057	Connector, dc jack, 3.5x1.35xL16.5 mm, molding style	1	
3	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1	
4	24-00002	Overmold, PVC, black	1	
5	24-00005	Overmold, PVC, black	1	

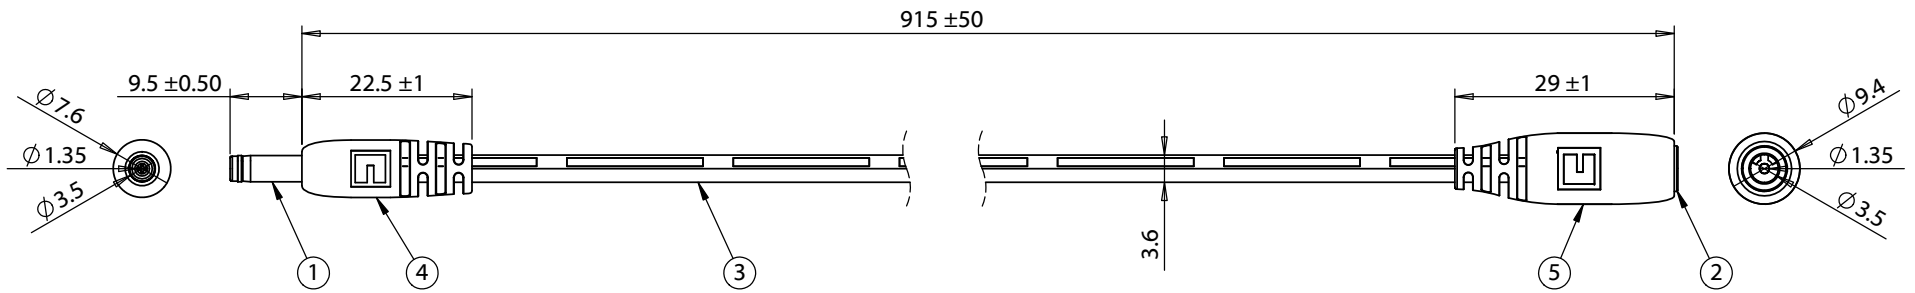

Wiring diagram		
50-00056	Wire Color	50-00057
Center	Black with stripe	Center
Sleeve	Black	Sleeve

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES
A	6/27/2012	Initial release		RoHS and REACH compliant
			VERIFIED:	Function test: no open, no reversed polarity, no short circuit, no INT
				4 A, 12 Vdc
				Functionally equivalent components may be used
				DESCRIPTION: Cable, 915 mm, 3.5x1.35x9.5 mm 50-00056 dc plug to 3.5x1.35 mm 50-00057 jack, 24 AWG, 30-00003 wire

TENSILITY

20802 Sockeye Place #130
Bend, OR 97701 USA
tel 541.323.3228 fax 541.323.4202
800 877.670.7118 www.tensility.com

SIZE: A PART NUMBER: 10-01079

SCALE: 1:1 WEIGHT:

SHEET 1 OF 1