


| ITEM NO. | PART NUMBER | DESCRIPTION   | QTY. | COMPONENT NOTES |
|----------|-------------|---|------|-----------------|
| 1        | TLY-1P      | NEMA 1-15P, polarized                                       | 1    | white overmold  |
| 2        | 30-00243    | 2C, 18 AWG, UL SPT-1, 300V, 105C, 5.55 mm, VW-1, PVC, white | 1    |                 |

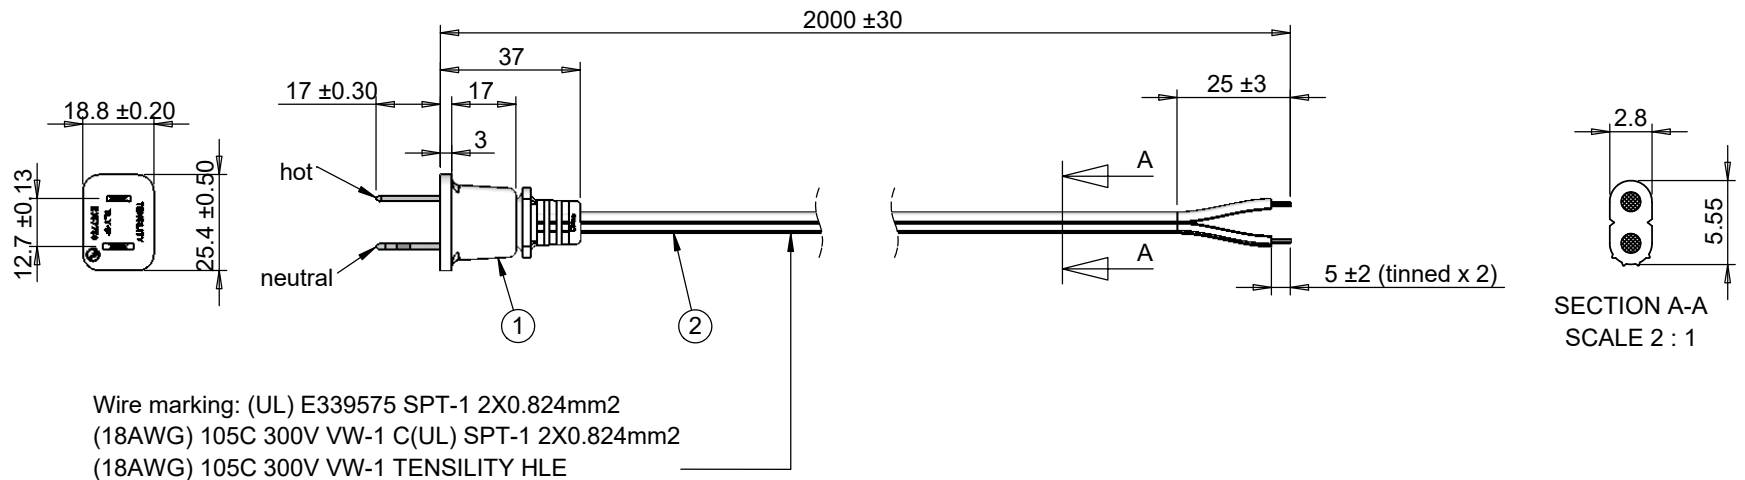

| Wiring Diagram |        |
|----------------|--------|
| TLY-1P         | wire   |
| hot            | smooth |
| neutral        | ribbed |

**Notes:**  
 Electrical requirements: 10 A at 125 Vac

|           |            |                 |  |   |   |
|-----------|------------|-----------------|--|---|---|
| Revision: | Date:      | Description:    | Prepared:  | Notes:<br>RoHS and REACH compliant  | <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118<br/>         fax 1.541.323.4202 web tensility.com</p> |
| A         | 12/17/2012 | Initial release | Verified:  |   |   |
|           |            |                 | Dimensions are in millimeters.<br>Tolerances:<br>X: ± 0.5 mm<br>X.X: ± 0.3 mm<br>X.XX: ± 0.05 mm | Description:<br>Ac cord, 2000 mm, U.S, NEMA 1-15P plug, TLY-1P to tinned, 18 AWG, SPT-1 wire, 30-00243, white | Size: A<br>Part number: 11-00025  |
|           |            |                 |  |   | Scale: 1:2  Sheet 1 of 1  |