
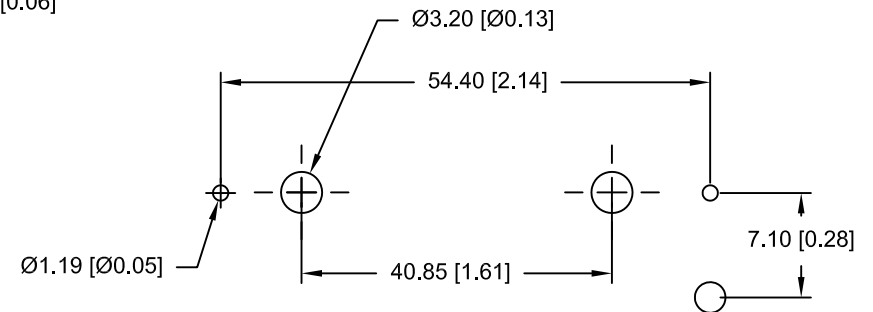
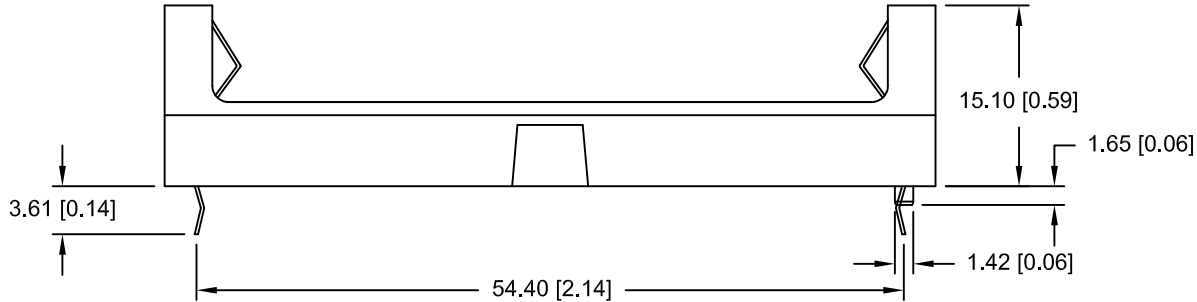
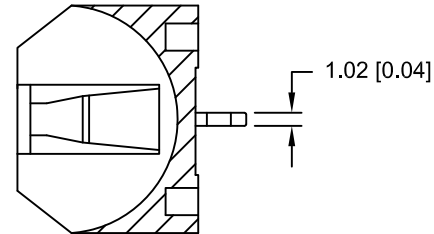



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
09/02/11	A	Added UL rating and temp.	T.B.	B.S.	
09/16/11	B	Updated notes	T.B.	B.S.	
10/17/14	C	Updated to ROHS 2 compliant	T.B.	B.S.	

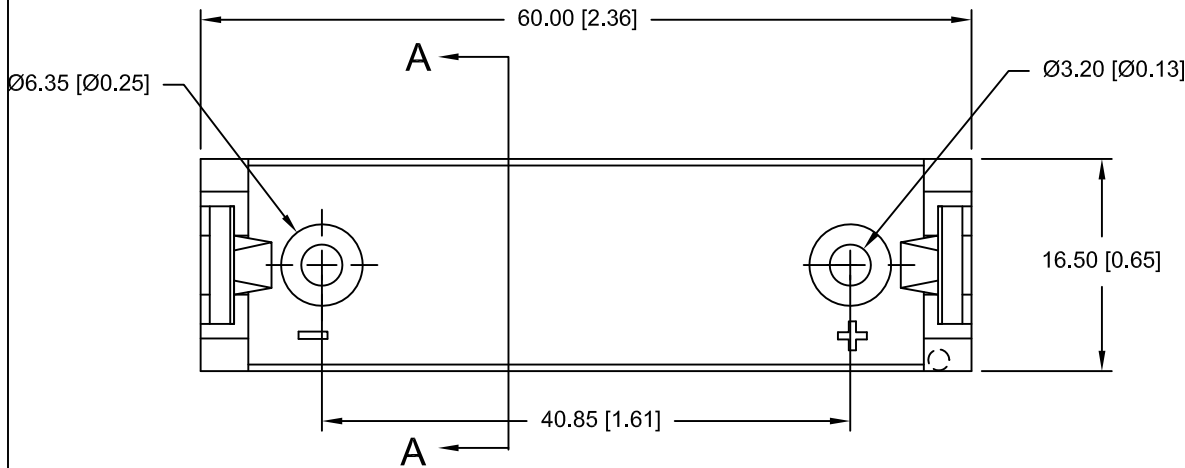

PC BOARD LAYOUT

NOTES:

Material: Self-extinguishing Thermoplastic Polyester, color black
Temperature Range: -40°C to +180°C
Contacts: 302 Stainless Steel Spring Temper, Nickel Plated
Flammability Rating: UL 94V-0
Dielectric Strength: 560 Volts/Mil. at 25°C for 5 Sec.
Resistance to Solvents: Xylene, ethyl, butyl, methyl & toluene
ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.02)		Scale 2=1	Drawn By T.S. Approved By T.B.
Fractional ±.8 (.03)		Title AA BATTERY HOLDER	
Angular ± 3°	Date 10/17/14	Drawing Number 6S-AA	