
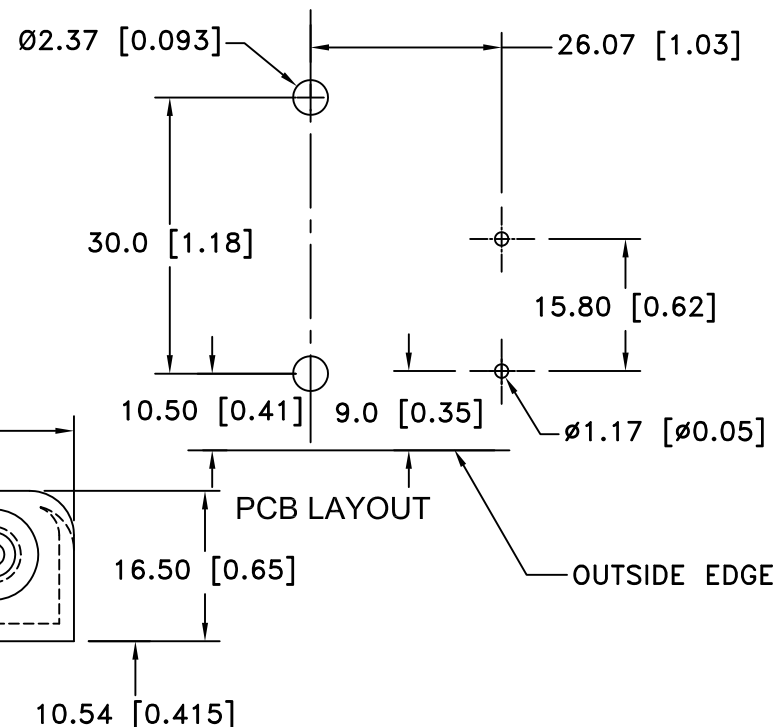
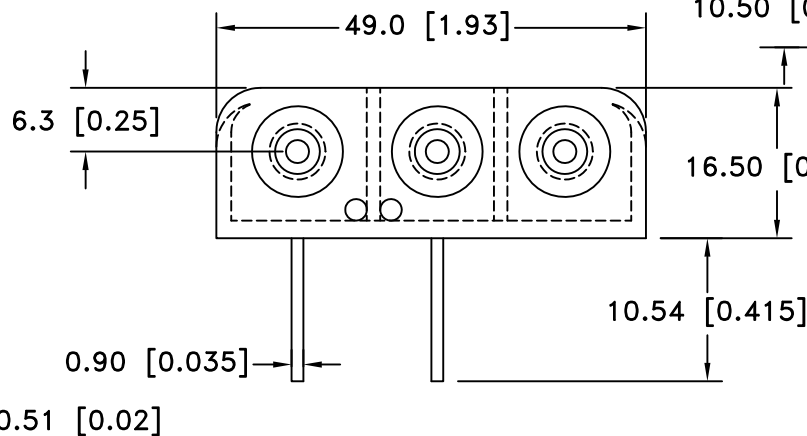
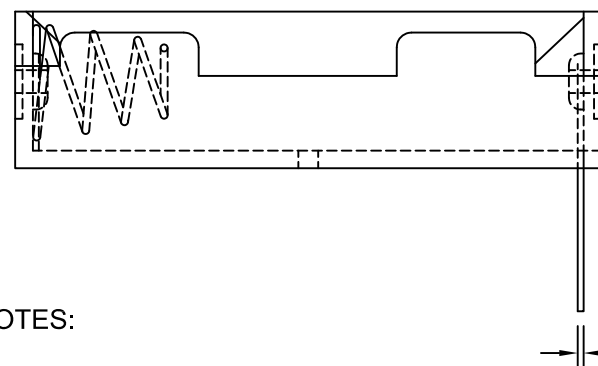


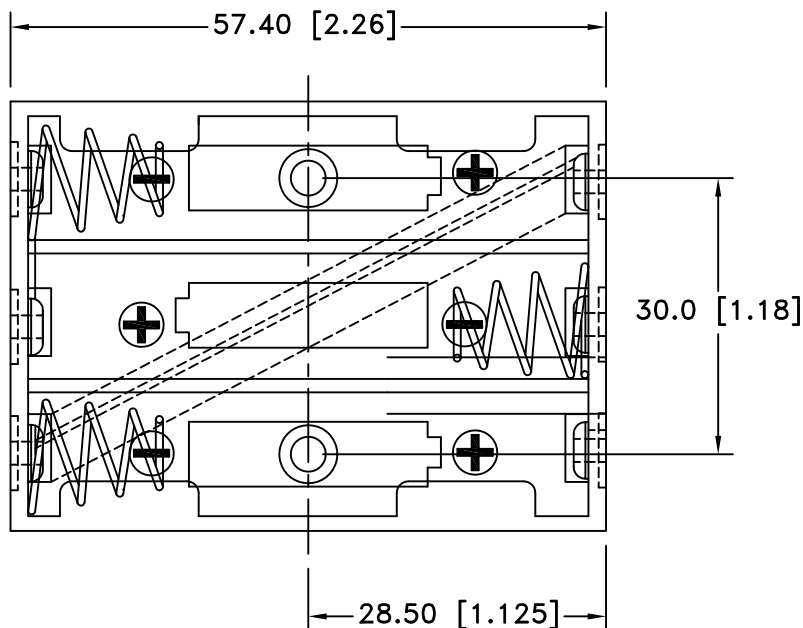

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
7/16/10	B	REDRAWN AND UPDATED MATERIAL NOTES	T.B.	B.S.	
12/21/12	C	Dim. 15.80 was 12.77	T.B.	B.S.	
10/17/14	D	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

NOTES:

1. MATERIAL:

HOUSING : POLYPROPYLENE
FLAMMABILITY RATING: UL94 HB, UL FILE NO. E216959
TEMPERATURE RANGE: -10°C TO +100°C
RIVETS: BRASS, NICKEL PLATED.
SPRING: SPRING STEEL, NICKEL PLATED.
CONTACT RESISTANCE: UNDER 50m Ω FOR ± CONTACTS PER
EIA-540J000
ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
			Approved By T.B.
Fractional ± .8 (.030)	Title THREE "AA" CELL HOLDER		
Angular ± 3°	Date 10/17/14	Drawing Number BC3AAPC	