

SUMMARY



Wires

| | |
|---------|---|
| Low | 0 |
| High | 0 |
| Coax | 0 |
| Triax | 0 |
| Quad | 0 |
| Fiber | 0 |
| Fluidic | 0 |

Download

[Request a quote](#)

[Catalog](#)

| | |
|------------------|-------------------------|
| Series | 1M |
| Termination type | No contacts / Accessory |
| IP rating | 50 |
| Cable Ø | 0.00 - 0.00 mm |
| Matching parts | xxx |

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|---|
| Shell Style/Model | BGF*: Blanking cap for plugs (arctic grip) |
| Keying | |
| Housing Material | Environment friendly aluminium (nickel plated, anthracite color) shell and nut, other pieces bronze/brass |
| Cable Fixing | ∅ 0 - 0 mm |
| Variant | |

Performance

| |
|---------------|
| Configuration |
| Insulator |
| Rated Current |


Others

| | |
|------------------------|-----------------------------|
| Humidity (max): | <=95% [at 60 deg C / 140 F] |
| Vibration: | 15 g [10 Hz - 2000 Hz] |
| Shock Resistance: | 100 g [6 ms] |
| Operating temperature: | -55° C/ +200° C |

Climatical Category: 15/200/21 (Al. shell)
Lighting strike EIA 364-75 10K amps - 6 times
EMI Shielding EIA 364-66A - 1Ghz-80 dB,3GHz-70 dB,6GHz- 58dB
IP Rating: 50

DRAWINGS

Draws

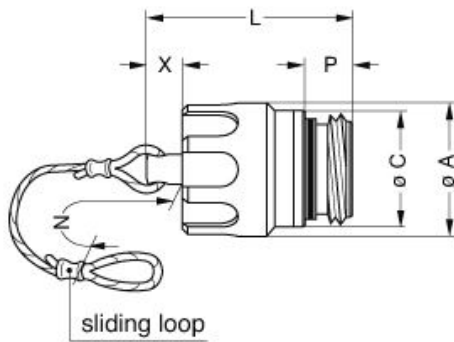

Dimensions

| | A | C | L | N | P | X |
|-----|------|------|------|------|------|------|
| mm. | 15.9 | 14.2 | 24.6 | 85 | 5.3 | 6 |
| in. | 0,63 | 0,56 | 0,97 | 3,35 | 0,21 | 0,24 |

RECOMMENDED BY LEMO

Tools

None

Cables