
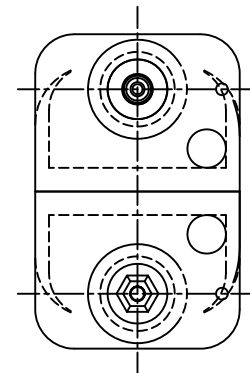
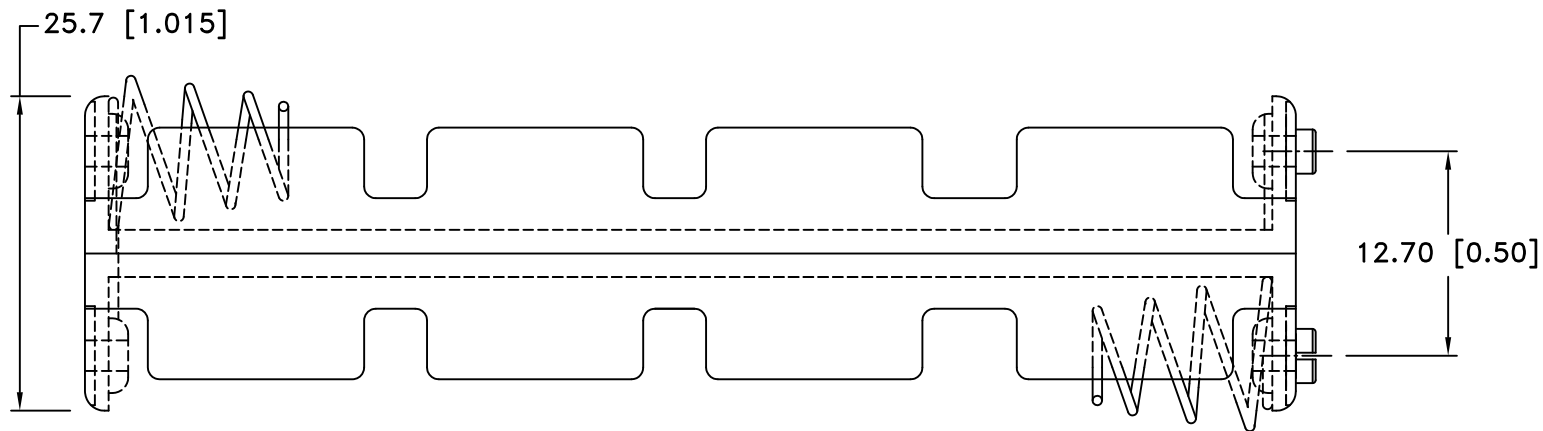



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/10/14	C	REDRAWN AND UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

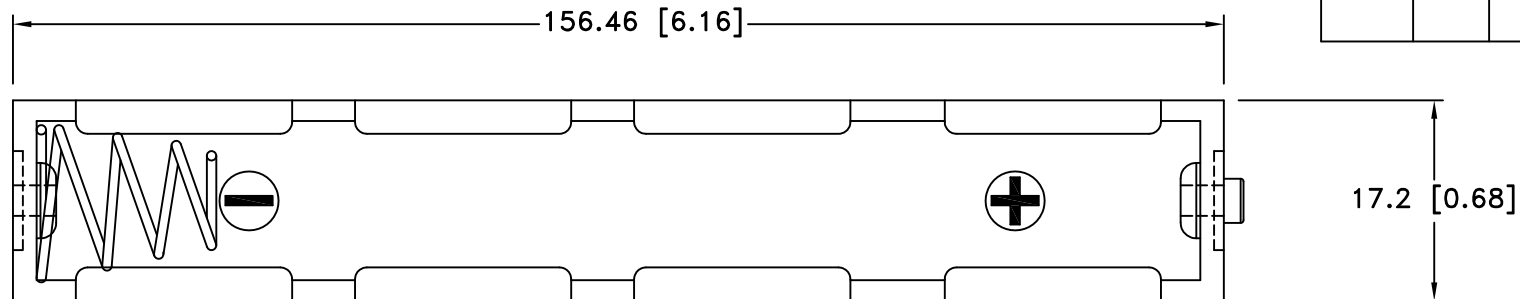

#### NOTES:

Plastic material - Polypropylene  
 Flammability Rating -UL94-HB, UL File NO. E216959  
 Temperature Range: -10°C to +100°C  
 Springs - Nickel Plated Spring Steel  
 Rivets - Brass, Nickel Plated  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER  
 EIA-540J000  
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title SIX "AA" CELL HOLDER WITH SNAP FASTENERS		
Angular ± 3°	Date 10/10/14	Drawing Number BH16AASF	