



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|-----------------------------|------|------|-----|
| 11/19/05 | A | ADDED "ROHS COMPLIANT" | T.B. | B.S. | |
| 10/14/06 | B | ADDED UL FILE NO. | T.B. | B.S. | |
| 11/21/14 | C | UPDATED TO ROHS 2 COMPLIANT | T.B. | B.S. | |
| | | | | | |
| | | | | | |

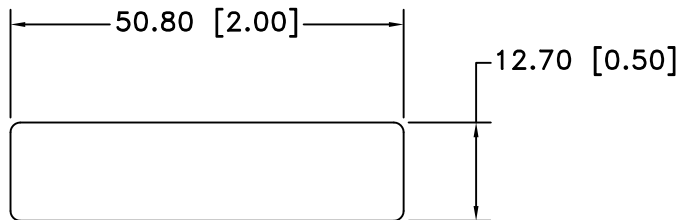

NOTES:

MATERIAL: PET, 0.25mm (0.010") THICK, WHITE
 UL FILE #E93687
 FLAMMABILITY RATING: VTM-2
 ROHS 2 COMPLIANT

| | | | |
|--------------------------------|---|-----------------------------|-----------------------------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| decimal ±.5 (.020) | | Scale | Drawn By B.S. Approved By T.B. |
| Fractional ± .8 (.030) | Title BATTERY INSULATOR | | |
| Angular ± 3° | Date 11/21/14 | Drawing Number BI-UM-1-2 | |