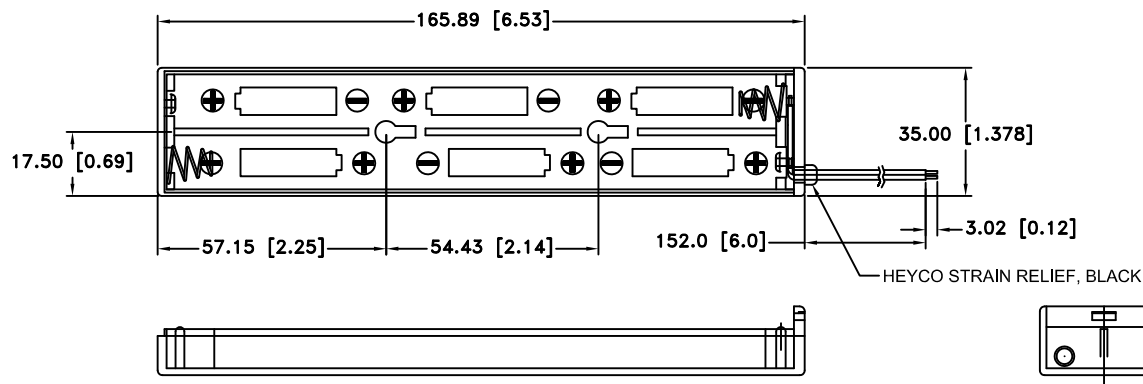

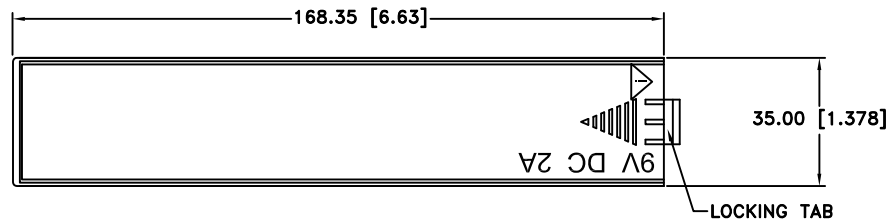


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
4/09/10	D	UPDATED NOTES ADDED DIM. 17.50 AND 57.15 ADDED HEYCO STRAIN RELIEF	T.B.	B.S.	
4/12/13	E	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

NOTES:

1. MATERIAL: POLYPROPYLENE, WHITE, UL94V-0, ULFILE NO. E140331
2. TEMPERATURE RANGE: -30°C TO +100°C
3. HDT 134°C PER ASTM D648, STEEL NICKEL PLATED HARDWARE AND SPRINGS
4. WIRES : 24 AWG, UL2468, CSA, TR64, WHITE

ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735			
decimal ±.5 (.020)			Scale	Drawn By B.S.
Fractional ± .8 (.030)				Approved By T.B.
Angular ± 3°	Title 6 "AA" BATTERIES CASE WITH COVER			
	Date 04/12/13	Drawing Number BK-6089		