

SUMMARY

Wires

Low	0
High	0
Coax	1
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series

Termination type

IP rating	50
Cable Ø	0.00 - 0.00 mm
Matching parts	xxx

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FTY*: Straight plug with two parallel receptacles
Keying	Circular (can rotate)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	∅0 - 0 mm
Variant	

Performance

Configuration	0.25 : 1 Coax (50 Ohm)
Insulator	T: PTFE
Rated Current	4 Amps

Specifications


Contact Type:	Coaxial 50 Ohm
Max. Matings:	5000
Test voltage:	1.1 kV (rms)

Others

Endurance (Shell):	5000 mating cycles
F ret (min):	100 N

DRAWINGS

Draws

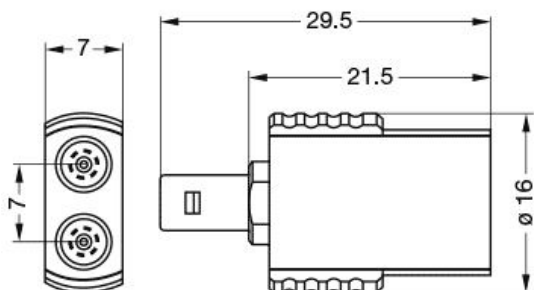

Dimensions

	A	L	Weight
mm.	7	29.5	12.5
in.	0,28	1,16	0,49

RECOMMENDED BY LEMO

Tools

None

Cables