

**Sales Outline Drawing**



Revision **A**

**Specifications:**

Impedance ( $\Omega$ )	$8 \pm 15\%$ at 2000 Hz at 1.0 V
Rated Power (W)	0.7
Max Power (W)	1.0
Resonance Freq Fo (Hz)	$480 \pm 20\%$ at 1.0V
Frequency Range (Hz)	$900 \pm 15\%$ at 1.0V in 1cc closed box Fo ~ 7000
Output S.P.L. (dB)	$91 \pm 3$ at 0.7w/0.1m 3.0kHz in 1cc closed box $73 \pm 3$ at 1w/1m 3.0kHz in 1cc closed box
Magnet	Nd-Fe-B
Frame Material	PPA
Operating / Storage Temp	-20 to 60°C/ -40 to 85°C
Weight (g)	1.6
Options	For other options contact factory

**Dimensions:  $\pm 0.2$**  (units: mm)

**ROHS Compliant**

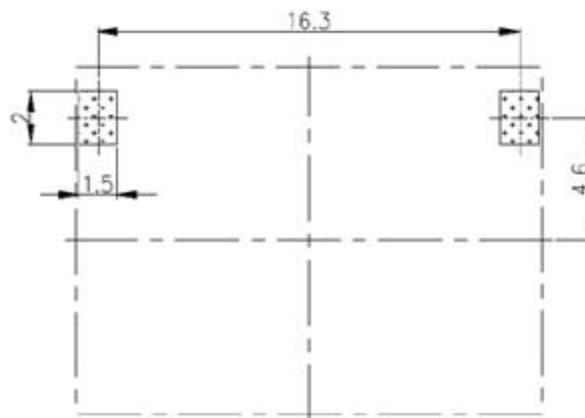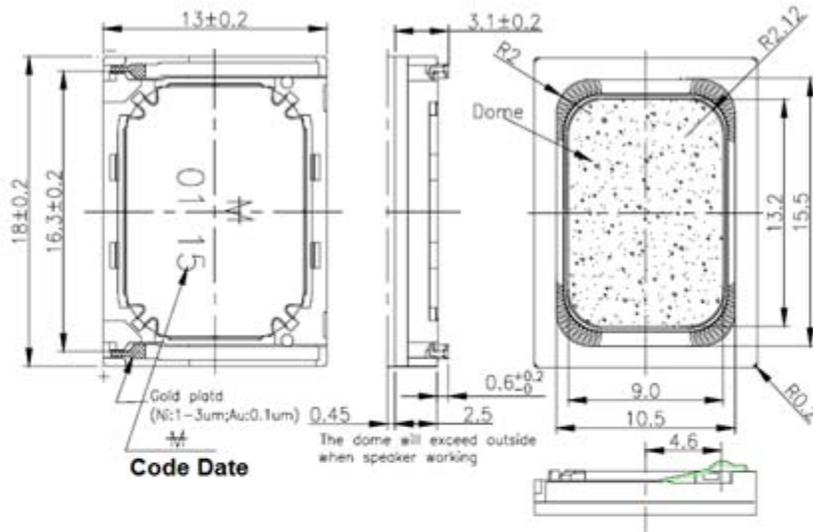

**Recommended PCB Layout**