

SUMMARY

Wires

| | |
|---------|---|
| Low | 0 |
| High | 0 |
| Coax | 1 |
| Triax | 0 |
| Quad | 0 |
| Fiber | 0 |
| Fluidic | 0 |



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series

| | |
|------------------|------------------------|
| Termination type | Coupler/adaptor/bridge |
| IP rating | 50 |
| Cable Ø | 0.00 - 0.00 mm |
| Matching parts | xxx |

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|---|
| Shell Style/Model | RMA*: Free coupler |
| Keying | Circular (can rotate) |
| Housing Material | Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces |
| Cable Fixing | Ø 0 - 0 mm |
| Variant | |

Performance

| | |
|---------------|------------------------|
| Configuration | 0.25 : 1 Coax (50 Ohm) |
| Insulator | T: PTFE |
| Rated Current | 4 Amps |

Specifications


| |
|---------------------------------|
| Contact Type: Coaxial 50 Ohm |
| Max. Matings: 500 |
| Contact Retention: 18 N |
| Contact Dia.: 0.7 mm (0.03in) |
| Vtest: 2100 V (AC), 3000 V (DC) |
| □ |
| Impedance: 50 Ohm |
| VSWR: 1.09 + 0.11 * f/GHz |

Others

Endurance (Shell): 5000 mating cycles
F ret (min): 100 N
IP Rating: 50

DRAWINGS

Draws

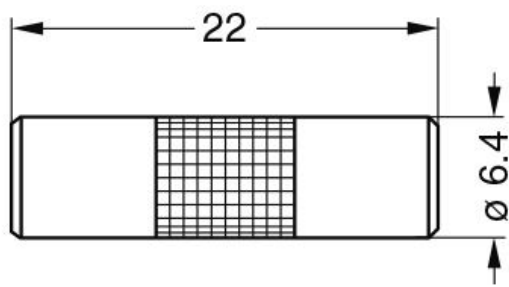

Dimensions

| | A | L | Weight |
|-----|------|------|--------|
| mm. | 6.5 | 22 | 2.7 |
| in. | 0,26 | 0,87 | 0,11 |

RECOMMENDED BY LEMO

Tools

Crimp Tool: DPC.91.701.V

Cables