

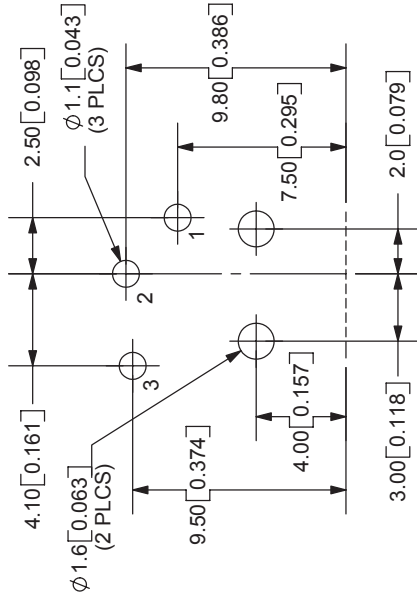


REV.	DESCRIPTION	DATE
A	NEW DRAWING	11/30/2005


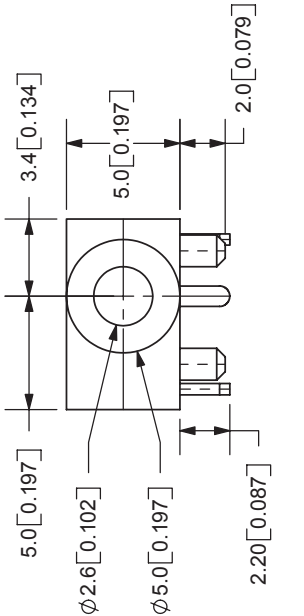


PCB LAYOUT
TOP VIEW

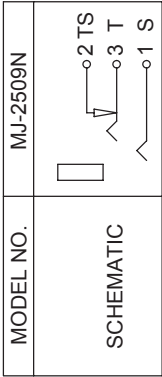

SPECIFICATIONS:
RATING: 12V DC @ 1A
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES
OPERATING TEMP: -20° ~ +60°C

TERMINAL 1	MATERIAL	PLATING
TERMINAL 2	PBS	Tin
TERMINAL 3	Brass	Tin
HOUSING	PBS	Tin
	PBT	

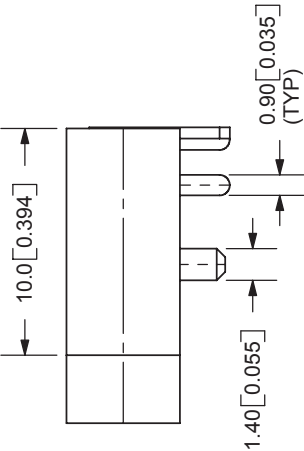

TOLERANCE:
X: ±0.5mm
X.X ±0.3mm
X.XX ±0.15mm



20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-643-4899
800-275-4899
Fax: 503-372-1266
Website: www.cui.com

TITLE: 2.5mm AUDIO JACK-MONO	REV: A
PART NO. MJ-2509N	UNITS: MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:
	SCALE: 3:1