
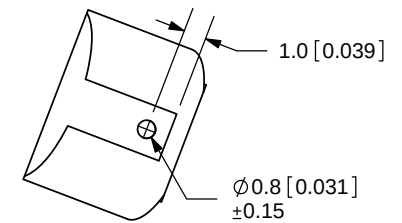
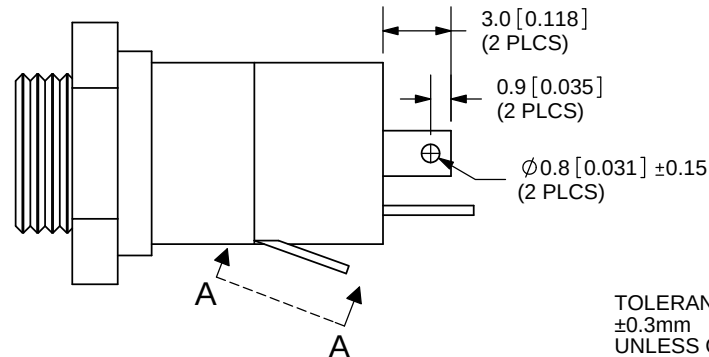
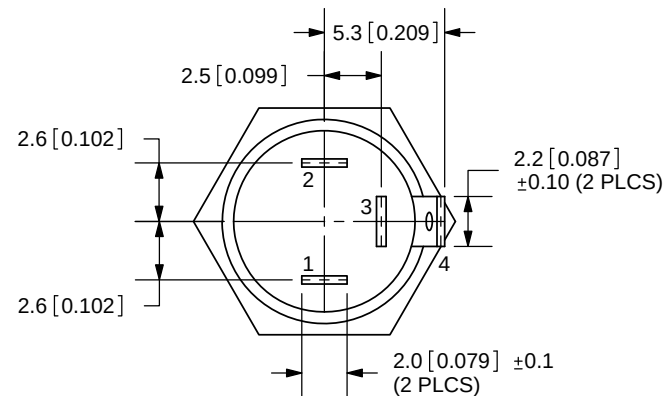
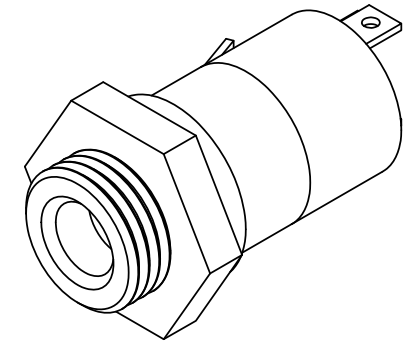


| REV. | DESCRIPTION           | DATE       |
|------|-----------------------|------------|
| A    | NEW DRAWING           | 9/8/2008   |
| B    | CORRECTED RATING TYPO | 01/09/2015 |

SECTION A-A  
SCALE 3 : 1

TOLERANCE:  
 $\pm 0.3\text{mm}$   
UNLESS OTHERWISE SPECIFIED

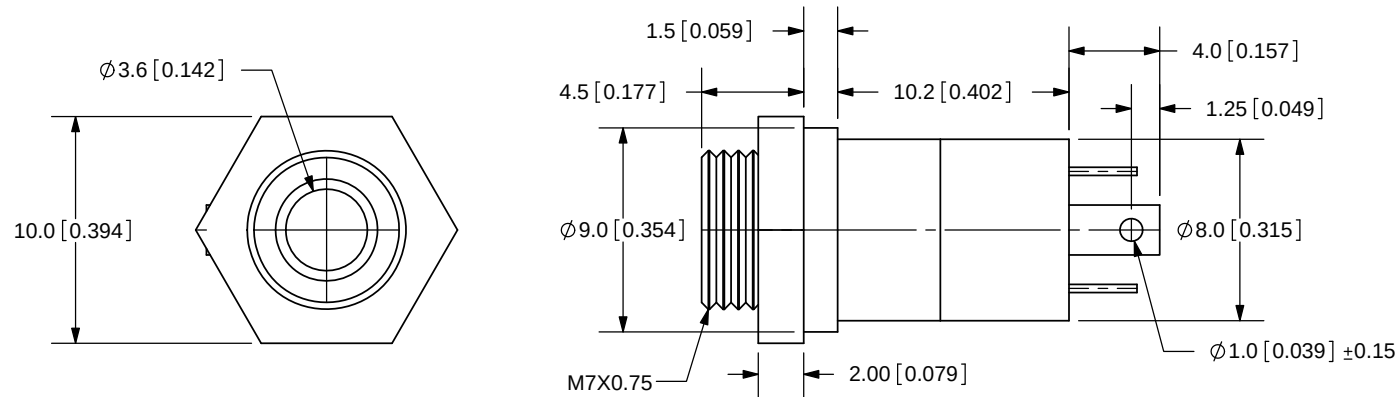

**SPECIFICATIONS:**  
 RATING: 16VDC @ 20mA~0.3A  
 CONTACT RESISTANCE: 50m OHMS MAX  
 INSULATION RESISTANCE: 100M OHMS MIN: 500V DC  
 VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE  
 LIFE: 5,000 CYCLES

| MODEL NO. | SJ5-43502PM |
|-----------|-------------|
| SCHMATIC  |             |

|            | MATERIAL     | PLATING |
|------------|--------------|---------|
| HEX NUT    | Steel        | Nickel  |
| TERMINAL 1 | Copper Alloy | Gold    |
| TERMINAL 2 | Copper Alloy | Nickel  |
| TERMINAL 3 | Copper Alloy | Nickel  |
| TERMINAL 4 | Copper Alloy | Nickel  |
| SHELL      | Brass        | Nickel  |
| HOUSING    | PBT          |         |



**CUI INC**

20050 SW 112th Ave.  
 Tualatin, OR 97062  
 Phone: 503-612-2300  
 800-275-4899  
 Fax: 503-612-2383  
 Website: www.cui.com

|           |                                            |              |             |
|-----------|--------------------------------------------|--------------|-------------|
| TITLE:    | 3.5mm Panel Mount Audio Jack - 4 Connector | REV:         | B           |
| PART NO.  | SJ5-43502PM                                | UNITS:       | MM [INCHES] |
| DRAWN BY: | RDS                                        | APPROVED BY: |             |
|           |                                            | SCALE:       | 3:1         |