


# Panasonic

ideas for life

**High capacity  
(Load current Max. 2A).  
Flat-Packaged type DIP  
(1Form A) 4-pin type.**

**PD PhotoMOS  
(AQY27O)**

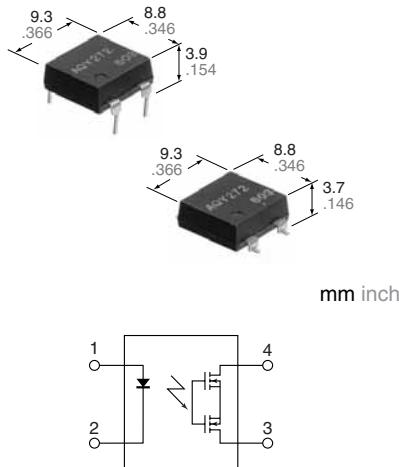

## FEATURES

**1. Flat-Packaged Type (W) 8.8× (D) 9.3× (H) 3.9mm (W) .346× (D) .366× (H) .154inch**

**2. High capacity**

Supports the various types of load control, from very small loads to a maximum 2A at the rated load voltage 60V (AQY272)

**3. High sensitivity**

- Low ON resistance

A maximum 2A load can be controlled with a 5mA input current. The ON resistance is low at 0.11Ω (AQY272)

## TYPICAL APPLICATIONS

- Measuring and Testing equipment
- IC Testers and Board Testers
- High speed inspection machines

**RoHS Directive compatibility information**  
<http://www.mew.co.jp/ac/e/environment/>

## TYPES

Type	Output rating*		Part No.				Packing quantity	
	Load voltage	Load current	Through hole terminal	Surface-mount terminal				
				Tape and reel packing style		Tube	Tape and reel	
AC/DC	60V	2.0A	AQY272	AQY272A	AQY272AX	AQY272AZ	1 tube contains 50 pcs. 1 batch contains 1,000 pcs.	1,000 pcs.
	100V	1.3A	AQY275	AQY275A	AQY275AX	AQY275AZ		
	200V	0.65A	AQY277	AQY277A	AQY277AX	AQY277AZ		
	400V	0.35A	AQY274	AQY274A	AQY274AX	AQY274AZ		

\* Indicate the peak AC and DC values.

Note: For space reasons, the SMD terminal shape indicator "A" and the package style indicator "X" or "Z" are not marked on the relay.

## RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

	Item	Symbol	AQY272(A)	AQY275(A)	AQY277(A)	AQY274(A)	Remarks
Input	LED forward current	I <sub>F</sub>		50 mA			
	LED reverse voltage	V <sub>R</sub>		5 V			
	Peak forward current	I <sub>FP</sub>		1 A			f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>		75 mW			
Output	Load voltage (peak AC)	V <sub>L</sub>	60 V	100 V	200 V	400 V	
	Continuous load current (Peak AC)	I <sub>L</sub>	2.0 A	1.3 A	0.65 A	0.35 A	
	Peak load current	I <sub>peak</sub>	6.0 A	4.0 A	2.0 A	1.0 A	100ms (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>		700 mW			
Total power dissipation		P <sub>T</sub>		750 mW			
I/O isolation voltage		V <sub>iso</sub>		2,500 V AC			
Temperature limits	Operating	T <sub>opr</sub>		−40°C to +85°C −40°F to +185°F			Non-condensing at low temperatures
	Storage	T <sub>stg</sub>		−40°C to +100°C −40°F to +212°F			

# PD PhotoMOS (AQY27O)


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQY272(A)	AQY275(A)	AQY277(A)	AQY274(A)	Condition		
Input	LED operate current	$I_{Fon}$	1.0 mA		3.0 mA		$I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$		
			0.4 mA		0.9 mA				
Output	LED turn off current	$I_{Foff}$	1.25 V (1.16 V at $I_F = 10 \text{ mA}$ )		1.5 V		$I_F = 50 \text{ mA}$		
			0.11 Ω		0.23 Ω				
Transfer characteristics	On resistance	$R_{on}$	0.18 Ω		0.34 Ω		$I_F = 10 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time		
			0.7 Ω		1.1 Ω				
Transfer characteristics	Off state leakage current	$I_{Leak}$	10 μA				$I_F = 0 \text{ mA}$ $V_L = \text{Max.}$		
			2.46 ms						
Transfer characteristics	Turn on time*	$T_{on}$	2.40 ms				$I_F = 10 \text{ mA}$ $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$		
			5.0 ms						
Transfer characteristics	Turn off time*	$T_{off}$	5.64 ms		2.57 ms		$I_F = 5 \text{ mA}$ $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$		
			10.0 ms						
Transfer characteristics	I/O capacitance	$C_{iso}$	0.22 ms		0.21 ms		$I_F = 5 \text{ mA or } 10 \text{ mA}$ $I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$		
			0.10 ms						
Transfer characteristics	Initial I/O isolation resistance	$R_{iso}$	0.08 ms				500 V DC		
			3.0 ms						
Transfer characteristics	Maximum operating speed	$f$	0.8 pF				$f = 1 \text{ MHz}$ $V_B = 0 \text{ V}$		
			1.5 pF						
Transfer characteristics		$I_F$	1,000 MΩ				$I_F = 10 \text{ mA}$ Duty factor = 50% $I_L = \text{Max.}$ , $V_L = \text{Max.}$		
			0.5 cps						

Note: Recommendable LED forward current  $I_F = 5$  to 10 mA.

For type of connection.

\*Turn on/Turn off time

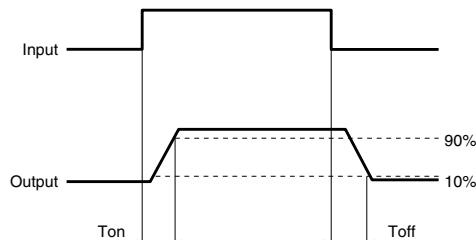


- For Dimensions.
- For Schematic and Wiring Diagrams.
- For Cautions for Use.

## REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature:  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$   
 $-40^\circ\text{F}$  to  $+185^\circ\text{F}$

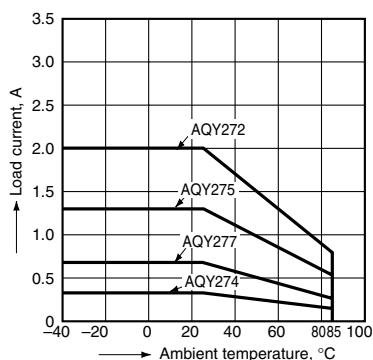


2.-1) On resistance vs. ambient temperature characteristics

LED current: 10 mA;  
Continuous load current: 2.0 A (DC) (AQY272),  
1.3 A (DC) (AQY275)

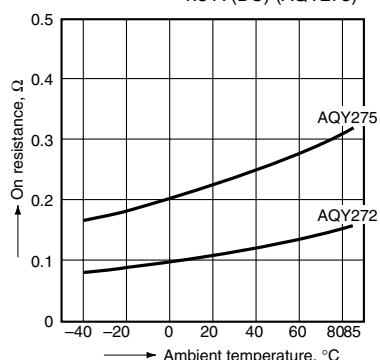

2.-2) On resistance vs. ambient temperature characteristics


LED current: 10 mA;  
Continuous load current: 0.65 A (DC) (AQY277),  
0.35 A (DC) (AQY274)

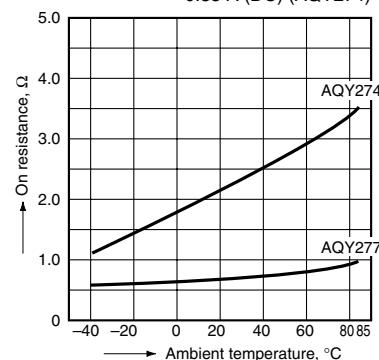

# PD PhotoMOS (AQY27O)


### 3. Turn on time vs. ambient temperature characteristics

LED current: 10 mA; Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

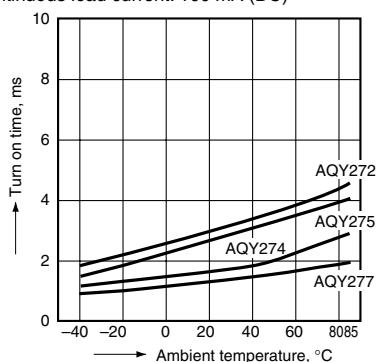


### 4. Turn off time vs. ambient temperature characteristics

LED current: 10 mA; Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

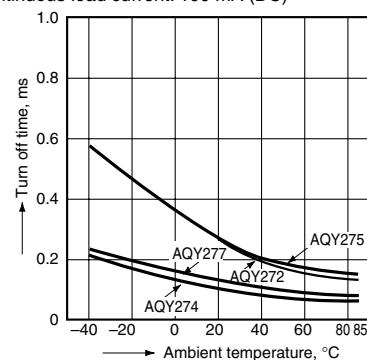


### 5. LED operate vs. ambient temperature characteristics

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

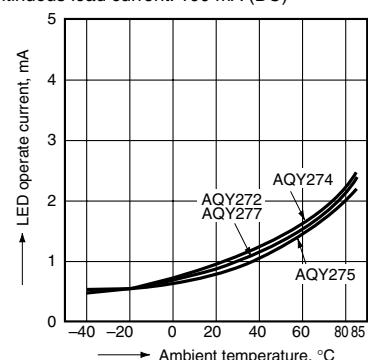


### 6. LED turn off current vs. ambient temperature characteristics

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

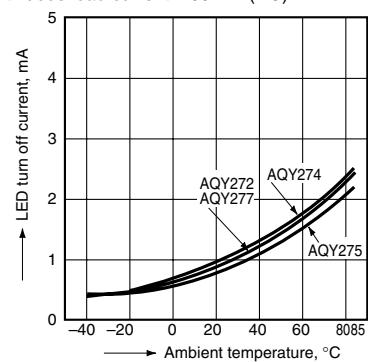


### 7. LED dropout voltage vs. ambient temperature characteristics

Sample: all types; LED current: 5 to 50 mA

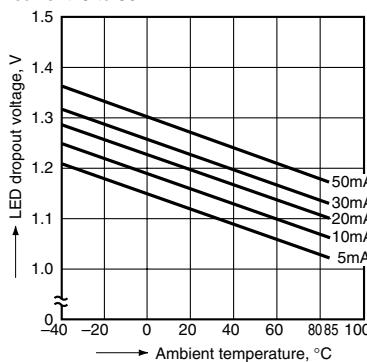


### 8. Current vs. voltage characteristics of output at MOS portion

Ambient temperature: 25°C 77°F




### 9.-1 Off state leakage current vs. load voltage characteristics

Ambient temperature: 25°C 77°F

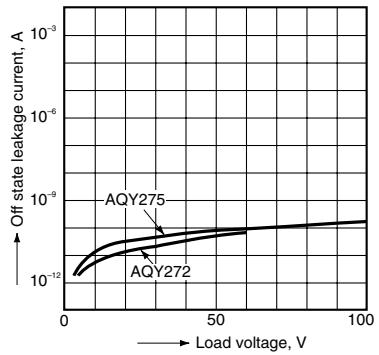


### 9.-2 Off state leakage current vs. load voltage characteristics

Ambient temperature: 25°C 77°F

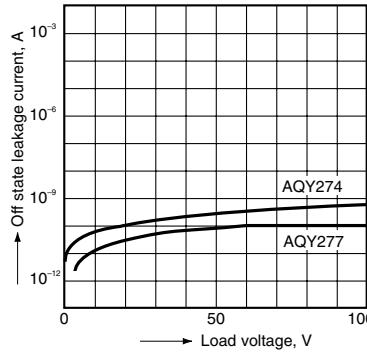


### 10. Turn on time vs. LED forward current characteristics

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC); Ambient temperature: 25°C 77°F

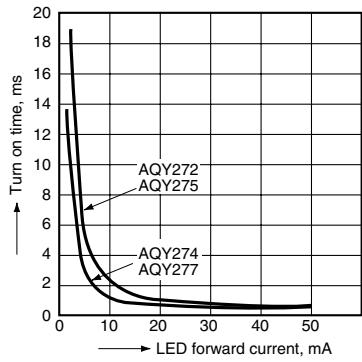


### 11. Turn off time vs. LED forward current characteristics

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC); Ambient temperature: 25°C 77°F

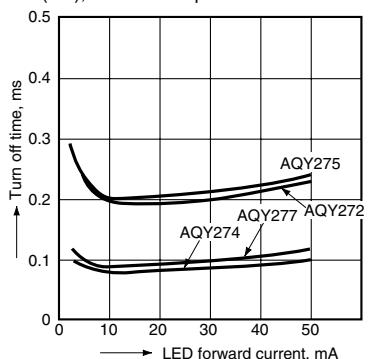


### 12.-1 Turn on time vs. load voltage characteristics

LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

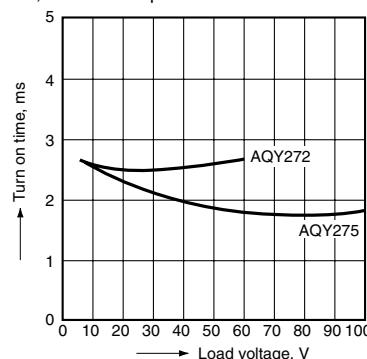

### 12.-2 Turn on time vs. load voltage characteristics


LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

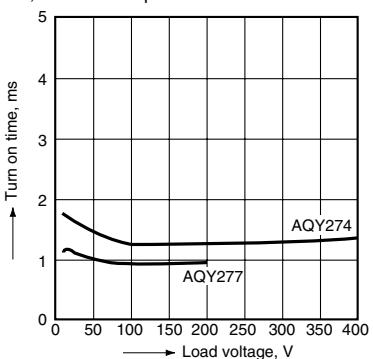

# PD PhotoMOS (AQY27O)


## 13.-(1) Turn on time vs. load current characteristics

LED current: 10 mA; Load voltage: 10 V (DC); Ambient temperature: 25°C 77°F

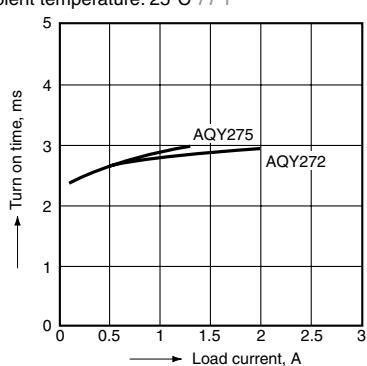


## 13.- (2) Turn on time vs. load current characteristics

LED current: 10 mA; Load voltage: 10 V (DC); Ambient temperature: 25°C 77°F

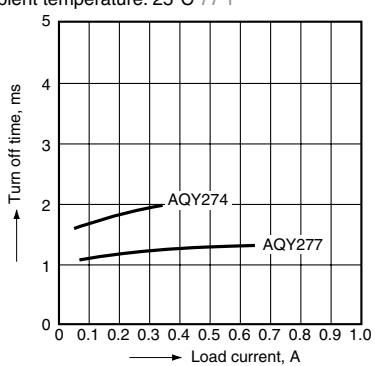


## 14.- (1) Turn off time vs. load voltage characteristics

LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

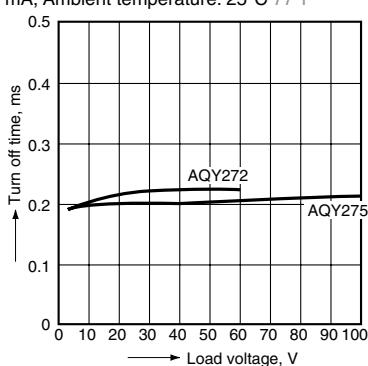


## 14.- (2) Turn off time vs. load voltage characteristics

LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

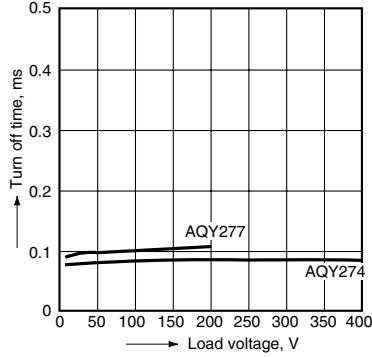


## 15.- (1) Turn off time vs. load current characteristics

LED current: 10 mA; Load voltage 10 V (DC); Ambient temperature: 25°C 77°F

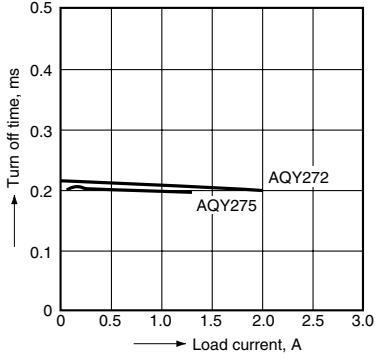


## 15.- (2) Turn off time vs. load current characteristics

LED current: 10 mA; Load voltage 10 V (DC); Ambient temperature: 25°C 77°F

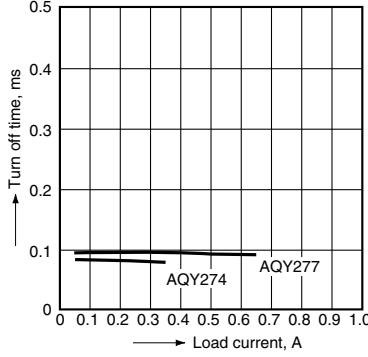

## 16. Maximum operating frequency vs. load voltage/current characteristics

LED current: 10 mA; Ambient temperature: 25°C 77°F

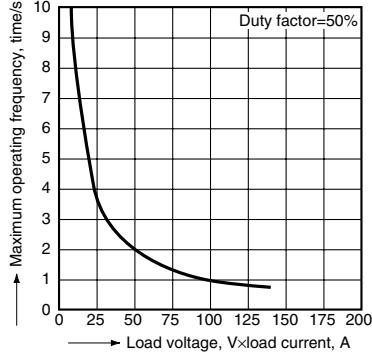

## 17. Output capacitance vs. applied voltage characteristics

Frequency: 1 MHz; Ambient temperature: 25°C 77°F

