

オプションハーネス

■オプションハーネス適応表

シリーズ	モデル	入力ハーネス	出力ハーネス	信号ハーネス
CME	CME150	HA-2-IN HA-7-IN	HA-4-OU	—
	CME240P	HA-2-IN HA-7-IN	HA-5-OU	—
CME-A	CME30A	LN:HA-11-IN FG:HA-9-IN	HA-3-OU	—
	CME60A			—
	CME100A	LN:HA-8-IN FG:HA-9-IN	HA-19-OU	—
	CME150A	HA-10-IN	HA-20-OU	—
	CME200A			HA-7-C
	CME350A	—	—	HA-8-C
	CME500A	HA-10-IN	—	—
	CME600A	HA-10-IN	—	CN61:HA-10-C CN62:HA-11-C
CME-A/EF	CME500A/EF	HA-12-IN	—	—
	CME600A/EF			HA-10-C
CME-P	CME350P-1000	HA-2-IN HA-7-IN	+ :HA-22-OU, - :HA-23-OU	HA-12-C
CUT-J	CUT35J	HA-2-IN	HA-21-OU	—
	CUT75J	HA-7-IN	HA-9-OU	—
EVS	EVS300/R	—	—	HA-1-C
	EVS600/R	—	—	HA-6-C
EZA	EZA2500 EZA11K	—	—	EZA-CNHA-1
GXE	GXE600	—	—	HA-9-C
HWS-A	HWS50A/R HWS80A/R HWS100A/R HWS150A/R	—	—	HA-1-C
HWS	HWS300 HWS600	—	—	HWS-HA-02 HWS-HA-KIT01 (*) (*ハウジング, 接触子)
	HWS1000 HWS1500 HWS1800T	—	—	HWS-HA-01 HWS-HA-02 HWS-HA-KIT01 (*) (*ハウジング, 接触子)
HWS-P	HWS300P HWS600P	—	—	HA-3-C
HWS-L HWS-L/BAT	HWS600L HWS600L/BAT HWS1000L HWS1000L/BAT	—	—	HA-4-C HA-5-C
RWS-B	RWS300B/R	—	—	HA-2-C
	RWS600B RWS1000B RWS1500B	—	—	HA-6-C
	VS10C	HA-1-IN HA-6-IN	HA-1-OU	—
VS-C	VS15C	HA-1-IN HA-6-IN	HA-2-OU	—
	VS30C	HA-2-IN HA-7-IN	HA-3-OU	—

オプションハーネス

■オプションハーネス適応表

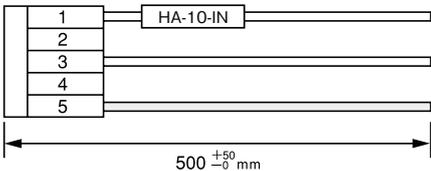
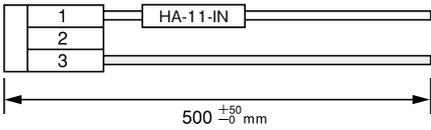
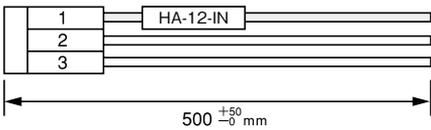
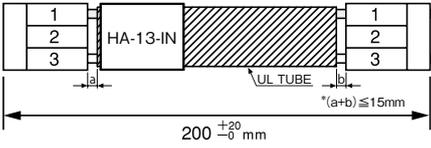
シリーズ	モデル	入力ハーネス	出力ハーネス	信号ハーネス
VS-E	VS50E	HA-2-IN HA-7-IN	HA-3-OU	—
	VS75E	HA-2-IN HA-7-IN	HA-4-OU	—
	VS100E	HA-2-IN HA-7-IN	HA-5-OU	—
	VS150E	HA-2-IN HA-7-IN	+ : HA-6-OU, - : HA-7-OU	—
ZBM	ZBM20	HA-4-OU		HA-13-C
ZBM-AC	ZBM-AC162	HA-13-IN	—	HA-14-C
ZWD-PAF	ZWD100PAF/J ZWD150PAF/J	HA-2-IN HA-7-IN	HA-14-OU	—
	ZWD225PAF/J	HA-2-IN HA-7-IN	HA-15-OU	—
ZWP	ZWP350-1000	HA-2-IN HA-7-IN	+ : HA-22-OU, - : HA-23-OU	HA-12-C
ZWQ	ZWQ80	HA-2-IN HA-7-IN	V1,V2,V3:HA-9-OU V4:HA-10-OU	—
	ZWQ130	HA-2-IN HA-7-IN	V1:HA-11-OU V2,V3:HA-12-OU V4:HA-13-OU	—
ZWS-B	ZWS10B ZWS15B	HA-2-IN HA-7-IN	HA-16-OU	—
	ZWS30B ZWS50B	HA-2-IN HA-7-IN	HA-3-OU	—
	ZWS75B	HA-2-IN HA-7-IN	HA-4-OU	—
	ZWS100B	HA-2-IN HA-7-IN	HA-5-OU	—
	ZWS150B	HA-2-IN HA-7-IN	+ : HA-6-OU, - : HA-7-OU	—
ZWS-BAF	ZWS50BAF	HA-2-IN HA-7-IN	HA-3-OU	—
	ZWS75BAF	HA-2-IN HA-7-IN	HA-4-OU	—
	ZWS100BAF	HA-2-IN HA-7-IN	HA-5-OU	HA-1-C (* /R製品のみ適用)
	ZWS150BAF	HA-2-IN HA-7-IN	+ : HA-6-OU, - : HA-7-OU	
	ZWS300BAF	HA-2-IN HA-7-IN	HA-5-OU	
ZWS-BP	ZWS150BP	HA-2-IN HA-7-IN	HA-4-OU	HA-1-C (* /R製品のみ適用)
	ZWS240BP	HA-2-IN HA-7-IN	HA-5-OU	
ZWS-RC	ZWS240RC	—	HA-5-OU	—
	ZWS240RC/R	—	HA-5-OU	HA-1-C
	ZWS300RC	HA-2-IN HA-7-IN	HA-5-OU	—
	ZWS300RC/R			HA-1-C
	ZWS300RC/BM	HA-2-IN HA-7-IN		—
	ZWS300RC/RBM	CN2 : HA-13-IN		HA-1-C

オプションハーネス

■入力用 ハーネス

<p>品名 HA-1-IN</p> <p>ハウジング XHP-7</p> <p>接触子 SXH-001T-P0.6 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1007</td> <td>22</td> <td>黒</td> </tr> <tr> <td>2, 3</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>4</td> <td>UL1007</td> <td>22</td> <td>白</td> </tr> <tr> <td>5, 6</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>7</td> <td>UL1007</td> <td>22</td> <td>緑</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	22	黒	2, 3	—	—	—	4	UL1007	22	白	5, 6	—	—	—	7	UL1007	22	緑
コネクタ ピン 番号	使用線材	AWG	色																							
1	UL1007	22	黒																							
2, 3	—	—	—																							
4	UL1007	22	白																							
5, 6	—	—	—																							
7	UL1007	22	緑																							
<p>品名 HA-2-IN</p> <p>ハウジング VHR-5N</p> <p>接触子 SVH-21T-P1.1 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>2</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>3</td> <td>UL1015</td> <td>18</td> <td>白</td> </tr> <tr> <td>4</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>5</td> <td>UL1015</td> <td>18</td> <td>緑</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1015	18	黒	2	—	—	—	3	UL1015	18	白	4	—	—	—	5	UL1015	18	緑
コネクタ ピン 番号	使用線材	AWG	色																							
1	UL1015	18	黒																							
2	—	—	—																							
3	UL1015	18	白																							
4	—	—	—																							
5	UL1015	18	緑																							
<p>品名 HA-6-IN</p> <p>ハウジング XHP-7</p> <p>接触子 SXH-001T-P0.6 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1007</td> <td>22</td> <td>黒</td> </tr> <tr> <td>2, 3</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>4</td> <td>UL1007</td> <td>22</td> <td>白</td> </tr> <tr> <td>5, 6</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>7</td> <td>UL1007</td> <td>22</td> <td>緑/黄</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	22	黒	2, 3	—	—	—	4	UL1007	22	白	5, 6	—	—	—	7	UL1007	22	緑/黄
コネクタ ピン 番号	使用線材	AWG	色																							
1	UL1007	22	黒																							
2, 3	—	—	—																							
4	UL1007	22	白																							
5, 6	—	—	—																							
7	UL1007	22	緑/黄																							
<p>品名 HA-7-IN</p> <p>ハウジング VHR-5N</p> <p>接触子 SVH-21T-P1.1 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>2</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>3</td> <td>UL1015</td> <td>18</td> <td>白</td> </tr> <tr> <td>4</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>5</td> <td>UL1015</td> <td>18</td> <td>緑/黄</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1015	18	黒	2	—	—	—	3	UL1015	18	白	4	—	—	—	5	UL1015	18	緑/黄
コネクタ ピン 番号	使用線材	AWG	色																							
1	UL1015	18	黒																							
2	—	—	—																							
3	UL1015	18	白																							
4	—	—	—																							
5	UL1015	18	緑/黄																							
<p>品名 HA-8-IN</p> <p>ハウジング VHR-3N</p> <p>接触子 SVH-21T-P1.1 (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>2</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>3</td> <td>UL1015</td> <td>18</td> <td>白</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1015	18	黒	2	—	—	—	3	UL1015	18	白								
コネクタ ピン 番号	使用線材	AWG	色																							
1	UL1015	18	黒																							
2	—	—	—																							
3	UL1015	18	白																							
<p>品名 HA-9-IN</p> <p>ハウジング —</p> <p>接触子 STO-21T-250N (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1015</td> <td>18</td> <td>緑/黄</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1015	18	緑/黄																
コネクタ ピン 番号	使用線材	AWG	色																							
1	UL1015	18	緑/黄																							

■入力用 ハーネス

<p>品名 ハウジング 接触子</p>	<p>HA-10-IN VHR-5N SVH-21T-P1.1 (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1015</td> <td>18</td> <td>緑/黄</td> </tr> <tr> <td>2</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>3</td> <td>UL1015</td> <td>18</td> <td>白</td> </tr> <tr> <td>4</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>5</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1015	18	緑/黄	2	—	—	—	3	UL1015	18	白	4	—	—	—	5	UL1015	18	黒
コネクタ ピン 番号	使用線材	AWG	色																								
1	UL1015	18	緑/黄																								
2	—	—	—																								
3	UL1015	18	白																								
4	—	—	—																								
5	UL1015	18	黒																								
<p>品名 ハウジング 接触子</p>	<p>HA-11-IN VHR-3N SVH-21T-P1.1 (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1015</td> <td>18</td> <td>白</td> </tr> <tr> <td>2</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>3</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1015	18	白	2	—	—	—	3	UL1015	18	黒								
コネクタ ピン 番号	使用線材	AWG	色																								
1	UL1015	18	白																								
2	—	—	—																								
3	UL1015	18	黒																								
<p>品名 ハウジング 接触子</p>	<p>HA-12-IN 350766-1 (TE Conectivity) 350536-1 (TE Conectivity)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1430</td> <td>16</td> <td>黒</td> </tr> <tr> <td>2</td> <td>UL1430</td> <td>16</td> <td>白</td> </tr> <tr> <td>3</td> <td>UL1015</td> <td>18</td> <td>緑/黄</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1430	16	黒	2	UL1430	16	白	3	UL1015	18	緑/黄								
コネクタ ピン 番号	使用線材	AWG	色																								
1	UL1430	16	黒																								
2	UL1430	16	白																								
3	UL1015	18	緑/黄																								
<p>品名 ハウジング 接触子</p>	<p>HA-13-IN VHR-3N (日本圧着端子製造) SVH-21T-P1.1 (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>2</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>3</td> <td>UL1015</td> <td>18</td> <td>白</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1015	18	黒	2	—	—	—	3	UL1015	18	白								
コネクタ ピン 番号	使用線材	AWG	色																								
1	UL1015	18	黒																								
2	—	—	—																								
3	UL1015	18	白																								

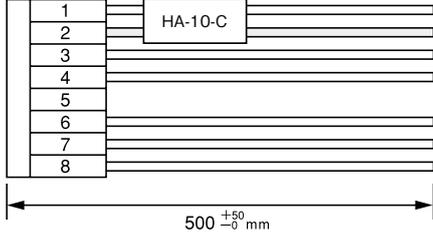
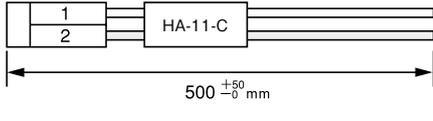
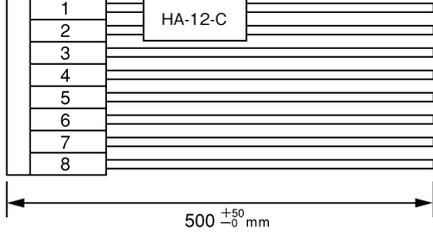
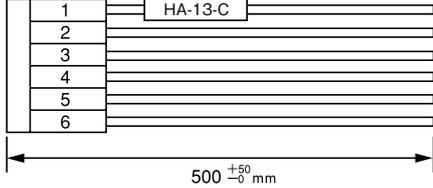
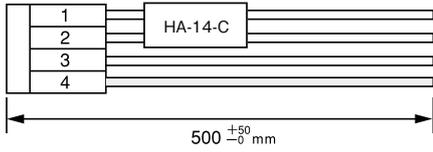
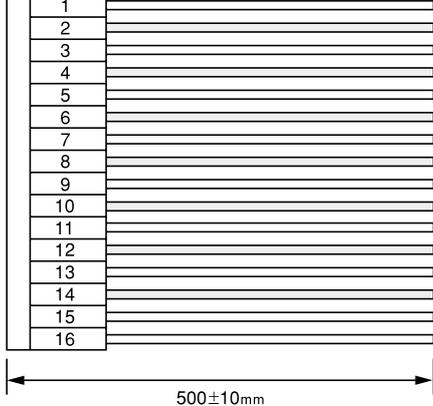
■信号用 ハーネス

<p>品名 HWS-HA-01</p> <p>ハウジング PHDR-12VS</p> <p>接触子 SPHD-001T-P0.5 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1, 2</td> <td>UL1007</td> <td>24</td> <td>赤</td> </tr> <tr> <td>3, 4</td> <td>UL1007</td> <td>24</td> <td>黒</td> </tr> <tr> <td>5, 6</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>7, 8</td> <td>UL1007</td> <td>24</td> <td>茶</td> </tr> <tr> <td>9, 10</td> <td>UL1007</td> <td>24</td> <td>黄</td> </tr> <tr> <td>11, 12</td> <td>—</td> <td>—</td> <td>—</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1, 2	UL1007	24	赤	3, 4	UL1007	24	黒	5, 6	—	—	—	7, 8	UL1007	24	茶	9, 10	UL1007	24	黄	11, 12	—	—	—																								
コネクタ ピン 番号	使用線材	AWG	色																																																			
1, 2	UL1007	24	赤																																																			
3, 4	UL1007	24	黒																																																			
5, 6	—	—	—																																																			
7, 8	UL1007	24	茶																																																			
9, 10	UL1007	24	黄																																																			
11, 12	—	—	—																																																			
<p>品名 HWS-HA-02</p> <p>ハウジング PHDR-12VS</p> <p>接触子 SPHD-001T-P0.5 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1007</td> <td>24</td> <td>赤</td> </tr> <tr> <td>2</td> <td>UL1007</td> <td>24</td> <td>橙</td> </tr> <tr> <td>3</td> <td>UL1007</td> <td>24</td> <td>黒</td> </tr> <tr> <td>4</td> <td>UL1007</td> <td>24</td> <td>青</td> </tr> <tr> <td>5</td> <td>UL1007</td> <td>24</td> <td>茶</td> </tr> <tr> <td>6</td> <td>UL1007</td> <td>24</td> <td>黒</td> </tr> <tr> <td>7</td> <td>UL1007</td> <td>24</td> <td>黄</td> </tr> <tr> <td>8</td> <td>UL1007</td> <td>24</td> <td>茶</td> </tr> <tr> <td>9</td> <td>UL1007</td> <td>24</td> <td>黄</td> </tr> <tr> <td>10</td> <td>UL1007</td> <td>24</td> <td>黒</td> </tr> <tr> <td>11</td> <td>UL1007</td> <td>24</td> <td>青</td> </tr> <tr> <td>12</td> <td>UL1007</td> <td>24</td> <td>黒</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	24	赤	2	UL1007	24	橙	3	UL1007	24	黒	4	UL1007	24	青	5	UL1007	24	茶	6	UL1007	24	黒	7	UL1007	24	黄	8	UL1007	24	茶	9	UL1007	24	黄	10	UL1007	24	黒	11	UL1007	24	青	12	UL1007	24	黒
コネクタ ピン 番号	使用線材	AWG	色																																																			
1	UL1007	24	赤																																																			
2	UL1007	24	橙																																																			
3	UL1007	24	黒																																																			
4	UL1007	24	青																																																			
5	UL1007	24	茶																																																			
6	UL1007	24	黒																																																			
7	UL1007	24	黄																																																			
8	UL1007	24	茶																																																			
9	UL1007	24	黄																																																			
10	UL1007	24	黒																																																			
11	UL1007	24	青																																																			
12	UL1007	24	黒																																																			
<p>品名 HWS-HA-KIT01</p> <p>ハウジング PHDR-12VS</p> <p>接触子 SPHD-001T-P0.5 (日本圧着端子)</p>	<p>ハウジング 1pcs 接触子 20pcs</p>	<p>※接触子、適用線材、及び圧着工具はメーカー指定の品をご使用下さい。</p>																																																				
<p>品名 HA-1-C</p> <p>ハウジング XHP-2</p> <p>接触子 SXH-001T-P0.6 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1007</td> <td>24</td> <td>黄</td> </tr> <tr> <td>2</td> <td>UL1007</td> <td>24</td> <td>青</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	24	黄	2	UL1007	24	青																																								
コネクタ ピン 番号	使用線材	AWG	色																																																			
1	UL1007	24	黄																																																			
2	UL1007	24	青																																																			
<p>品名 HA-2-C</p> <p>ハウジング XAP-02V-1</p> <p>接触子 SXA-01T-P0.6 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1007</td> <td>24</td> <td>黄</td> </tr> <tr> <td>2</td> <td>UL1007</td> <td>24</td> <td>青</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	24	黄	2	UL1007	24	青																																								
コネクタ ピン 番号	使用線材	AWG	色																																																			
1	UL1007	24	黄																																																			
2	UL1007	24	青																																																			
<p>品名 HA-3-C</p> <p>ハウジング PHDR-08VS</p> <p>接触子 SPHD-001T-P0.5 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1007</td> <td>24</td> <td>青</td> </tr> <tr> <td>2</td> <td>UL1007</td> <td>24</td> <td>茶</td> </tr> <tr> <td>3</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>4</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>5</td> <td>UL1007</td> <td>24</td> <td>黄</td> </tr> <tr> <td>6</td> <td>UL1007</td> <td>24</td> <td>黒</td> </tr> <tr> <td>7</td> <td>UL1007</td> <td>24</td> <td>緑</td> </tr> <tr> <td>8</td> <td>UL1007</td> <td>24</td> <td>黒</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	24	青	2	UL1007	24	茶	3	—	—	—	4	—	—	—	5	UL1007	24	黄	6	UL1007	24	黒	7	UL1007	24	緑	8	UL1007	24	黒																
コネクタ ピン 番号	使用線材	AWG	色																																																			
1	UL1007	24	青																																																			
2	UL1007	24	茶																																																			
3	—	—	—																																																			
4	—	—	—																																																			
5	UL1007	24	黄																																																			
6	UL1007	24	黒																																																			
7	UL1007	24	緑																																																			
8	UL1007	24	黒																																																			
<p>品名 HA-4-C</p> <p>ハウジング PHDR-10VS</p> <p>接触子 SPHD-001T-P0.5 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1007</td> <td>24</td> <td>赤</td> </tr> <tr> <td>2</td> <td>UL1007</td> <td>24</td> <td>橙</td> </tr> <tr> <td>3</td> <td>UL1007</td> <td>24</td> <td>黒</td> </tr> <tr> <td>4</td> <td>UL1007</td> <td>24</td> <td>青</td> </tr> <tr> <td>5</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>6</td> <td>UL1007</td> <td>24</td> <td>茶</td> </tr> <tr> <td>7</td> <td>UL1007</td> <td>24</td> <td>黄</td> </tr> <tr> <td>8</td> <td>UL1007</td> <td>24</td> <td>青</td> </tr> <tr> <td>9</td> <td>UL1007</td> <td>24</td> <td>黄</td> </tr> <tr> <td>10</td> <td>UL1007</td> <td>24</td> <td>黒</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	24	赤	2	UL1007	24	橙	3	UL1007	24	黒	4	UL1007	24	青	5	—	—	—	6	UL1007	24	茶	7	UL1007	24	黄	8	UL1007	24	青	9	UL1007	24	黄	10	UL1007	24	黒								
コネクタ ピン 番号	使用線材	AWG	色																																																			
1	UL1007	24	赤																																																			
2	UL1007	24	橙																																																			
3	UL1007	24	黒																																																			
4	UL1007	24	青																																																			
5	—	—	—																																																			
6	UL1007	24	茶																																																			
7	UL1007	24	黄																																																			
8	UL1007	24	青																																																			
9	UL1007	24	黄																																																			
10	UL1007	24	黒																																																			

■信号用 ハーネス

<p>品名 HA-5-C</p> <p>ハウジング PHDR-08VS</p> <p>接触子 SPHD-001T-P0.5 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1007</td><td>24</td><td>青</td></tr> <tr><td>2</td><td>UL1007</td><td>24</td><td>青</td></tr> <tr><td>3</td><td>UL1007</td><td>24</td><td>橙</td></tr> <tr><td>4</td><td>UL1007</td><td>24</td><td>黄</td></tr> <tr><td>5</td><td>UL1007</td><td>24</td><td>紫</td></tr> <tr><td>6</td><td>UL1007</td><td>24</td><td>紫</td></tr> <tr><td>7</td><td>UL1007</td><td>24</td><td>緑</td></tr> <tr><td>8</td><td>UL1007</td><td>24</td><td>黒</td></tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	24	青	2	UL1007	24	青	3	UL1007	24	橙	4	UL1007	24	黄	5	UL1007	24	紫	6	UL1007	24	紫	7	UL1007	24	緑	8	UL1007	24	黒																																																
コネクタ ピン 番号	使用線材	AWG	色																																																																																			
1	UL1007	24	青																																																																																			
2	UL1007	24	青																																																																																			
3	UL1007	24	橙																																																																																			
4	UL1007	24	黄																																																																																			
5	UL1007	24	紫																																																																																			
6	UL1007	24	紫																																																																																			
7	UL1007	24	緑																																																																																			
8	UL1007	24	黒																																																																																			
<p>品名 HA-6-C</p> <p>ハウジング PHDR-10VS</p> <p>接触子 SPHD-001T-P0.5 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1007</td><td>24</td><td>赤</td></tr> <tr><td>2</td><td>UL1007</td><td>24</td><td>橙</td></tr> <tr><td>3</td><td>UL1007</td><td>24</td><td>黄</td></tr> <tr><td>4</td><td>UL1007</td><td>24</td><td>青</td></tr> <tr><td>5</td><td>UL1007</td><td>24</td><td>緑</td></tr> <tr><td>6</td><td>UL1007</td><td>24</td><td>黒</td></tr> <tr><td>7</td><td>UL1007</td><td>24</td><td>茶</td></tr> <tr><td>8</td><td>UL1007</td><td>24</td><td>紫</td></tr> <tr><td>9</td><td>UL1007</td><td>24</td><td>黒</td></tr> <tr><td>10</td><td>UL1007</td><td>24</td><td>青</td></tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	24	赤	2	UL1007	24	橙	3	UL1007	24	黄	4	UL1007	24	青	5	UL1007	24	緑	6	UL1007	24	黒	7	UL1007	24	茶	8	UL1007	24	紫	9	UL1007	24	黒	10	UL1007	24	青																																								
コネクタ ピン 番号	使用線材	AWG	色																																																																																			
1	UL1007	24	赤																																																																																			
2	UL1007	24	橙																																																																																			
3	UL1007	24	黄																																																																																			
4	UL1007	24	青																																																																																			
5	UL1007	24	緑																																																																																			
6	UL1007	24	黒																																																																																			
7	UL1007	24	茶																																																																																			
8	UL1007	24	紫																																																																																			
9	UL1007	24	黒																																																																																			
10	UL1007	24	青																																																																																			
<p>品名 HA-7-C</p> <p>ハウジング PHDR-08VS</p> <p>接触子 SPHD-001T-P0.5 (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1007</td><td>24</td><td>赤</td></tr> <tr><td>2</td><td>UL1007</td><td>24</td><td>黒</td></tr> <tr><td>3</td><td></td><td>—</td><td></td></tr> <tr><td>4</td><td></td><td>—</td><td></td></tr> <tr><td>5</td><td></td><td>—</td><td></td></tr> <tr><td>6</td><td>UL1007</td><td>24</td><td>緑</td></tr> <tr><td>7</td><td>UL1007</td><td>24</td><td>黄</td></tr> <tr><td>8</td><td>UL1007</td><td>24</td><td>青</td></tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	24	赤	2	UL1007	24	黒	3		—		4		—		5		—		6	UL1007	24	緑	7	UL1007	24	黄	8	UL1007	24	青																																																
コネクタ ピン 番号	使用線材	AWG	色																																																																																			
1	UL1007	24	赤																																																																																			
2	UL1007	24	黒																																																																																			
3		—																																																																																				
4		—																																																																																				
5		—																																																																																				
6	UL1007	24	緑																																																																																			
7	UL1007	24	黄																																																																																			
8	UL1007	24	青																																																																																			
<p>品名 HA-8-C</p> <p>ハウジング PHDR-12VS</p> <p>接触子 SPHD-001T-P0.5 (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1007</td><td>24</td><td>赤</td></tr> <tr><td>2</td><td>UL1007</td><td>24</td><td>黒</td></tr> <tr><td>3</td><td></td><td>—</td><td></td></tr> <tr><td>4</td><td></td><td>—</td><td></td></tr> <tr><td>5</td><td>UL1007</td><td>24</td><td>青</td></tr> <tr><td>6</td><td>UL1007</td><td>24</td><td>黄</td></tr> <tr><td>7</td><td>UL1007</td><td>24</td><td>灰</td></tr> <tr><td>8</td><td>UL1007</td><td>24</td><td>緑</td></tr> <tr><td>9</td><td></td><td>—</td><td></td></tr> <tr><td>10</td><td></td><td>—</td><td></td></tr> <tr><td>11</td><td>UL1007</td><td>24</td><td>青</td></tr> <tr><td>12</td><td>UL1007</td><td>24</td><td>橙</td></tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	24	赤	2	UL1007	24	黒	3		—		4		—		5	UL1007	24	青	6	UL1007	24	黄	7	UL1007	24	灰	8	UL1007	24	緑	9		—		10		—		11	UL1007	24	青	12	UL1007	24	橙																																
コネクタ ピン 番号	使用線材	AWG	色																																																																																			
1	UL1007	24	赤																																																																																			
2	UL1007	24	黒																																																																																			
3		—																																																																																				
4		—																																																																																				
5	UL1007	24	青																																																																																			
6	UL1007	24	黄																																																																																			
7	UL1007	24	灰																																																																																			
8	UL1007	24	緑																																																																																			
9		—																																																																																				
10		—																																																																																				
11	UL1007	24	青																																																																																			
12	UL1007	24	橙																																																																																			
<p>品名 HA-9-C</p> <p>ハウジング PHDR-20VS</p> <p>接触子 SPHD-001T-P0.5 (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1007</td><td>24</td><td>赤</td></tr> <tr><td>2</td><td>UL1007</td><td>24</td><td>橙</td></tr> <tr><td>3</td><td></td><td>—</td><td></td></tr> <tr><td>4</td><td></td><td>—</td><td></td></tr> <tr><td>5</td><td>UL1007</td><td>24</td><td>黒</td></tr> <tr><td>6</td><td>UL1007</td><td>24</td><td>青</td></tr> <tr><td>7</td><td>UL1007</td><td>24</td><td>茶</td></tr> <tr><td>8</td><td>UL1007</td><td>24</td><td>橙</td></tr> <tr><td>9</td><td>UL1007</td><td>24</td><td>黄</td></tr> <tr><td>10</td><td>UL1007</td><td>24</td><td>青</td></tr> <tr><td>11</td><td>UL1007</td><td>24</td><td>緑</td></tr> <tr><td>12</td><td>UL1007</td><td>24</td><td>白</td></tr> <tr><td>13</td><td>UL1007</td><td>24</td><td>黄</td></tr> <tr><td>14</td><td>UL10368</td><td>22</td><td>赤</td></tr> <tr><td>15</td><td>UL1007</td><td>24</td><td>黄</td></tr> <tr><td>16</td><td>UL10368</td><td>22</td><td>黒</td></tr> <tr><td>17</td><td>UL1007</td><td>24</td><td>黒</td></tr> <tr><td>18</td><td>UL1007</td><td>24</td><td>黒</td></tr> <tr><td>19</td><td>UL1007</td><td>24</td><td>橙</td></tr> <tr><td>20</td><td>UL1007</td><td>24</td><td>紫</td></tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	24	赤	2	UL1007	24	橙	3		—		4		—		5	UL1007	24	黒	6	UL1007	24	青	7	UL1007	24	茶	8	UL1007	24	橙	9	UL1007	24	黄	10	UL1007	24	青	11	UL1007	24	緑	12	UL1007	24	白	13	UL1007	24	黄	14	UL10368	22	赤	15	UL1007	24	黄	16	UL10368	22	黒	17	UL1007	24	黒	18	UL1007	24	黒	19	UL1007	24	橙	20	UL1007	24	紫
コネクタ ピン 番号	使用線材	AWG	色																																																																																			
1	UL1007	24	赤																																																																																			
2	UL1007	24	橙																																																																																			
3		—																																																																																				
4		—																																																																																				
5	UL1007	24	黒																																																																																			
6	UL1007	24	青																																																																																			
7	UL1007	24	茶																																																																																			
8	UL1007	24	橙																																																																																			
9	UL1007	24	黄																																																																																			
10	UL1007	24	青																																																																																			
11	UL1007	24	緑																																																																																			
12	UL1007	24	白																																																																																			
13	UL1007	24	黄																																																																																			
14	UL10368	22	赤																																																																																			
15	UL1007	24	黄																																																																																			
16	UL10368	22	黒																																																																																			
17	UL1007	24	黒																																																																																			
18	UL1007	24	黒																																																																																			
19	UL1007	24	橙																																																																																			
20	UL1007	24	紫																																																																																			

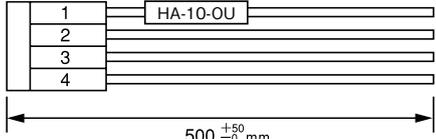
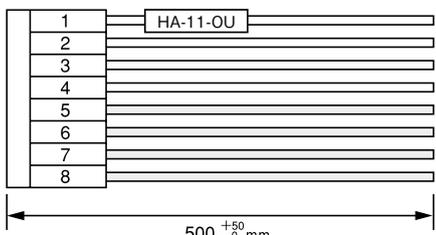
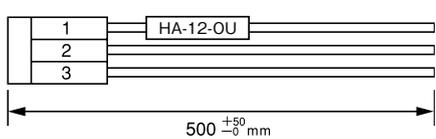
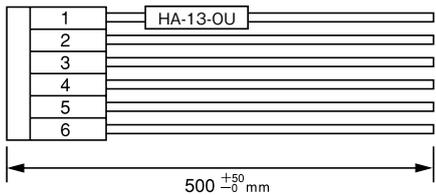
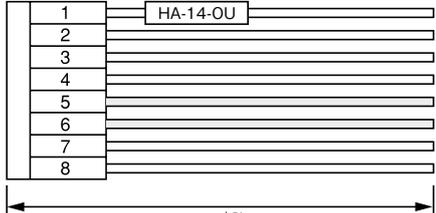
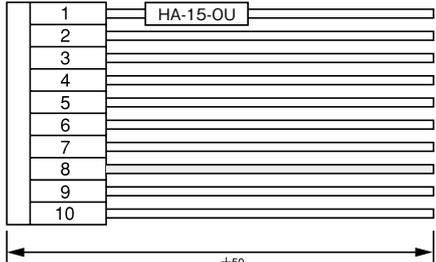


■信号用 ハーネス

<p>品名 ハウジング 接触子</p>	<p>HA-10-C PHDR-08VS (日本圧着端子製造) SPHD-001T-P0.5 (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL10368</td><td>22</td><td>赤</td></tr> <tr><td>2</td><td>UL10368</td><td>22</td><td>黒</td></tr> <tr><td>3</td><td>UL1007</td><td>24</td><td>橙</td></tr> <tr><td>4</td><td>UL1007</td><td>24</td><td>青</td></tr> <tr><td>5</td><td></td><td>-</td><td></td></tr> <tr><td>6</td><td>UL1007</td><td>24</td><td>緑</td></tr> <tr><td>7</td><td>UL1007</td><td>24</td><td>黄</td></tr> <tr><td>8</td><td>UL1007</td><td>24</td><td>青</td></tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL10368	22	赤	2	UL10368	22	黒	3	UL1007	24	橙	4	UL1007	24	青	5		-		6	UL1007	24	緑	7	UL1007	24	黄	8	UL1007	24	青																																
コネクタ ピン 番号	使用線材	AWG	色																																																																				
1	UL10368	22	赤																																																																				
2	UL10368	22	黒																																																																				
3	UL1007	24	橙																																																																				
4	UL1007	24	青																																																																				
5		-																																																																					
6	UL1007	24	緑																																																																				
7	UL1007	24	黄																																																																				
8	UL1007	24	青																																																																				
<p>品名 ハウジング 接触子</p>	<p>HA-11-C XHP-2 (日本圧着端子製造) SXH-001T-P0.6 (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL10368</td><td>22</td><td>赤</td></tr> <tr><td>2</td><td>UL10368</td><td>22</td><td>黒</td></tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL10368	22	赤	2	UL10368	22	黒																																																								
コネクタ ピン 番号	使用線材	AWG	色																																																																				
1	UL10368	22	赤																																																																				
2	UL10368	22	黒																																																																				
<p>品名 ハウジング 接触子</p>	<p>HA-12-C PHDR-08VS (日本圧着端子製造) SPHD-001T-P0.5 (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1007</td><td>24</td><td>灰</td></tr> <tr><td>2</td><td>UL1007</td><td>24</td><td>紫</td></tr> <tr><td>3</td><td>UL1007</td><td>24</td><td>灰</td></tr> <tr><td>4</td><td>UL1007</td><td>24</td><td>黄</td></tr> <tr><td>5</td><td>UL1007</td><td>24</td><td>青</td></tr> <tr><td>6</td><td>UL1007</td><td>24</td><td>橙</td></tr> <tr><td>7</td><td>UL1007</td><td>24</td><td>青</td></tr> <tr><td>8</td><td>UL1007</td><td>24</td><td>橙</td></tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	24	灰	2	UL1007	24	紫	3	UL1007	24	灰	4	UL1007	24	黄	5	UL1007	24	青	6	UL1007	24	橙	7	UL1007	24	青	8	UL1007	24	橙																																
コネクタ ピン 番号	使用線材	AWG	色																																																																				
1	UL1007	24	灰																																																																				
2	UL1007	24	紫																																																																				
3	UL1007	24	灰																																																																				
4	UL1007	24	黄																																																																				
5	UL1007	24	青																																																																				
6	UL1007	24	橙																																																																				
7	UL1007	24	青																																																																				
8	UL1007	24	橙																																																																				
<p>品名 ハウジング 接触子</p>	<p>HA-13-C XHP-6 (日本圧着端子製造) SXH-001T-P0.6 (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1007</td><td>24</td><td>青</td></tr> <tr><td>2</td><td>UL1007</td><td>24</td><td>茶</td></tr> <tr><td>3</td><td>UL1007</td><td>24</td><td>灰</td></tr> <tr><td>4</td><td>UL1007</td><td>24</td><td>黄</td></tr> <tr><td>5</td><td>UL1007</td><td>24</td><td>白</td></tr> <tr><td>6</td><td>UL1007</td><td>24</td><td>橙</td></tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	24	青	2	UL1007	24	茶	3	UL1007	24	灰	4	UL1007	24	黄	5	UL1007	24	白	6	UL1007	24	橙																																								
コネクタ ピン 番号	使用線材	AWG	色																																																																				
1	UL1007	24	青																																																																				
2	UL1007	24	茶																																																																				
3	UL1007	24	灰																																																																				
4	UL1007	24	黄																																																																				
5	UL1007	24	白																																																																				
6	UL1007	24	橙																																																																				
<p>品名 ハウジング 接触子</p>	<p>HA-14-C XHP-4 (日本圧着端子製造) SXH-001T-P0.6 (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1007</td><td>22</td><td>黄</td></tr> <tr><td>2</td><td>UL1007</td><td>22</td><td>灰</td></tr> <tr><td>3</td><td>UL1007</td><td>22</td><td>赤</td></tr> <tr><td>4</td><td>UL1007</td><td>22</td><td>黒</td></tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	22	黄	2	UL1007	22	灰	3	UL1007	22	赤	4	UL1007	22	黒																																																
コネクタ ピン 番号	使用線材	AWG	色																																																																				
1	UL1007	22	黄																																																																				
2	UL1007	22	灰																																																																				
3	UL1007	22	赤																																																																				
4	UL1007	22	黒																																																																				
<p>品名 ハウジング 接触子</p>	<p>EZA-CNHA-1 PADP-16V-1-S SPH-002T-P0.5L SPND-002T-C0.5 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1007</td><td>28</td><td>赤</td></tr> <tr><td>2</td><td>UL1007</td><td>28</td><td>黒</td></tr> <tr><td>3</td><td>UL1007</td><td>28</td><td>白</td></tr> <tr><td>4</td><td>UL1007</td><td>28</td><td>黒</td></tr> <tr><td>5</td><td>UL1007</td><td>28</td><td>黄</td></tr> <tr><td>6</td><td>UL1007</td><td>28</td><td>黒</td></tr> <tr><td>7</td><td>UL1007</td><td>28</td><td>青</td></tr> <tr><td>8</td><td>UL1007</td><td>28</td><td>黒</td></tr> <tr><td>9</td><td>UL1007</td><td>28</td><td>緑</td></tr> <tr><td>10</td><td>UL1007</td><td>28</td><td>黒</td></tr> <tr><td>11</td><td>UL1007</td><td>28</td><td>橙</td></tr> <tr><td>12</td><td>UL1007</td><td>28</td><td>黒</td></tr> <tr><td>13</td><td>UL1007</td><td>28</td><td>灰</td></tr> <tr><td>14</td><td>UL1007</td><td>28</td><td>黒</td></tr> <tr><td>15</td><td>UL1007</td><td>28</td><td>紫</td></tr> <tr><td>16</td><td>UL1007</td><td>28</td><td>灰</td></tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	28	赤	2	UL1007	28	黒	3	UL1007	28	白	4	UL1007	28	黒	5	UL1007	28	黄	6	UL1007	28	黒	7	UL1007	28	青	8	UL1007	28	黒	9	UL1007	28	緑	10	UL1007	28	黒	11	UL1007	28	橙	12	UL1007	28	黒	13	UL1007	28	灰	14	UL1007	28	黒	15	UL1007	28	紫	16	UL1007	28	灰
コネクタ ピン 番号	使用線材	AWG	色																																																																				
1	UL1007	28	赤																																																																				
2	UL1007	28	黒																																																																				
3	UL1007	28	白																																																																				
4	UL1007	28	黒																																																																				
5	UL1007	28	黄																																																																				
6	UL1007	28	黒																																																																				
7	UL1007	28	青																																																																				
8	UL1007	28	黒																																																																				
9	UL1007	28	緑																																																																				
10	UL1007	28	黒																																																																				
11	UL1007	28	橙																																																																				
12	UL1007	28	黒																																																																				
13	UL1007	28	灰																																																																				
14	UL1007	28	黒																																																																				
15	UL1007	28	紫																																																																				
16	UL1007	28	灰																																																																				

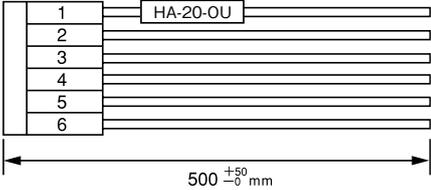
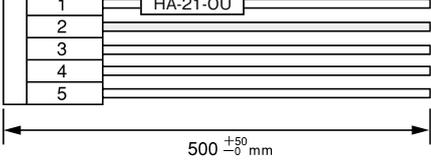
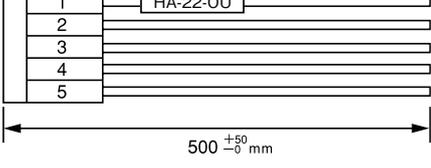
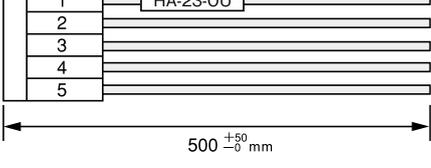
■出力用 ハーネス

<p>品名 ハウジング 接触子</p>	<p>HA-1-OU XHP-2 SXH-001T-P0.6 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1007</td> <td>22</td> <td>黒</td> </tr> <tr> <td>2</td> <td>UL1007</td> <td>22</td> <td>赤</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	22	黒	2	UL1007	22	赤																								
コネクタ ピン 番号	使用線材	AWG	色																																				
1	UL1007	22	黒																																				
2	UL1007	22	赤																																				
<p>品名 ハウジング 接触子</p>	<p>HA-2-OU XHP-4 SXH-001T-P0.6 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1007</td> <td>22</td> <td>黒</td> </tr> <tr> <td>2</td> <td>UL1007</td> <td>22</td> <td>黒</td> </tr> <tr> <td>3</td> <td>UL1007</td> <td>22</td> <td>赤</td> </tr> <tr> <td>4</td> <td>UL1007</td> <td>22</td> <td>赤</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1007	22	黒	2	UL1007	22	黒	3	UL1007	22	赤	4	UL1007	22	赤																
コネクタ ピン 番号	使用線材	AWG	色																																				
1	UL1007	22	黒																																				
2	UL1007	22	黒																																				
3	UL1007	22	赤																																				
4	UL1007	22	赤																																				
<p>品名 ハウジング 接触子</p>	<p>HA-3-OU VHR-4N SVH-21T-P1.1 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>2</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>3</td> <td>UL1015</td> <td>18</td> <td>赤</td> </tr> <tr> <td>4</td> <td>UL1015</td> <td>18</td> <td>赤</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1015	18	黒	2	UL1015	18	黒	3	UL1015	18	赤	4	UL1015	18	赤																
コネクタ ピン 番号	使用線材	AWG	色																																				
1	UL1015	18	黒																																				
2	UL1015	18	黒																																				
3	UL1015	18	赤																																				
4	UL1015	18	赤																																				
<p>品名 ハウジング 接触子</p>	<p>HA-4-OU VHR-6N SVH-21T-P1.1 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>2</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>3</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>4</td> <td>UL1015</td> <td>18</td> <td>赤</td> </tr> <tr> <td>5</td> <td>UL1015</td> <td>18</td> <td>赤</td> </tr> <tr> <td>6</td> <td>UL1015</td> <td>18</td> <td>赤</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1015	18	黒	2	UL1015	18	黒	3	UL1015	18	黒	4	UL1015	18	赤	5	UL1015	18	赤	6	UL1015	18	赤								
コネクタ ピン 番号	使用線材	AWG	色																																				
1	UL1015	18	黒																																				
2	UL1015	18	黒																																				
3	UL1015	18	黒																																				
4	UL1015	18	赤																																				
5	UL1015	18	赤																																				
6	UL1015	18	赤																																				
<p>品名 ハウジング 接触子</p>	<p>HA-5-OU VHR-8N SVH-21T-P1.1 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>2</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>3</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>4</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>5</td> <td>UL1015</td> <td>18</td> <td>赤</td> </tr> <tr> <td>6</td> <td>UL1015</td> <td>18</td> <td>赤</td> </tr> <tr> <td>7</td> <td>UL1015</td> <td>18</td> <td>赤</td> </tr> <tr> <td>8</td> <td>UL1015</td> <td>18</td> <td>赤</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1015	18	黒	2	UL1015	18	黒	3	UL1015	18	黒	4	UL1015	18	黒	5	UL1015	18	赤	6	UL1015	18	赤	7	UL1015	18	赤	8	UL1015	18	赤
コネクタ ピン 番号	使用線材	AWG	色																																				
1	UL1015	18	黒																																				
2	UL1015	18	黒																																				
3	UL1015	18	黒																																				
4	UL1015	18	黒																																				
5	UL1015	18	赤																																				
6	UL1015	18	赤																																				
7	UL1015	18	赤																																				
8	UL1015	18	赤																																				
<p>品名 ハウジング 接触子</p>	<p>HA-6-OU VHR-6N SVH-21T-P1.1 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1015</td> <td>18</td> <td>赤</td> </tr> <tr> <td>2</td> <td>UL1015</td> <td>18</td> <td>赤</td> </tr> <tr> <td>3</td> <td>UL1015</td> <td>18</td> <td>赤</td> </tr> <tr> <td>4</td> <td>UL1015</td> <td>18</td> <td>赤</td> </tr> <tr> <td>5</td> <td>UL1015</td> <td>18</td> <td>赤</td> </tr> <tr> <td>6</td> <td>UL1015</td> <td>18</td> <td>赤</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1015	18	赤	2	UL1015	18	赤	3	UL1015	18	赤	4	UL1015	18	赤	5	UL1015	18	赤	6	UL1015	18	赤								
コネクタ ピン 番号	使用線材	AWG	色																																				
1	UL1015	18	赤																																				
2	UL1015	18	赤																																				
3	UL1015	18	赤																																				
4	UL1015	18	赤																																				
5	UL1015	18	赤																																				
6	UL1015	18	赤																																				
<p>品名 ハウジング 接触子</p>	<p>HA-7-OU VHR-7N SVH-21T-P1.1 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>2</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>3</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>4</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>5</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>6</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>7</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1015	18	黒	2	UL1015	18	黒	3	UL1015	18	黒	4	UL1015	18	黒	5	UL1015	18	黒	6	UL1015	18	黒	7	UL1015	18	黒				
コネクタ ピン 番号	使用線材	AWG	色																																				
1	UL1015	18	黒																																				
2	UL1015	18	黒																																				
3	UL1015	18	黒																																				
4	UL1015	18	黒																																				
5	UL1015	18	黒																																				
6	UL1015	18	黒																																				
7	UL1015	18	黒																																				
<p>品名 ハウジング 接触子</p>	<p>HA-9-OU VHR-8N SVH-21T-P1.1 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>UL1015</td> <td>18</td> <td>赤</td> </tr> <tr> <td>2</td> <td>UL1015</td> <td>18</td> <td>赤</td> </tr> <tr> <td>3</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>4</td> <td>UL1015</td> <td>18</td> <td>黒</td> </tr> <tr> <td>5</td> <td>UL1015</td> <td>18</td> <td>橙</td> </tr> <tr> <td>6</td> <td>UL1015</td> <td>18</td> <td>灰</td> </tr> <tr> <td>7</td> <td>UL1015</td> <td>18</td> <td>灰</td> </tr> <tr> <td>8</td> <td>UL1015</td> <td>18</td> <td>紫</td> </tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1015	18	赤	2	UL1015	18	赤	3	UL1015	18	黒	4	UL1015	18	黒	5	UL1015	18	橙	6	UL1015	18	灰	7	UL1015	18	灰	8	UL1015	18	紫
コネクタ ピン 番号	使用線材	AWG	色																																				
1	UL1015	18	赤																																				
2	UL1015	18	赤																																				
3	UL1015	18	黒																																				
4	UL1015	18	黒																																				
5	UL1015	18	橙																																				
6	UL1015	18	灰																																				
7	UL1015	18	灰																																				
8	UL1015	18	紫																																				

■出力用 ハーネス

<p>品名 ハウジング 接触子</p>	<p>HA-10-OU VHR-4N SVH-21T-P1.1 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1015</td><td>18</td><td>茶</td></tr> <tr><td>2</td><td>UL1015</td><td>18</td><td>茶</td></tr> <tr><td>3</td><td>UL1015</td><td>18</td><td>青</td></tr> <tr><td>4</td><td>UL1015</td><td>18</td><td>青</td></tr> </tbody> </table>	コネクタ ピン番号	使用線材	AWG	色	1	UL1015	18	茶	2	UL1015	18	茶	3	UL1015	18	青	4	UL1015	18	青																								
コネクタ ピン番号	使用線材	AWG	色																																												
1	UL1015	18	茶																																												
2	UL1015	18	茶																																												
3	UL1015	18	青																																												
4	UL1015	18	青																																												
<p>品名 ハウジング 接触子</p>	<p>HA-11-OU VHR-8N SVH-21T-P1.1 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1015</td><td>18</td><td>赤</td></tr> <tr><td>2</td><td>UL1015</td><td>18</td><td>赤</td></tr> <tr><td>3</td><td>UL1015</td><td>18</td><td>赤</td></tr> <tr><td>4</td><td>UL1015</td><td>18</td><td>赤</td></tr> <tr><td>5</td><td>UL1015</td><td>18</td><td>黒</td></tr> <tr><td>6</td><td>UL1015</td><td>18</td><td>黒</td></tr> <tr><td>7</td><td>UL1015</td><td>18</td><td>黒</td></tr> <tr><td>8</td><td>UL1015</td><td>18</td><td>黒</td></tr> </tbody> </table>	コネクタ ピン番号	使用線材	AWG	色	1	UL1015	18	赤	2	UL1015	18	赤	3	UL1015	18	赤	4	UL1015	18	赤	5	UL1015	18	黒	6	UL1015	18	黒	7	UL1015	18	黒	8	UL1015	18	黒								
コネクタ ピン番号	使用線材	AWG	色																																												
1	UL1015	18	赤																																												
2	UL1015	18	赤																																												
3	UL1015	18	赤																																												
4	UL1015	18	赤																																												
5	UL1015	18	黒																																												
6	UL1015	18	黒																																												
7	UL1015	18	黒																																												
8	UL1015	18	黒																																												
<p>品名 ハウジング 接触子</p>	<p>HA-12-OU VHR-3N SVH-21T-P1.1 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1015</td><td>18</td><td>橙</td></tr> <tr><td>2</td><td>UL1015</td><td>18</td><td>灰</td></tr> <tr><td>3</td><td>UL1015</td><td>18</td><td>紫</td></tr> </tbody> </table>	コネクタ ピン番号	使用線材	AWG	色	1	UL1015	18	橙	2	UL1015	18	灰	3	UL1015	18	紫																												
コネクタ ピン番号	使用線材	AWG	色																																												
1	UL1015	18	橙																																												
2	UL1015	18	灰																																												
3	UL1015	18	紫																																												
<p>品名 ハウジング 接触子</p>	<p>HA-13-OU VHR-6N SVH-21T-P1.1 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1015</td><td>18</td><td>茶</td></tr> <tr><td>2</td><td>UL1015</td><td>18</td><td>茶</td></tr> <tr><td>3</td><td>UL1015</td><td>18</td><td>茶</td></tr> <tr><td>4</td><td>UL1015</td><td>18</td><td>青</td></tr> <tr><td>5</td><td>UL1015</td><td>18</td><td>青</td></tr> <tr><td>6</td><td>UL1015</td><td>18</td><td>青</td></tr> </tbody> </table>	コネクタ ピン番号	使用線材	AWG	色	1	UL1015	18	茶	2	UL1015	18	茶	3	UL1015	18	茶	4	UL1015	18	青	5	UL1015	18	青	6	UL1015	18	青																
コネクタ ピン番号	使用線材	AWG	色																																												
1	UL1015	18	茶																																												
2	UL1015	18	茶																																												
3	UL1015	18	茶																																												
4	UL1015	18	青																																												
5	UL1015	18	青																																												
6	UL1015	18	青																																												
<p>品名 ハウジング 接触子</p>	<p>HA-14-OU VHR-8N SVH-21T-P1.1 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1015</td><td>18</td><td>灰</td></tr> <tr><td>2</td><td>UL1015</td><td>18</td><td>灰</td></tr> <tr><td>3</td><td>UL1015</td><td>18</td><td>橙</td></tr> <tr><td>4</td><td>UL1015</td><td>18</td><td>橙</td></tr> <tr><td>5</td><td>UL1015</td><td>18</td><td>黒</td></tr> <tr><td>6</td><td>UL1015</td><td>18</td><td>黒</td></tr> <tr><td>7</td><td>UL1015</td><td>18</td><td>赤</td></tr> <tr><td>8</td><td>UL1015</td><td>18</td><td>赤</td></tr> </tbody> </table>	コネクタ ピン番号	使用線材	AWG	色	1	UL1015	18	灰	2	UL1015	18	灰	3	UL1015	18	橙	4	UL1015	18	橙	5	UL1015	18	黒	6	UL1015	18	黒	7	UL1015	18	赤	8	UL1015	18	赤								
コネクタ ピン番号	使用線材	AWG	色																																												
1	UL1015	18	灰																																												
2	UL1015	18	灰																																												
3	UL1015	18	橙																																												
4	UL1015	18	橙																																												
5	UL1015	18	黒																																												
6	UL1015	18	黒																																												
7	UL1015	18	赤																																												
8	UL1015	18	赤																																												
<p>品名 ハウジング 接触子</p>	<p>HA-15-OU VHR-10N SVH-21T-P1.1 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1015</td><td>18</td><td>灰</td></tr> <tr><td>2</td><td>UL1015</td><td>18</td><td>灰</td></tr> <tr><td>3</td><td>UL1015</td><td>18</td><td>灰</td></tr> <tr><td>4</td><td>UL1015</td><td>18</td><td>橙</td></tr> <tr><td>5</td><td>UL1015</td><td>18</td><td>橙</td></tr> <tr><td>6</td><td>UL1015</td><td>18</td><td>橙</td></tr> <tr><td>7</td><td>UL1015</td><td>18</td><td>黒</td></tr> <tr><td>8</td><td>UL1015</td><td>18</td><td>黒</td></tr> <tr><td>9</td><td>UL1015</td><td>18</td><td>赤</td></tr> <tr><td>10</td><td>UL1015</td><td>18</td><td>赤</td></tr> </tbody> </table>	コネクタ ピン番号	使用線材	AWG	色	1	UL1015	18	灰	2	UL1015	18	灰	3	UL1015	18	灰	4	UL1015	18	橙	5	UL1015	18	橙	6	UL1015	18	橙	7	UL1015	18	黒	8	UL1015	18	黒	9	UL1015	18	赤	10	UL1015	18	赤
コネクタ ピン番号	使用線材	AWG	色																																												
1	UL1015	18	灰																																												
2	UL1015	18	灰																																												
3	UL1015	18	灰																																												
4	UL1015	18	橙																																												
5	UL1015	18	橙																																												
6	UL1015	18	橙																																												
7	UL1015	18	黒																																												
8	UL1015	18	黒																																												
9	UL1015	18	赤																																												
10	UL1015	18	赤																																												
<p>品名 ハウジング 接触子</p>	<p>HA-16-OU VHR-2N(JST) SVH-21T-P1.1 (日本圧着端子)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1015</td><td>18</td><td>黒</td></tr> <tr><td>2</td><td>UL1015</td><td>18</td><td>赤</td></tr> </tbody> </table>	コネクタ ピン番号	使用線材	AWG	色	1	UL1015	18	黒	2	UL1015	18	赤																																
コネクタ ピン番号	使用線材	AWG	色																																												
1	UL1015	18	黒																																												
2	UL1015	18	赤																																												
<p>品名 ハウジング 接触子</p>	<p>HA-19-OU VHR-4N SVH-41T-P1.1 (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1430</td><td>16</td><td>赤</td></tr> <tr><td>2</td><td>UL1430</td><td>16</td><td>赤</td></tr> <tr><td>3</td><td>UL1430</td><td>16</td><td>青</td></tr> <tr><td>4</td><td>UL1430</td><td>16</td><td>青</td></tr> </tbody> </table>	コネクタ ピン番号	使用線材	AWG	色	1	UL1430	16	赤	2	UL1430	16	赤	3	UL1430	16	青	4	UL1430	16	青																								
コネクタ ピン番号	使用線材	AWG	色																																												
1	UL1430	16	赤																																												
2	UL1430	16	赤																																												
3	UL1430	16	青																																												
4	UL1430	16	青																																												

■出力用 ハーネス

<p>品名 ハウジング 接触子</p>	<p>HA-20-OU VHR-6N SVH-41T-P1.1 (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1430</td><td>16</td><td>赤</td></tr> <tr><td>2</td><td>UL1430</td><td>16</td><td>赤</td></tr> <tr><td>3</td><td>UL1430</td><td>16</td><td>赤</td></tr> <tr><td>4</td><td>UL1430</td><td>16</td><td>青</td></tr> <tr><td>5</td><td>UL1430</td><td>16</td><td>青</td></tr> <tr><td>6</td><td>UL1430</td><td>16</td><td>青</td></tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1430	16	赤	2	UL1430	16	赤	3	UL1430	16	赤	4	UL1430	16	青	5	UL1430	16	青	6	UL1430	16	青
コネクタ ピン 番号	使用線材	AWG	色																												
1	UL1430	16	赤																												
2	UL1430	16	赤																												
3	UL1430	16	赤																												
4	UL1430	16	青																												
5	UL1430	16	青																												
6	UL1430	16	青																												
<p>品名 ハウジング 接触子</p>	<p>HA-21-OU VHR-5N SVH-21T-P1.1 (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1015</td><td>18</td><td>赤</td></tr> <tr><td>2</td><td>UL1015</td><td>18</td><td>黒</td></tr> <tr><td>3</td><td>UL1015</td><td>18</td><td>橙</td></tr> <tr><td>4</td><td>UL1015</td><td>18</td><td>灰</td></tr> <tr><td>5</td><td>UL1015</td><td>18</td><td>紫</td></tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1015	18	赤	2	UL1015	18	黒	3	UL1015	18	橙	4	UL1015	18	灰	5	UL1015	18	紫				
コネクタ ピン 番号	使用線材	AWG	色																												
1	UL1015	18	赤																												
2	UL1015	18	黒																												
3	UL1015	18	橙																												
4	UL1015	18	灰																												
5	UL1015	18	紫																												
<p>品名 ハウジング 接触子</p>	<p>HA-22-OU VHR-5N (日本圧着端子製造) SVH-41T-P1.1 (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1430</td><td>16</td><td>赤</td></tr> <tr><td>2</td><td>UL1430</td><td>16</td><td>赤</td></tr> <tr><td>3</td><td>UL1430</td><td>16</td><td>赤</td></tr> <tr><td>4</td><td>UL1430</td><td>16</td><td>赤</td></tr> <tr><td>5</td><td>UL1430</td><td>16</td><td>赤</td></tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1430	16	赤	2	UL1430	16	赤	3	UL1430	16	赤	4	UL1430	16	赤	5	UL1430	16	赤				
コネクタ ピン 番号	使用線材	AWG	色																												
1	UL1430	16	赤																												
2	UL1430	16	赤																												
3	UL1430	16	赤																												
4	UL1430	16	赤																												
5	UL1430	16	赤																												
<p>品名 ハウジング 接触子</p>	<p>HA-23-OU VHR-5N (日本圧着端子製造) SVH-41T-P1.1 (日本圧着端子製造)</p>		<table border="1"> <thead> <tr> <th>コネクタ ピン 番号</th> <th>使用線材</th> <th>AWG</th> <th>色</th> </tr> </thead> <tbody> <tr><td>1</td><td>UL1430</td><td>16</td><td>黒</td></tr> <tr><td>2</td><td>UL1430</td><td>16</td><td>黒</td></tr> <tr><td>3</td><td>UL1430</td><td>16</td><td>黒</td></tr> <tr><td>4</td><td>UL1430</td><td>16</td><td>黒</td></tr> <tr><td>5</td><td>UL1430</td><td>16</td><td>黒</td></tr> </tbody> </table>	コネクタ ピン 番号	使用線材	AWG	色	1	UL1430	16	黒	2	UL1430	16	黒	3	UL1430	16	黒	4	UL1430	16	黒	5	UL1430	16	黒				
コネクタ ピン 番号	使用線材	AWG	色																												
1	UL1430	16	黒																												
2	UL1430	16	黒																												
3	UL1430	16	黒																												
4	UL1430	16	黒																												
5	UL1430	16	黒																												