
# **Undervoltage Sensing Circuit**

The MC34064 is an undervoltage sensing circuit specifically designed for use as a reset controller in microprocessor-based systems. It offers the designer an economical solution for low voltage detection with a single external resistor. The MC34064 features a trimmed-in-package bandgap reference, and a comparator with precise thresholds and built-in hysteresis to prevent erratic reset operation. The open collector reset output is capable of sinking in excess of 10 mA, and operation is guaranteed down to 1.0 V input with low standby current. The MC devices are packaged in 3-pin TO-92, micro size TSOP-5, 8-pin SOIC-8 and Micro8™ surface mount packages. The NCV device is packaged in SOIC-8 and TO-92.

Applications include direct monitoring of the 5.0 V MPU/logic power supply used in appliance, automotive, consumer and industrial equipment.

#### **Features**

- Trimmed-In-Package Temperature Compensated Reference
- Comparator Threshold of 4.6 V at 25°C
- Precise Comparator Thresholds Guaranteed Over Temperature
- Comparator Hysteresis Prevents Erratic Reset
- Reset Output Capable of Sinking in Excess of 10 mA
- Internal Clamp Diode for Discharging Delay Capacitor
- Guaranteed Reset Operation with 1.0 V Input
- Low Standby Current
- Economical TO-92, TSOP-5, SOIC-8 and Micro8 Surface Mount Packages
- NCV Prefix for Automotive and Other Applications Requiring Site and Control Changes
- These Devices are Pb-Free and are RoHS Compliant



This device contains 21 active transistors.

Figure 1. Representative Block Diagram



#### ON Semiconductor®

www.onsemi.com



SOIC-8 D SUFFIX CASE 751




Micro8 DM SUFFIX CASE 846A



TSOP-5 SN SUFFIX CASE 483

- Pin 1. Ground
  - 2. Input
  - 3. Reset
  - 4. NC
  - 5. NC





TO-92 P SUFFIX CASE 29


Pin 1. Reset

Input

Ground

#### **PIN CONNECTIONS**

AMMO PACK



#### **ORDERING INFORMATION**

See detailed ordering and shipping information in the package dimensions section on page 6 of this data sheet.

#### **DEVICE MARKING INFORMATION**

See general marking information in the device marking section on page 7 of this data sheet.

#### **MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
Power Input Supply Voltage	V <sub>in</sub>	–1.0 to 10	V
Reset Output Voltage	V <sub>O</sub>	10	V
Reset Output Sink Current (Note 2)	I <sub>Sink</sub>	Internally Limited	mA
Clamp Diode Forward Current, Reset to Input Pin (Note 2)	I <sub>F</sub>	100	mA
Power Dissipation and Thermal Characteristics P Suffix, Plastic Package Maximum Power Dissipation @ T <sub>A</sub> = 25°C Thermal Resistance, Junction-to-Air D Suffix, Plastic Package Maximum Power Dissipation @ T <sub>A</sub> = 25°C Thermal Resistance, Junction-to-Air DM Suffix, Plastic Package Maximum Power Dissipation @ T <sub>A</sub> = 25°C Thermal Resistance, Junction-to-Air	P <sub>D</sub> R <sub>θJA</sub> P <sub>D</sub> R <sub>θJA</sub> P <sub>D</sub> R <sub>θJA</sub>	625 200 625 200 520 240	mW °C/W mW °C/W mW °C/W
Operating Junction Temperature	TJ	+150	°C
Operating Ambient Temperature MC34064 MC33064 NCV33064	T <sub>A</sub>	0 to +70 -40 to +85 -40 to +125	°C
Storage Temperature Range	T <sub>stg</sub>	-65 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

## **ELECTRICAL CHARACTERISTICS** (For typical values $T_A = 25^{\circ}$ C, for min/max values $T_A$ is the operating ambient temperature range that applies [Notes 3 and 4] unless otherwise noted.)

Characteristics	Symbol	Min	Тур	Max	Unit
COMPARATOR	•	•	•	•	•
Threshold Voltage High State Output (V <sub>in</sub> Increasing) Low State Output (V <sub>in</sub> Decreasing) Hysteresis	V <sub>IH</sub> V <sub>IL</sub> V <sub>H</sub>	4.5 4.5 0.01	4.61 4.59 0.02	4.7 4.7 0.05	V
RESET OUTPUT					
Output Sink Saturation $(V_{in} = 4.0 \text{ V, } I_{Sink} = 8.0 \text{ mA})$ $(V_{in} = 4.0 \text{ V, } I_{Sink} = 2.0 \text{ mA})$ $(V_{in} = 1.0 \text{ V, } I_{Sink} = 0.1 \text{ mA})$	V <sub>OL</sub>	- - -	0.46 0.15 -	1.0 0.4 0.1	V
Output Sink Current (V <sub>in</sub> , Reset = 4.0 V)	I <sub>Sink</sub>	10	27	60	mA
Output Off-State Leakage (V <sub>in</sub> , Reset = 5.0 V)	I <sub>OH</sub>	-	0.02	0.5	μΑ
Clamp Diode Forward Voltage, Reset to Input Pin (I <sub>F</sub> = 10 mA)	V <sub>F</sub>	0.6	0.9	1.2	V
TOTAL DEVICE					
Operating Input Voltage Range	V <sub>in</sub>	1.0 to 6.5	-	-	V
Quiescent Input Current (V <sub>in</sub> = 5.0 V)	I <sub>in</sub>	_	390	500	μΑ

- 2. Maximum package power dissipation limits must be observed.
- 3. Low duty cycle pulse techniques are used during test to maintain junction temperature as close to ambient as possible.
- 5. NCV prefix is for automotive and other applications requiring site and change control.

<sup>1.</sup> ESD data available upon request.




Figure 2. Reset Output Voltage versus Input Voltage




Figure 3. Reset Output Voltage versus Input Voltage




Figure 4. Comparator Threshold Voltage versus Temperature




Figure 5. Input Current versus Input Voltage

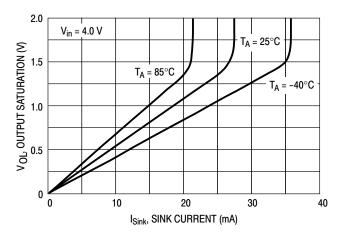


Figure 6. Reset Output Saturation versus Sink Current




Figure 7. Reset Delay Time




Figure 8. Clamp Diode Forward Current versus Voltage


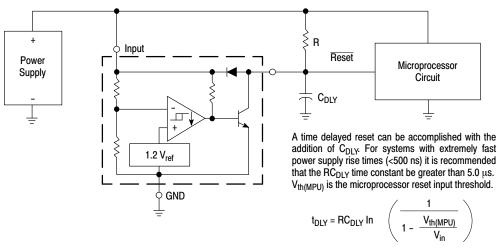


Figure 9. Low Voltage Microprocessor Reset

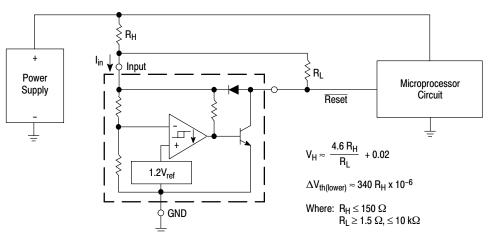


Comparator hysteresis can be increased with the addition of resistor  $R_H.$  The hysteresis equation has been simplified and does not account for the change of input current  $l_{in}$  as  $V_{CC}$  crosses the comparator threshold (Figure 4). An increase of the lower threshold  $\Delta V_{th(lower)}$  will be observed due to  $l_{in}$  which is typically 340  $\mu A$  at 4.59 V. The equations are accurate to  $\pm 10\%$  with  $R_H$  less than 150  $\Omega$  and  $R_L$  between 1.5  $k\Omega$  and 10  $k\Omega$ .

TEST DATA

V <sub>H</sub> (mV)	ΔV <sub>th</sub> (mV)	R <sub>H</sub> (Ω)	R <sub>L</sub> (kΩ)
20	0	0	0
51	3.4	10	1.5
40	6.8	20	4.7
81	6.8	20	1.5
71	10	30	2.7
112	10	30	1.5
100	16	47	2.7
164	16	47	1.5
190	34	100	2.7
327	34	100	1.5
276	51	150	2.7
480	51	150	1.5

Figure 10. Low Voltage Microprocessor Reset with Additional Hysteresis



Hand Input

Reset

Solar Cells

GND

Figure 11. Voltage Monitor

Figure 12. Solar Powered Battery Charger


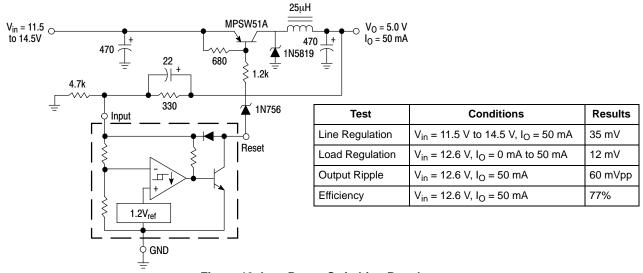


Figure 13. Low Power Switching Regulator

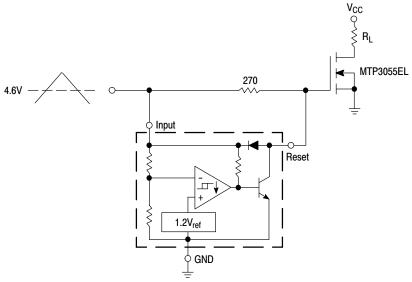

Overheating of the logic level power MOSFET due to insufficient gate voltage can be prevented with the above circuit. When the input signal is below the 4.6 V threshold of the MC34064, its output grounds the gate of the  $L^2$  MOSFET.

Figure 14. MOSFET Low Voltage Gate Drive Protection


#### **ORDERING INFORMATION**

Device	Operating Temperature Range	Package	Shipping <sup>†</sup>
MC34064D-5G		SOIC-8 (Pb-Free)	98 Units / Rail
MC34064D-5R2G		SOIC-8 (Pb-Free)	2500 Units/ Tape & Reel
MC34064DM-5R2G		Micro8 (Pb-Free)	4000 Units / Tape & Reel
MC34064P-5G		TO-92 (Pb-Free)	2000 Units / Bag
MC34064P-5RAG	$T_A = 0$ °C to +70°C	TO-92 (Pb-Free)	2000 Units / Tape & Reel
MC34064P-5RPG		TO-92 (Pb-Free)	2000 Units / Ammo Pack
MC34064P-5RMG		TO-92 (Pb-Free)	
MC34064SN-5T1G		TSOP-5 (Pb-Free)	3000 Units / Tape & Reel
MC33064D-5G		SOIC-8 (Pb-Free)	98 Units / Rail
MC33064D-5R2G		SOIC-8 (Pb-Free)	2500 Units / Tape & Reel
MC33064DM-5R2G		Micro8 (Pb-Free)	4000 Units / Tape & Reel
MC33064P-5G	$T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 Units / Bag
MC33064P-5RAG		TO-92 (Pb-Free)	2000 Units / Tape & Reel
MC33064P-5RPG		TO-92 (Pb-Free)	2000 Units / Ammo Pack
MC33064SN-5T1G		TSOP-5 (Pb-Free)	3000 Units / Tape & Reel
NCV33064D-5R2G*		SOIC-8 (Pb-Free)	2500 Units / Tape & Reel
NCV33064P-5RAG*		TO-92 (Pb-Free)	2000 Units / Tape & Reel
NCV33064P-5RPG*	$T_A = -40^{\circ}\text{C to } +125^{\circ}\text{C}$	TO-92 (Pb-Free)	2000 Units / Ammo Pack
NCV33064DM-5R2G*		Micro8 (Pb-Free)	4000 Units / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, pleaserefer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.
\*NCV33064: Tlow = -40°C, Thigh = +125°C. Guaranteed by design. NCV prefix is for automotive and other applications requiring site and

change control.

#### **MARKING DIAGRAMS**

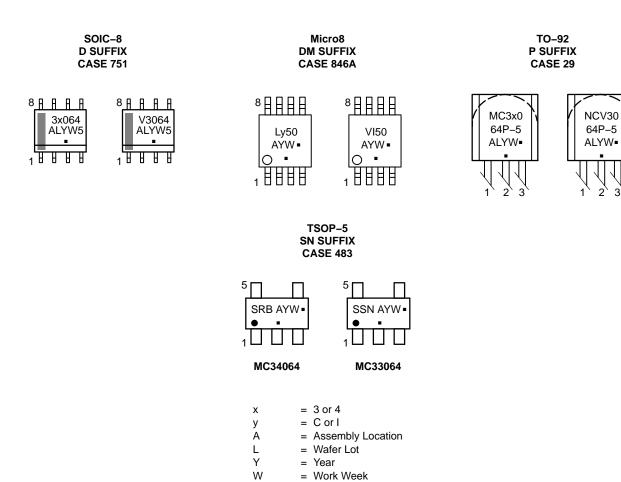


(Note: Microdot may be in either location)

= Pb-Free Package

#### **PACKAGE DIMENSIONS**

#### SOIC-8 **D SUFFIX** CASE 751-07 **ISSUE AK**

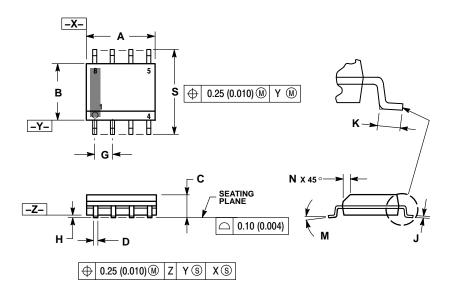


- NOTES:
  1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.

- CONTROLLING DIMENSION: MILLIMETER:
   DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
   MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
- PER SIDE.
  DIMENSION D DOES NOT INCLUDE DAMBAR
  PROTRUSION. ALLOWABLE DAMBAR
  PROTRUSION SHALL BE 0.127 (0.005) TOTAL
  IN EXCESS OF THE D DIMENSION AT
  MAXIMUM MATERIAL CONDITION.
  751–01 THRU 751–06 ARE OBSOLETE. NEW
  STANDARD IS 751–07.

	MILLIMETERS		INC	HES
DIM	MIN	MAX	MIN	MAX
Α	4.80	5.00	0.189	0.197
В	3.80	4.00	0.150	0.157
С	1.35	1.75	0.053	0.069
D	0.33	0.51	0.013	0.020
G	1.27 BSC		0.050 BSC	
н	0.10	0.25	0.004	0.010
J	0.19	0.25	0.007	0.010
K	0.40	1.27	0.016	0.050
М	0 °	8 °	0 °	8 °
N	0.25	0.50	0.010	0.020
S	5.80	6.20	0.228	0.244

#### **SOLDERING FOOTPRINT\***





 $\left(\frac{\text{mm}}{\text{inches}}\right)$ SCALE 6:1

<sup>\*</sup>For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

#### **PACKAGE DIMENSIONS**

#### Micro8 **DM SUFFIX** CASE 846A-02 **ISSUE J**





- IOTES:

  1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

  2. CONTROLLING DIMENSION: MILLIMETER.


  3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.

  4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.

  5. 846A-01 OBSOLETE, NEW STANDARD 846A-02.

	MILLIMETERS			INCHES		
DIM	MIN	NOM	MAX	MIN	NOM	MAX
Α			1.10			0.043
A1	0.05	0.08	0.15	0.002	0.003	0.006
b	0.25	0.33	0.40	0.010	0.013	0.016
С	0.13	0.18	0.23	0.005	0.007	0.009
D	2.90	3.00	3.10	0.114	0.118	0.122
Е	2.90	3.00	3.10	0.114	0.118	0.122
е		0.65 BSC			0.026 BSC	
L	0.40	0.55	0.70	0.016	0.021	0.028
HE	4.75	4.90	5.05	0.187	0.193	0.199

## RECOMMENDED SOLDERING FOOTPRINT\*




DIMENSION: MILLIMETERS

<sup>\*</sup>For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

#### PACKAGE DIMENSIONS

#### TSOP-5 **SN SUFFIX CASE 483** ISSUE M

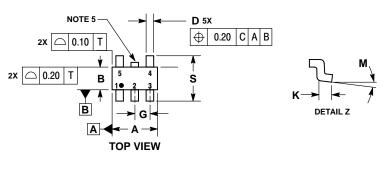



#### NOTES:

- NOTES:

  1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.


  2. CONTROLLING DIMENSION: MILLIMETERS.

  3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

  4. DIMENSIONS A AND B DO NOT INCLUDE MOLD BE ASH DEPOTBLISIONS OR CATER BLURSS MOLD.
- DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE. DIMENSION A. OPTIONAL CONSTRUCTION: AN ADDITIONAL TRIMMED LEAD IS ALLOWED IN THIS LOCATION. TRIMMED LEAD NOT TO EXTEND MORE THAN 0.2 FROM BODY.

	MILLIMETERS			
DIM	MIN	MAX		
Α	2.85	3.15		
В	1.35	1.65		
С	0.90	1.10		
D	0.25 0.50			
G	0.95 BSC			
Н	0.01	0.10		
J	0.10	0.26		
K	0.20 0.60			
М	0° 10°			
S	2 50	3.00		


#### **SOLDERING FOOTPRINT\***



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

#### PACKAGE DIMENSIONS

TO-92 (TO-226) **P SUFFIX** CASE 29-11 **ISSUE AM** 




STRAIGHT LEAD **BULK PACK** 



- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: INCH. CONTOUR OF PACKAGE BEYOND DIMENSION R
- IS UNCONTROLLED.
  LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

	INCHES		MILLIN	IETERS
DIM	MIN	MAX	MIN	MAX
Α	0.175	0.205	4.45	5.20
В	0.170	0.210	4.32	5.33
С	0.125	0.165	3.18	4.19
D	0.016	0.021	0.407	0.533
G	0.045	0.055	1.15	1.39
Н	0.095	0.105	2.42	2.66
J	0.015	0.020	0.39	0.50
K	0.500		12.70	
L	0.250		6.35	-
N	0.080	0.105	2.04	2.66
P		0.100		2.54
R	0.115		2.93	
V	0.135		3.43	



**BENT LEAD** TAPE & REEL AMMO PACK



#### NOTES

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
- CONTROLLING DIMENSION: MILLIMETERS.
  CONTOUR OF PACKAGE BEYOND
  DIMENSION R IS UNCONTROLLED.
- LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM

	MILLIMETERS		
DIM	MIN	MAX	
Α	4.45	5.20	
В	4.32	5.33	
С	3.18	4.19	
D	0.40	0.54	
G	2.40	2.80	
7	0.39	0.50	
K	12.70		
N	2.04	2.66	
P	1.50	4.00	
R	2.93		
V	3.43		

#### Micro8 is a trademark of International Rectifier.

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="https://www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability. arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.

Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative