SML-D12x1 Series

Data Sheet

■ Features

ullet I_V rank reduction products

■Outline



■Size


1608 (0603) 1.6×0.8 mm (t=0.55mm)



■ Dimensions

RO. 275 Tolerance: ± 0.1 (unit: mm)

■ Recommended Solder Pattern



■ Specifications


			Abso	olute Ma	ximum R	Ratings (Ta=25	°C)			Electr	ical and	d Optica	al Chara	acteristi	cs (Ta=	(Ta=25°C)								
Part No.		Emitting Chip Structure	Power	Forward	Peak Forward			Operating Temp. Storage Temp.		Forward Voltage V _F Reverse Current		Current I _R	Dominant Wavelength λ_{D}			th λ _D	Luminous Intensity I _V							
r dit ivo.			Dissipation	Current	Current			Otorago romp.	Тур.	I _F	Max.	V_R	Min.*2	Тур.	Max.*2	I _F	Min.	Тур.	I _F					
			P _D (mW)	I _F (mA)	I _{FP} (mA)	$V_R(V)$	T _{opr} (°C)	T _{stg} (°C)	(V)	(mA)	(µA)	(V)	(nm)	(nm)	(nm)	(mA)	(mcd)	(mcd)	(mA)					
SML-D12V1W		Red						-40 ∼ +100					625	630	635		25	40						
SML-D12U1W		Rea							0 2.2 20				615	620	625		40	63						
SML-D12D1W	AlGalnP	Orange	54	20	100* ¹	5	-40 ∼ 85			2.2 20	10	5	602	605	608	20	63	100	20					
SML-D12Y1W		Yellow											587	590	593	1	63							
SML-D12M1W		Yellowish green											569	572	575		16	30						

^{*1:}Duty1/10, 1kHz *2:Measurement tolerance: ±1nm

■ Electrical Characteristics Curves


Reference

Fig.1 Forward Current
- Forward Voltages




FORWARD VOLTAGE: V_F [V]

Fig.2 Luminous Intensity - Atmosphere Temperature




ATMOSPHERE TEMPERATURE : Ta [°C]

Fig.3 Luminous Intensity - Forward Current



FORWARD CURRENT : I_F [mA]


Fig.4 Derating



AMBIENT TEMPERATURE: Ta [°C]

■ Viewing Angle

Reference

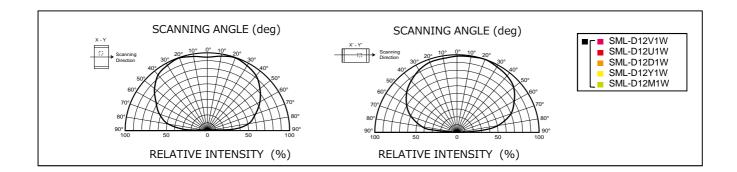

■ Rank Reference of Brightness*

*Measurement tolerance: ±10%

Red (V, U)		$Ta=25^{\circ}C, I_{F}=20mA)$
1100 () , 0	λ	1 a - 23 C, IF - 2011A)

Rank	J	K	L	М	N	Р	Q	R	S
lv (mcd)	2.5~4.0	4.0~6.3	6.3~10	10~16	16~25	25~40	40~63	63~100	100~160
SML-D12V1W									
SML-D12U1W									

Orange(D))						(Ta=2	25°C, I _F =20mA)
_	-	17		N.I.	_	•	1	_

Rank	J	K	L	М	N	Р	Q	R	S
lv (mcd)	2.5~4.0	4.0~6.3	6.3~10	10~16	16~25	25~40	40~63	63~100	100~160
SML-D12D1W									

Yellow (Y) $(Ta=25^{\circ}C, I_F=20mA)$


Rank	J	K	L	М	N	Р	Q	R	S
lv (mcd)	2.5~4.0	4.0~6.3	6.3~10	10~16	16~25	25~40	40~63	63~100	100~160
SML-D12Y1W									


Yellowish Green(M)

 $(Ta=25^{\circ}C, I_F=20mA)$

	. ,								
Rank	J	K	L	М	N	Р	Q	R	S
lv (mcd)	2.5~4.0	4.0~6.3	6.3~10	10~16	16~25	25~40	40~63	63~100	100~160
SML-D12M1W									

■ Taping(T86)

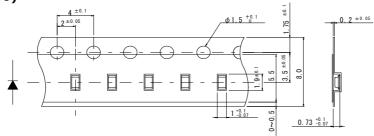




Unit:mm

Note)Tolerance is within ±0.2mm unless otherwise specified.

■ Part No. Construction

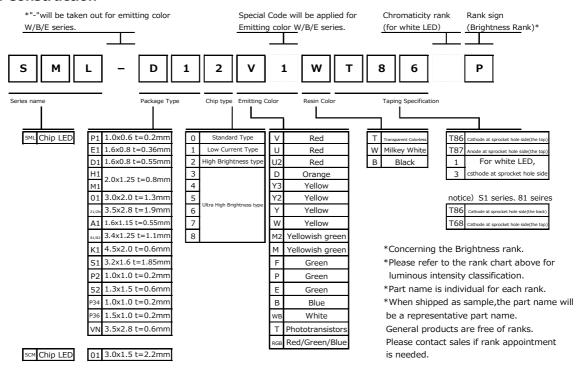

■ Packing Specification

ROHM LED products are being shipped with desiccant (silica gel) included in moisture-proof bags. Pasting the moisture sensitive label on the outer surface of the moisture-proof bags or enclosing the humidity indication card inside the bag is available upon request. Please contact the nearest sales office or distributer if necessary.

■ Precaution (Surface Mount Device)

1. Storage

If the product is heated during the reflow under the condition of hygroscopic state, it may vaporize and expand which will influence the performance of the product. Therefore, the package is waterproof. Please use the product following the conditions:

Using Conditions

Classification	Temperature	Humidity	Expiration Date	Remark
①Before using	5~30℃	30~60%RH	Within 1 year from Receiving	Storage with waterproof package
②After opening package	5~30℃	Below 60%RH	Within 168h	Please storing in the airtight container with our desiccant (silica gel)

Baking

Bake the product in case of below:

- 1) The expiration date is passed.
- ②The indicator of HIC(Humidity Indicator Card) become discolored immediately after the MBB is opened.
- ③The color of indicator (silica gel) turned from blue to colorless or from green to pink. (Even if the product is within the expiration date.)

Baking Conditions

Tempera	,					
60±3°	±3℃ 12~24h		Below 20%RH			
Remark	·Reel and so please	ducts in reel. embossed tape try not to apply end bake once.	are easy to be deformed when baking, stress on it.			

2. Application Methods

2 – 1. Precaution for Drive System and Off Mode

Design the circuit without the electric load exceeding the ABSOLUTE MAXIMUM RATING that applies on the products. If drive by constant voltage, it may cause current deviation of the LED and result in deviation of luminous intensity, so we recommend to drive by constant current. (Deviation of VF Value will cause deviation of current in LED.) Furthermore, for off mode, please do not apply voltage neither forward nor reverse. Especially, for the products with the Ag-paste used in the die bonding, there's high possibility to cause electro migration and result in function failure.

2 - 2. Derating

The Derating Characteristics are based on the lifetime of luminous intensity and assumption of degradation & color change of sealing resin or reflector. About its reliability, please evaluate its using conditions and environment and use it after confirmed there is no problem.

2 – 3. Operation Life Span

There's possibility for intensity of light drop according to working conditions and environments (applied current, surrounding temperature and humidity, corrosive gases), please call our Sales staffs for inquiries about the concerned application below.

- ①Longtime intensity of light life
- 20n mode all the time

2 – 4. Applied Stress on Product

The mold resin of this LED is not hard, because of No resin hardening agent such as filler. Therefore, please pay attention to the overstress on it which may influence its reliability.

<u>2 – 5. Usage</u>

The Product is LED. We are not responsible for the usage as the diode such as Protection Chip, Rectifier, Switching and so on. The product is designed and manufactured for application in ordinary electronic equipment, so that we do not guarantee the usage in devices requiring extremely high reliability (such as car equipment, medical equipment, traffic equipment, aircraft etc.).

3. Others

3 – 1. Surrounding Gas

Notice that if it is stored under the condition of acid gas (chlorine gas, sulfured gas) or alkali gas (ammonia), it may result in low soldering ability (caused by the change in quality of the plating surface) or optical characteristics changes (light intensity, chrominance) and change in quality of cause die bonding (Ag-paste) materials. All of the above will function failure of the products.

Therefore, please pay attention to the storage environment for mounted product (concern the generated gas of the surrounding parts of the products and the atmospheric environment).

3 – 2. Electrostatic Damage

The product is part of semiconductor and electrostatic sensitive, there's high possibility to be damaged by the electrostatic discharge. Please take appropriate measures to avoid the static electricity from human body and earthing of production equipment. The resistance values of electrostatic discharge (actual values) vary with products, therefore, please call our Sales staffs for inquiries.

3 – 3. Electromagnetic Wave

Applications with strong electromagnetic wave such as, IH cooker, will influence the reliability of LED, please refrain from it. Otherwise, there is no guarantee for product quality.

4. Mounting

4 - 1. Soldering

•No resin hardening agent such as filler is used in the sealing resin of the product. Therefore, resin expansion and moisture absorption at humidity will cause heat stress during soldering process and finally has bad influence on the product's reliability.

- •The product is not for flow soldering.
- •Do not expose the product in the environment of high temperature (over 100° C) or rapid temperature shift (within 3° C of temperature gradient) during the flow soldering of surrounding parts.
- •Please set appropriate reflow temperature based on our product usage conditions and specification.
- •The max for reflowing is 2 times, please finish the second reflow soldering and flow soldering with other parts within the usage limitation after open the moisture proof package.
- •Compare with N2 reflow, during air reflow, because of the heat and surrounding conditions, it may cause the discoloration of the resin.


4 – 2. Automatic Mounting

Vibration may result in low mounting rate since it will cause the static electricity of product and adhere to top cover tape. We recommend to

- ·set magnet on parts feeder cassette of the mounter to control the product stabilization
- set ionizer to prevent electrostatic charge

4 - 3. Mounting Location

The stress like bending stress of circuit board dividing after mounting, may cause LED package crack or damage of LED internal junction, therefore, please concern the mounting direction and position to avoid bending or screwing with great stress of the circuit board.



Stress strength according to he mounting position: A>B>C>D

4-4. Mechanical Stress after Mounting

The mechanical stress may damage the LED after Circuit Mounting, so please pay attention to the touch on product.


4 – 5. Soldering Pattern for Recommendation

We recommend the soldering pattern that shows on the right. It will be different according to mounting situation of circuit board, therefore, please concern before designing.

**The product has adopted the electrode structure that it should solder with back electrode of the product.

Thus, please be informed that the shape of electrode pin of solder fillet formation is not guaranteed.

The through hole on electrode surface is for conduction of front and rear electrodes but not for formation of solder fillet.




4 - 6. Reflow Profile

For reflow profile, please refer to the conditions below:(%)

■ Meaning of marks, Conditions

	or marke, conditions	
Mark	Meanings	Conditions
Ts _{max}	Maximum of pre-heating temperature	180℃
Ts _{min}	Minimum of pre-heating temperature	140℃
t _s	Time from Tsmin to Tsmax	Over 60sec.
T_L	Reference temperature	230~260℃
t∟	Retention time for TL	Within 40sec.
T _P	Peak temperature	260°C(Max)
t_{P}	Time for peak temperature	Within 10sec.
$\Delta T_R/\Delta t$	Temperature rising rate	Under 3℃/sec.
ΔT _D /Δt	Temperature decreasing rate	Over -3℃/sec.



*Above conditions are for reference. Therefore, evaluate by customer's own circuit boards and reflow furnaces before using, because stress from circuit boards and temperature variations of reflow furnaces vary by customer's own conditions.

4 – 7. Attention Points in Soldering Operation

This product was developed as a surface mount LED especially suitable for reflow soldering. So reflow soldering is recommended. In case of implementing manual soldering, please take care of following points.

1SOLDER USED

Sn-Cu, Sn-Ag-Cu, Sn-Ag-Bi-Cu


2HAND SOLDERING CONDITION

LED products do not contain reinforcement material such as a glass fillers.

So thermal stress by soldering greatly influence its reliability.

Please keep following points for manual soldering.

	ITEM	RECOMMENDED CONDITION
a)	Heating method	Condition) Temp. of iron top less than 400℃ within 3 sec. Heating on PCB pattern, not direct to the LED. (Fig-1)
b)		Please handle after the part temp. goes down to room temp.



4 – 8. Cleaning after Soldering

Please follow the conditions below if the cleaning is necessary after soldering and evaluate sufficiently with your cleaning conditions

Solvent	We recommend to use alcohols solvent such as, isopropyl alcohols
Temperature	Under 30°C within 3 minutes
Ultrasonic Cleaning	15W/Below 1 liter (capacity of tank)
Drying	Under 100℃ within 3 minutes

Notes

- 1) The information contained herein is subject to change without notice.
- Before you use our Products, please contact our sales representative and verify the latest specifications:
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors. Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Poducts beyond the rating specified by ROHM
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products are intended for use in general electronic equipment (i.e. AV/OA devices, communication, consumer systems, gaming/entertainment sets) as well as the applications indicated in this document.
- 7) The Products specified in this document are not designed to be radiation tolerant.
- 8) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.
- 9) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 10) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 11) ROHM has used reasonable care to ensur the accuracy of the information contained in this document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 12) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.
- 13) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 14) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/



SML-D12D1W - Web Page

Distribution Inventory

Part Number	SML-D12D1W
Package	SML-D12(Iv rank reduction)
Unit Quantity	
Minimum Package Quantity	
Packing Type	
Constitution Materials List	inquiry
RoHS	Yes