
TOSHIBA CMOS Digital Integrated Circuit Silicon Monolithic

# TC4013BP,TC4013BF,TC4013BFN


TC4013B Dual D-Type Flip Flop


TC4013B contains two independent circuits of D type flip-flop. The input level applied to DATA input are transferred to Q and  $\overline{Q}$  output by rising edge of the clock pulse. When SET input is placed at "H", and RESET input is placed at "L", outputs become Q = "H", and  $\overline{Q} =$  "L". When RESET input is placed at "H", and SET input is placed at "L", outputs become Q = "H". When both of RESET input and SET input are at "H", outputs become Q = "H". When both of RESET input and SET input are at "H", outputs become Q = "H".

#### **Pin Assignment**

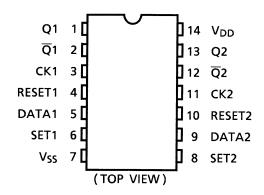

#### **Block Diagram**



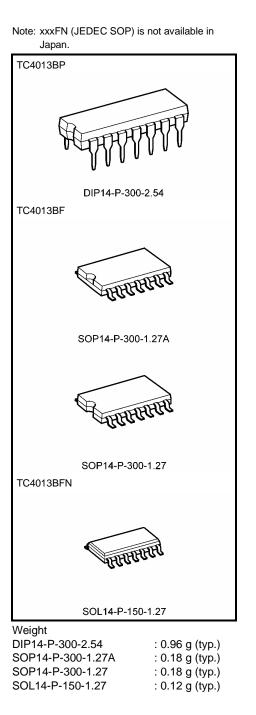

# TOSHIBA

# Truth Table


	Inp	Outputs				
RESET	SET	DATA CKA		Qn + 1	$\overline{Q}n+1$	
L	Н	*	*	н	L	
н	L	*	*	L	Н	
н	Н	*	*	Н	Н	
L	L	L		L	Н	
L	L	н		Н	L	
L	L	*	$\overline{}$	Qn <sup>.</sup>	Qn '	

\*: Don't care

 $\Delta$ : Level change

•: No change

#### Logic Diagram

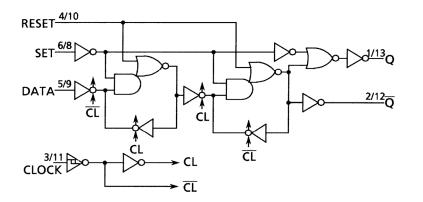

#### **Absolute Maximum Ratings (Note)**

Characteristics	Symbol	Rating	Unit
DC supply voltage	V <sub>DD</sub>	$V_{SS}-0.5V_{SS}+20$	V
Input voltage	VIN	$V_{SS}-0.5\text{-}V_{DD}+0.5$	V
Output voltage	V <sub>OUT</sub>	$V_{SS}-0.5\text{-}V_{DD}+0.5$	V
DC input current	I <sub>IN</sub>	±10	mA
Power dissipation	PD	300 (DIP)/180 (SOIC)	mW
Operating temperature range	T <sub>opr</sub>	-40~85	°C
Storage temperature range	T <sub>stg</sub>	-65~150	°C

Note: Exceeding any of the absolute maximum ratings, even briefly, lead to deterioration in IC performance or even destruction.

## Recommended Operating Conditions (V<sub>SS</sub> = 0 V) (Note)

Characteristics	Symbol	Test Condition	Min	Тур.	Max	Unit
DC supply voltage	V <sub>DD</sub>	—	3	_	18	V
Input voltage	V <sub>IN</sub>	_	0	_	V <sub>DD</sub>	V

Note: The recommended operating conditions are required to ensure the normal operation of the device. Unused inputs must be tied to either VCC or GND.

# Static Electrical Characteristics ( $V_{SS} = 0 V$ )

Characteristics Symbol		Svm-	Test Condition	-40°C		25°C			85°C			
			V <sub>DD</sub> (V)	Min	Max	Min	Тур.	Max	Min	Max	Unit	
			I <sub>OUT</sub>   < 1 μA	5	4.95	_	4.95	5.00	_	4.95	_	
High-level output voltage	VOH	10		9.95	—	9.95	10.00	_	9.95	_	V	
· · · · · · · · · · · · · · · · · · ·			$V_{IN} = V_{SS}, \ V_{DD}$	15	14.95	_	14.95	15.00	_	14.95	_	
			I <sub>OUT</sub>   < 1 μΑ	5	_	0.05	_	0.00	0.05		0.05	
Low-level voltage	output	V <sub>OL</sub>		10	_	0.05	_	0.00	0.05	—	0.05	V
			$V_{IN} = V_{SS}, V_{DD}$	15	_	0.05	—	0.00	0.05	—	0.05	
			$V_{OH} = 4.6 V$	5	-0.61	_	-0.51	-1.0	_	-0.42	_	mA
			$V_{OH} = 2.5 V$	5	-2.50	_	-2.10	-4.0	_	-1.70	_	
Output hig	h current	IOH	$V_{OH} = 9.5 V$	10	-1.50	_	-1.30	-2.2	_	-1.10	_	
			V <sub>OH</sub> = 13.5 V	15	-4.00	—	-3.40	-9.0	_	-2.80	_	
			$V_{IN} = V_{SS}, \ V_{DD}$									
			$V_{OL} = 0.4 V$	5	0.61	_	0.51	1.2	_	0.42	_	mA
Output lov	ourropt		$V_{OL} = 0.5 \ V$	10	1.50	—	1.30	3.2	_	1.10	_	
Output low current	I <sub>OL</sub>	$V_{OL} = 1.5 \ V$	15	4.00	_	3.40	12.0	_	2.80	_	mA	
			$V_{IN} = V_{SS}, \ V_{DD}$									
		VIH	$V_{OUT} = 0.5 V, 4.5 V$	5	3.5	_	3.5	2.75	_	3.50	_	V
lanut biada	veltere		$V_{OUT} = 1.0 V, 9.0 V$	10	7.0	—	7.0	5.50	_	7.00	_	
Input high	voitage		$V_{OUT} = 1.5 V, 13.5 V$	15	11.0	—	11.0	8.25	_	11.00	_	
			I <sub>OUT</sub>   < 1 μA									
			$V_{OUT} = 0.5 V, 4.5 V$	5		1.5		2.25	1.5		1.5	
In most large			$V_{OUT} = 1.0 V, 9.0 V$	10	—	3.0	_	4.50	3.0		3.0	
Input low voltage	VIL	$V_{OUT} = 1.5 V, 13.5 V$	15	—	4.0	_	6.75	4.0		4.0	V	
			$ I_{OUT}  < 1 \ \mu A$									
Input current	"H" level	IIH	V <sub>IH</sub> = 18 V	18	_	0.1	_	10 <sup>-5</sup>	0.1	_	1.0	
	"L" level	١ <sub>١L</sub>	$V_{IL} = 0 V$	18	_	-0.1		-10 <sup>-5</sup>	-0.1		-1.0	μA
Quiescent supply current				5		1		0.002	1	_	30	
		I <sub>DD</sub>	$V_{IN} = V_{SS}, V_{DD}$	10	—	2		0.004	2		60	μA
			(Note)	15	—	4	—	0.008	4		120	


Note: All valid input combinations.

# Dynamic Electrical Characteristics (Ta = 25°C, $V_{SS}$ = 0 V, C<sub>L</sub> = 50 pF)


Characteristics	Symbol	Test Condition		Min	Тур.	Max	Unit
Characteristics	Gymbol		V <sub>DD</sub> (V)	IVIIII	тур.	Wax	Onit
Output transition time			5	—	70	200	
(low to high)	t <sub>TLH</sub>	_	10	—	35	100	ns
			15	_	30	80	
Output transition time			5	—	70	200	
(high to low)	tTHL	—	10	—	35	100	ns
			15	_	30	80	
Propagation delay time	+		5	—	130	300	ns
$(CK-Q, \overline{Q})$	t <sub>pLH</sub>	_	10	—	65	130	
(01-0, 0)	<sup>t</sup> pHL		15	_	50	90	
Propagation delay time			5	_	110	300	ns
(SET, RESET-Q, $\overline{Q}$ )	<sup>t</sup> pLH	—	10	—	50	130	
(SET, RESET-Q, Q)			15	_	40	90	
Propagation delay time			5	_	110	300	
(SET, RESET-Q, $\overline{Q}$ )	t <sub>pHL</sub>	—	10	—	50	130	ns
(SEI, RESEI-Q, Q)			15	—	40	90	
			5	3.5	8	_	
Max clock frequency	f <sub>CL</sub>	_	10	8.0	16		MHz
			15	12.0	20		
Manual and the disc		_	5	No limit			μs
Max clock input rise time	t <sub>rCL</sub>		10				
Max clock input fall time	tfCL		15				
Min mode a suiddle	t <sub>W</sub>		5	_	60	180	ns
Min pulse width		_	10	_	30	80	
(SET, RESET)			15	_	25	50	
			5	_	60	140	
Min clock pulse width	tw	_	10	_	30	60	ns
			15	—	25	40	
Min and sup time.			5			40	
Min set-up time	t <sub>su</sub>	_	10	_	_	20	ns
(DATA-CK)			15	_		15	
			5	_	20	40	
Min hold time	t <sub>H</sub>	_	10	_	10	20	ns
(DATA-CK)			15	_	6	15	
<b>N</b> <sup>2</sup> 1.2			5	_		40	1
Min removal time	t <sub>rem</sub>	_	10	_	_	20	ns
(SET, RESET-CK)			15			15	
Input capacitance	C <sub>IN</sub>	_			5	7.5	pF

## Waveform for Measurement of Dynamic Characteristics



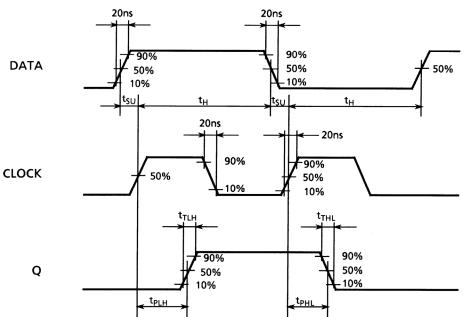


Waveform 2

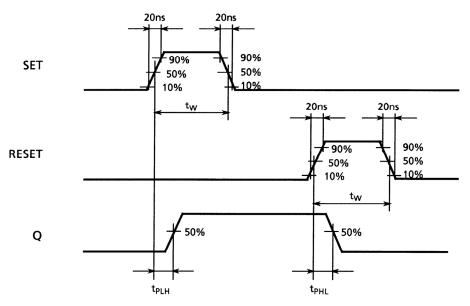

## Package Dimensions


DIP14-P-300-2.54

Unit : mm

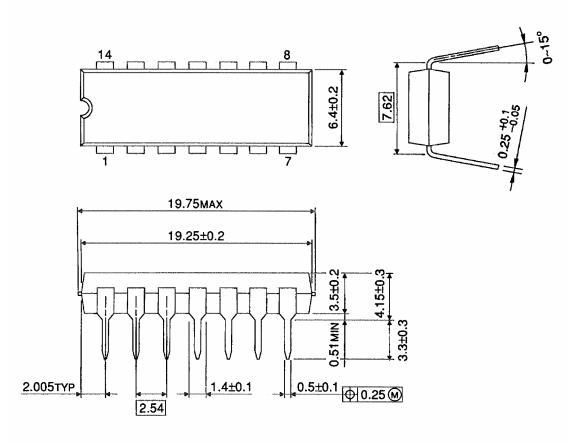


Weight: 0.96 g (typ.)

#### **Package Dimensions**

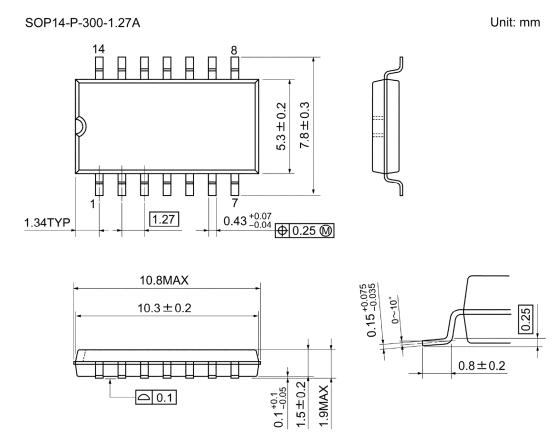


Weight: 0.18 g (typ.)

# Package Dimensions

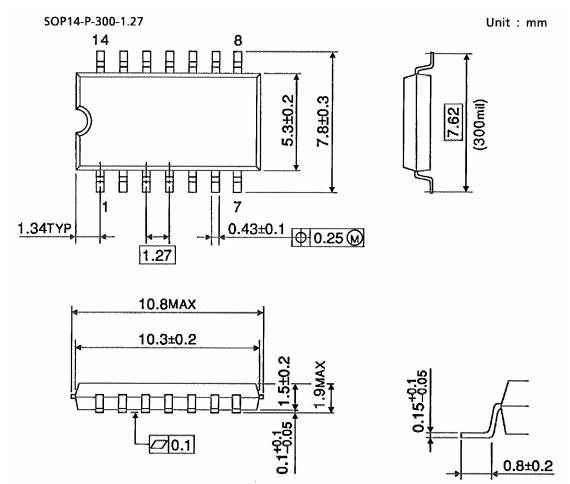

Weight: 0.18 g (typ.)

## Package Dimensions (Note)

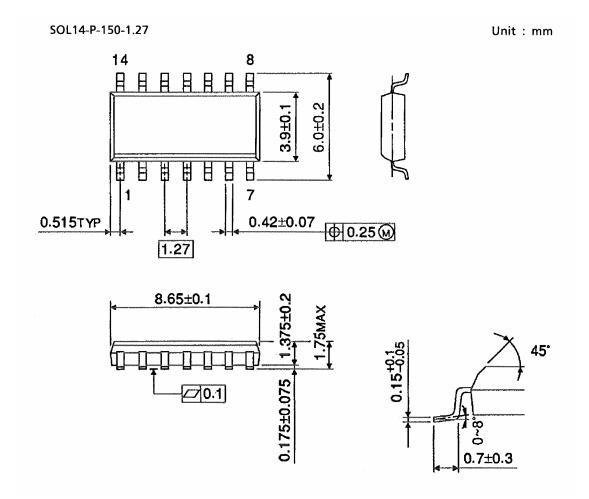

Note: This package is not available in Japan.

Weight: 0.12 g (typ.)

Note: Lead (Pb)-Free Packages DIP14-P-300-2.54 SOP14-P-300-1.27A SOL14-P-150-1.27

#### **RESTRICTIONS ON PRODUCT USE**

Handbook" etc. 021023\_A

060116EBA

- The information contained herein is subject to change without notice. 021023\_D
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
  In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability

• The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk. 021023 B

- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations. 060106\_Q
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others. 021023\_C
- The products described in this document are subject to the foreign exchange and foreign trade laws. 021023\_E