TOSHIBA CMOS Digital Integrated Circuit Silicon Monolithic

TC4049BP,TC4049BF,TC4049BFN, TC4050BP,TC4050BF,TC4050BFN


TC4049B Hex Buffer/Converter (inverting type)
TC4050B Hex Buffer/Converter (non-inverting type)

TC4049B, TC4050B contain six circuits of buffers. TC4049B is inverter type and TC4050B is non-inverter type.

Since one TTL or DTL can be directly driven having large output current, these are useful for interfacing from CMOS to TTL or DTL. As voltage up to VSS + 18 volts can be applied to the input regardless of VDD, these can be also used as the level converter IC's which converts CMOS logical circuits of 15 volts or 10 volts system to CMOS/TTL logical circuits of 5 volts system.

Ideal switching characteristic has been obtained by the circuit diagram of three stage inverters for TC4049B and two stage inverters for TC4050B.

Note: xxxFN (JEDEC SOP) is not available in Japan.

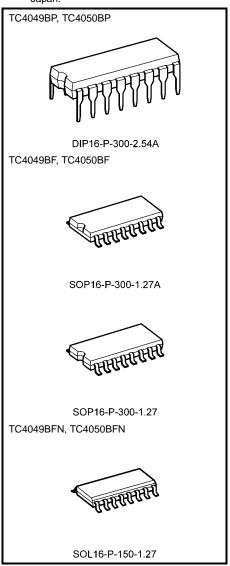


Weight

DIP16-P-300-2.54A : 1.00 g (typ.) SOP16-P-300-1.27A : 0.18 g (typ.) SOP16-P-300-1.27 : 0.18 g (typ.) SOL16-P-150-1.27 : 0.13 g (typ.)




Pin Assignment

TC4049B




TC4050B




Circuit Diagram

1/6 TC4049B

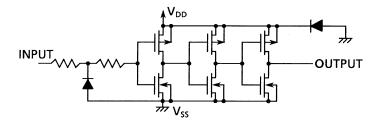

1/6 TC4050B

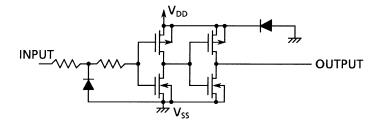

Absolute Maximum Ratings (Note)

Characteristics	Symbol	Rating	Unit
DC supply voltage	V_{DD}	V _{SS} - 0.5~V _{SS} + 20	٧
Input voltage	V _{IN}	$V_{SS} - 0.5 \sim V_{SS} + 20$	V
Output voltage	V _{OUT}	V _{SS} - 0.5~V _{DD} + 0.5	V
DC input current	I _{IN}	±10	mA
Power dissipation	P _D	300 (DIP)/180 (SOIC)	mW
Operating temperature range	T _{opr}	-40~85	°C
Storage temperature range	T _{stg}	-65~150	°C

Note: Exceeding any of the absolute maximum ratings, even briefly, lead to deterioration in IC performance or even destruction.

2



Recommended Operating Conditions (V_{SS} = 0 V) (Note)

Characteristics	Symbol	Test Condition	Min	Тур.	Max	Unit
DC supply voltage	V_{DD}	_	3	_	18	V
Input voltage	V_{IN}	_	0		18	V

Note: The recommended operating conditions are required to ensure the normal operation of the device.
Unused inputs must be tied to either VCC or GND.

Static Electrical Characteristics (V_{SS} = 0 V)

		Sym-	Test Condition		-40°C		25°C		85°C			
Charac	teristics	bol		V _{DD} (V)	Min	Max	Min	Тур.	Max	Min	Max	Unit
High-level voltage	output	V _{OH}	$ I_{OUT} < 1 \mu A$ $V_{IN} = V_{SS}, V_{DD}$	5 10 15	4.95 9.95 14.95		4.95 9.95 14.95	5.00 10.00 15.00		4.95 9.95 14.95		٧
Low-level voltage	output	V _{OL}	$ I_{OUT} < 1 \mu A$ $V_{IN} = V_{SS}, V_{DD}$	5 10 15		0.05 0.05 0.05	_ _ _	0.00 0.00 0.00	0.05 0.05 0.05	_ _ _	0.05 0.05 0.05	V
Output hig	gh current	ІОН	$V_{OH} = 4.6 \text{ V}$ $V_{OH} = 2.5 \text{ V}$ $V_{OH} = 9.5 \text{ V}$ $V_{OH} = 13.5 \text{ V}$ $V_{IN} = V_{SS}, V_{DD}$	5 5 10 15	-0.73 -2.40 -1.80 -4.80		-0.65 -2.10 -1.65 -4.30	-1.2 -3.9 -2.5 -8.0		-0.58 -1.90 -1.35 -3.50		mA
Output lov	v current	I _{OL}	$V_{OL} = 0.4 \text{ V}$ $V_{OL} = 0.5 \text{ V}$ $V_{OL} = 1.5 \text{ V}$ $V_{IN} = V_{SS}, V_{DD}$	5 10 15	3.8 9.6 28.0		3.2 8.0 24.0	6.4 16.0 48.0		2.9 6.6 20.0		mA
Input high voltage		V _{IH}	$V_{OUT} = 0.5 \text{ V}, 4.5 \text{ V} \\ V_{OUT} = 1.0 \text{ V}, 9.0 \text{ V} \\ V_{OUT} = 1.5 \text{ V}, 13.5 \text{ V} \\ I_{OUT} < 1 \mu\text{A}$	5 10 15	3.5 7.0 11.0	_ _ _	3.5 7.0 11.0	2.75 5.50 8.25		3.5 7.0 11.0	— — —	V
Input low voltage		V _{IL}	$V_{OUT} = 0.5 \text{ V}, 4.5 \text{ V}$ $V_{OUT} = 1.0 \text{ V}, 9.0 \text{ V}$ $V_{OUT} = 1.5 \text{ V}, 13.5 \text{ V}$ $ I_{OUT} < 1 \mu\text{A}$	5 10 15		1.5 3.0 4.0	_ _ _	2.25 4.50 6.75	1.5 3.0 4.0	_ _ _	1.5 3.0 4.0	V
Input current	"H" level	I _{IH}	V _{IH} = 18 V V _{IL} = 0 V	18 18	_ _	0.1 -0.1	_	10 ⁻⁵	0.1 -0.1	_	1.0 -1.0	μА
Quiescent current	t supply	I _{DD}	$V_{IN} = V_{SS}, V_{DD}$ (Note)	5 10 15	_ _ _	1 2 4	_ _ _	0.002 0.004 0.008	1 2 4	_ _ _	30 60 120	μА

3

Note: All valid input combinations.




Dynamic Electrical Characteristics (Ta = 25°C, $V_{SS} = 0 V$, $C_L = 50 pF$)

Characteristics		Symbol	Test Condition	Min	Тур.	Max	Unit	
	Characteristics	Symbol		V _{DD} (V)	IVIII I	τyp.	IVIAX	Onit
Output transition time (low to high)				5	_	60	160	
		t _{TLH}	_	10	_	30	80	ns
				15	_	25	60	
Out	out transition time			5	_	120	60	
	n to low)	t _{THL}	_	10	_	10	40	ns
(riigi	1 to low)			15	_	8	30	
	Propagation delay time			5	_	60	120	
_	(low to high)	t _{pLH}	_	10	_	35	65	ns
TC4049B				15	_	30	50	
IC4(Propagation delay time (high to low)			5	_	40	60	
l		t _{pHL}	_	10	_	20	30	ns
				15	_	15	20	
	Propagation delay time (low to high)			5	_	50	130	
TC4050B		t _{pLH}	_	10	_	30	70	ns
				15	_	25	55	
	Propagation delay time (high to low)			5		30	70	
		t _{pHL}	_	10	_	17	35	ns
				15	_	14	25	
Inpu	t capacitance	C _{IN}	_	_			7.5	pF


Waveform for Measurement of Dynamic Characteristics

Waveform

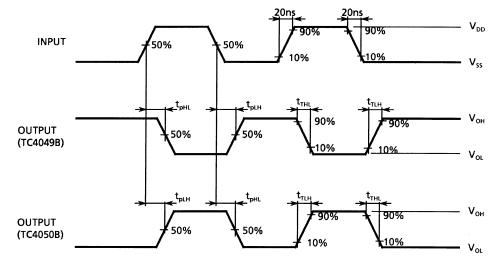


Package Dimensions

DIP16-P-300-2.54A Unit: mm

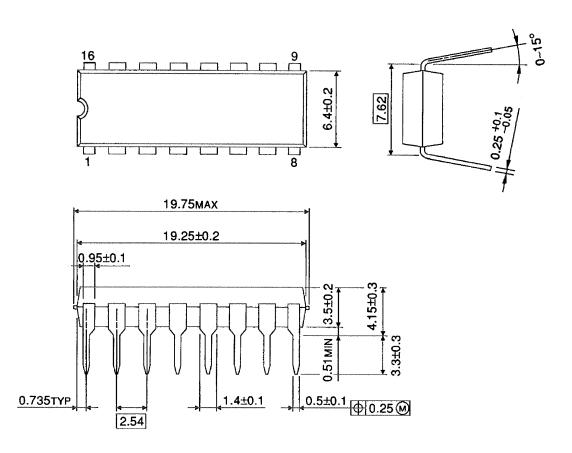


Weight: 1.00 g (typ.)

Package Dimensions

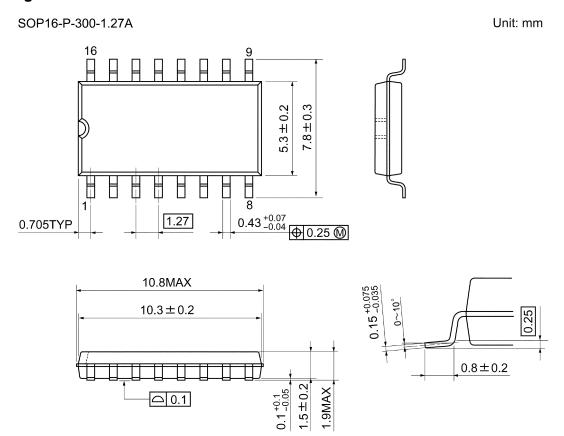

Weight: 0.18 g (typ.)


Package Dimensions

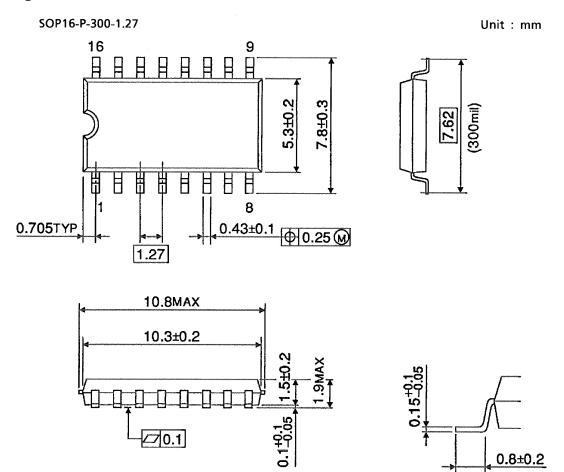

Weight: 0.18 g (typ.)

Package Dimensions (Note)

SOL16-P-150-1.27 Unit: mm

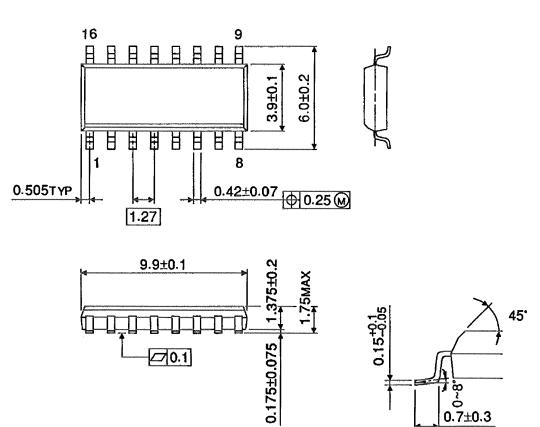

Note: This package is not available in Japan.

Weight: 0.13 g (typ.)

Note: Lead (Pb)-Free Packages

DIP16-P-300-2.54A SOP16-P-300-1.27A SOL16-P-150-1.27

RESTRICTIONS ON PRODUCT USE

060116EBA

- The information contained herein is subject to change without notice. 021023_D
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
 In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc. 021023_A
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk. 021023_B
- The products described in this document shall not be used or embedded to any downstream products of which
 manufacture, use and/or sale are prohibited under any applicable laws and regulations. 060106_Q
- The information contained herein is presented only as a guide for the applications of our products. No
 responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which
 may result from its use. No license is granted by implication or otherwise under any patent or patent rights of
 TOSHIBA or others. 021023_c
- The products described in this document are subject to the foreign exchange and foreign trade laws. 021023_E