


## Printed-circuit board connector - FMC 1,5/ 2-ST-3,5 - 1952267

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Plug component, Nominal current: 8 A, Rated voltage (III/2): 160 V, Number of positions: 2, Pitch: 3.5 mm, Connection method: Spring-cage connection, Color: green, Contact surface: Tin




The figure shows a 10-position version of the product

### Why buy this product

- ✓ User-friendly actuation of the terminal point using a screwdriver
- ✓ Ultra-flat design height of just 7.8 mm
- ✓ Maximum contact and packing density in combination with double-level MCDN(V) 1,5 base strips
- ✓ Wide range of possible combinations with all MC 1,5 base strips with 3.5 or 3.81 mm pitch
- ✓ Fast conductor connection thanks to Push-in spring-cage connection
- ✓ Touch connection for voltage testing using a 1 mm Ø test pin



### Key commercial data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 50 pc                                                                                                   |
| GTIN                                 | <br>4 017918 942854 |
| Weight per Piece (excluding packing) | 1.16 g                                                                                                  |
| Custom tariff number                 | 85366990                                                                                                |
| Country of origin                    | Germany                                                                                                 |

### Technical data

#### Dimensions

|             |         |
|-------------|---------|
| Length      | 22.9 mm |
| Height      | 7.8 mm  |
| Pitch       | 3.5 mm  |
| Dimension a | 3.5 mm  |

#### General

|                             |                |
|-----------------------------|----------------|
| Range of articles           | FMC 1,5/...-ST |
| Insulating material group   | I              |
| Rated surge voltage (III/3) | 2.5 kV         |

# Printed-circuit board connector - FMC 1,5/ 2-ST-3,5 - 1952267

## Technical data

### General

|                                         |                     |
|-----------------------------------------|---------------------|
| Rated surge voltage (III/2)             | 2.5 kV              |
| Rated surge voltage (II/2)              | 2.5 kV              |
| Rated voltage (III/3)                   | 160 V               |
| Rated voltage (III/2)                   | 160 V               |
| Rated voltage (II/2)                    | 320 V               |
| Connection in acc. with standard        | EN-VDE              |
| Nominal current $I_N$                   | 8 A                 |
| Nominal cross section                   | 1.5 mm <sup>2</sup> |
| Maximum load current                    | 8 A                 |
| Insulating material                     | PA                  |
| Inflammability class according to UL 94 | V0                  |
| Internal cylindrical gage               | A1                  |
| Stripping length                        | 10 mm               |
| Number of positions                     | 2                   |

### Connection data

|                                                                            |                      |
|----------------------------------------------------------------------------|----------------------|
| Conductor cross section solid min.                                         | 0.2 mm <sup>2</sup>  |
| Conductor cross section solid max.                                         | 1.5 mm <sup>2</sup>  |
| Conductor cross section stranded min.                                      | 0.2 mm <sup>2</sup>  |
| Conductor cross section stranded max.                                      | 1.5 mm <sup>2</sup>  |
| Conductor cross section stranded, with ferrule without plastic sleeve min. | 0.25 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule without plastic sleeve max. | 1.5 mm <sup>2</sup>  |
| Conductor cross section stranded, with ferrule with plastic sleeve min.    | 0.25 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule with plastic sleeve max.    | 0.75 mm <sup>2</sup> |
| Conductor cross section AWG/kcmil min.                                     | 24                   |
| Conductor cross section AWG/kcmil max                                      | 16                   |
| Minimum AWG according to UL/CUL                                            | 24                   |
| Maximum AWG according to UL/CUL                                            | 16                   |

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |

## Printed-circuit board connector - FMC 1,5/ 2-ST-3,5 - 1952267

### Classifications

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002638 |
| ETIM 5.0 | EC002638 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |

### Approvals

#### Approvals


#### Approvals


UL Recognized / cUL Recognized / GOST / GOST / cULus Recognized

#### Ex Approvals

#### Approvals submitted

#### Approval details

|                                                                                                   |       |       |
|---------------------------------------------------------------------------------------------------|-------|-------|
| UL Recognized  |       |       |
|                                                                                                   | B     | D     |
| mm²/AWG/kcmil                                                                                     | 24-16 | 24-16 |
| Nominal current I <sub>N</sub>                                                                    | 8 A   | 8 A   |
| Nominal voltage U <sub>N</sub>                                                                    | 150 V | 150 V |

|                                                                                                    |       |       |
|----------------------------------------------------------------------------------------------------|-------|-------|
| cUL Recognized  |       |       |
|                                                                                                    | B     | D     |
| mm²/AWG/kcmil                                                                                      | 24-16 | 24-16 |
| Nominal current I <sub>N</sub>                                                                     | 8 A   | 8 A   |
| Nominal voltage U <sub>N</sub>                                                                     | 150 V | 150 V |

## Printed-circuit board connector - FMC 1,5/ 2-ST-3,5 - 1952267

### Approvals



### Accessories

#### Accessories

##### Labeled terminal marker

Marker cards - SK 3,5/2,8:FORTL.ZAHLEN - 0804073



Marker cards, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 99, Mounting type: Adhesive, For terminal block width: 3.5 mm, Lettering field: 3.5 x 2.8 mm

##### Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

##### Terminal marking

Marker cards - SK U/2,8 WH:UNBEDRUCKT - 0803883




Marker cards, Sheet, white, Unlabeled, Can be labeled with: Plotter, Office printing systems, Mounting type: Adhesive, Lettering field: 186 x 2.8 mm


### Drawings

## Printed-circuit board connector - FMC 1,5/ 2-ST-3,5 - 1952267

Diagram

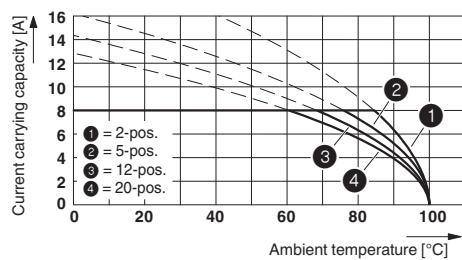

Diagram

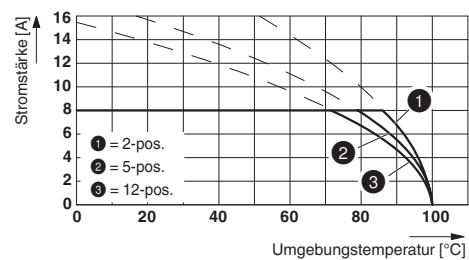

Type: FMC 1,5/...-ST-3,5 with MCV 1,5/...-G-3,5 P26 THR

Dimensioned drawing

