

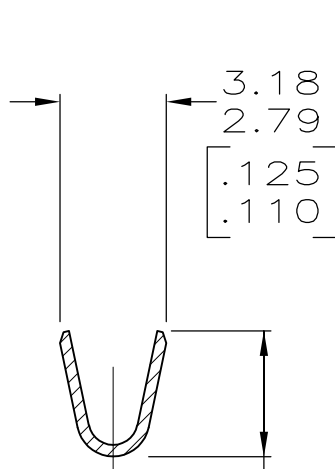
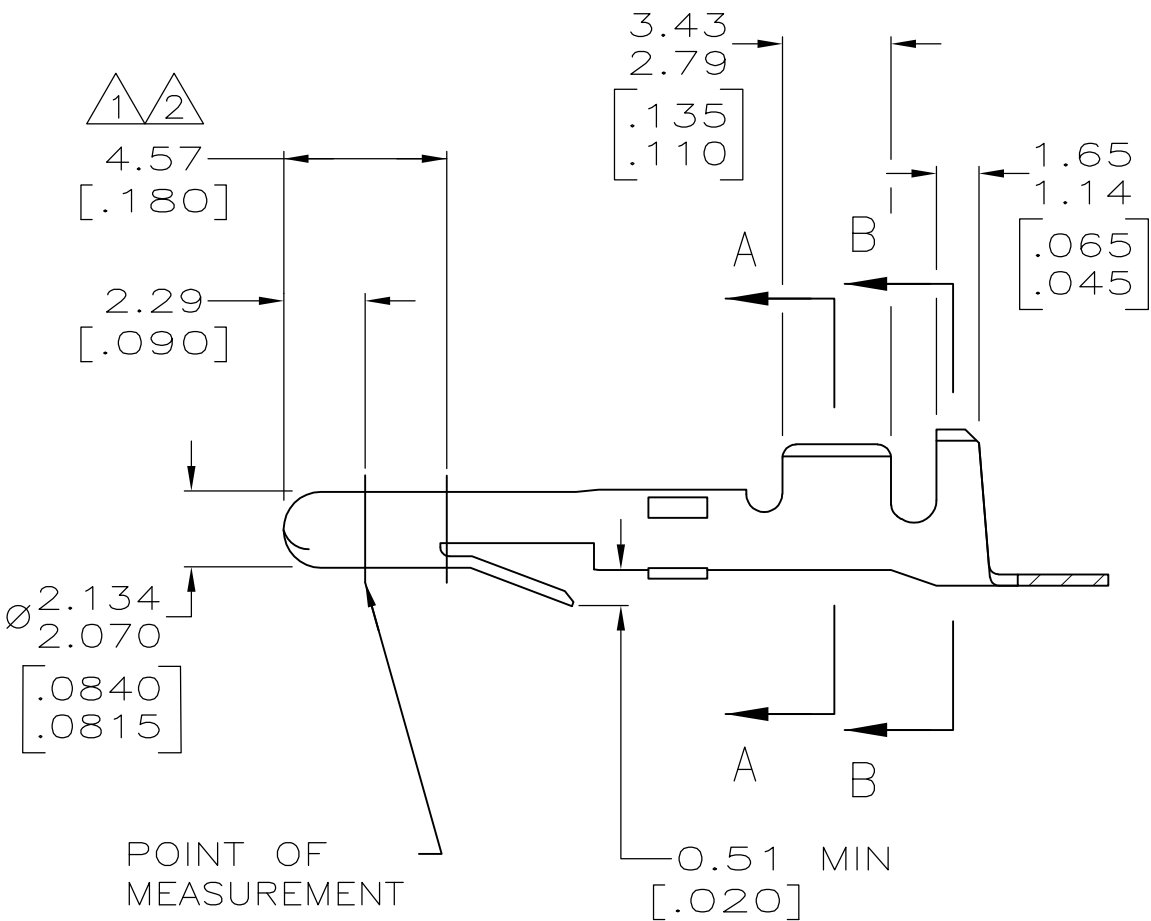


LOC	DIST	REVISIONS				
CM	53	P	LTR	DESCRIPTION	DATE	OWN
			AF1	REVISED PER ECO-11-004587	11MAR11	RK
						HMR

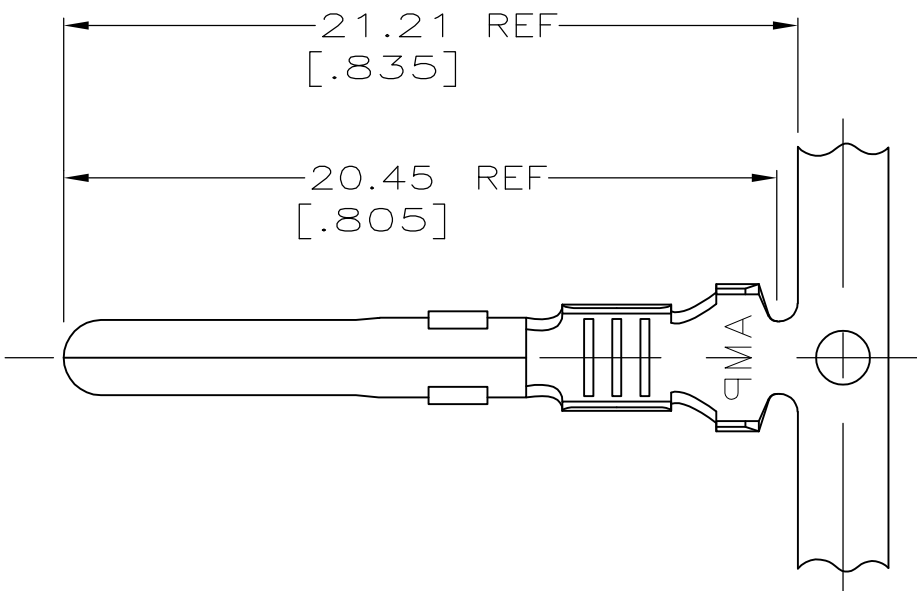

SECTION A-A

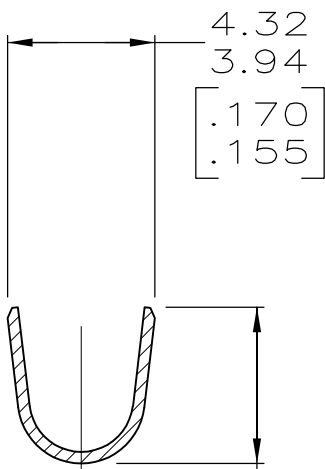

SECTION B-B

METRIC

1. PLATE OVERALL WITH 0.00127 [.000050] MIN NICKEL, THEN TIP PLATE WITH 0.00076 [.000030] MIN GOLD IN THE MATING AREA.
2. PLATE OVERALL WITH 0.00127 [.000050] MIN NICKEL, THEN PLATE IN THE MATING AREA AND STRIPE THE INSIDE OF THE WIRE BARREL WITH 0.00076 [.000030] MIN GOLD.
3. WIRE RANGE: 0.5 – 2 mm² [20 – 14 AWG].
4. INSULATION RANGE: 3.30 [.130] MAX DIA.
5. APPLICATION TYPE: MINI.
6. DIMENSIONS IN BRACKETS ARE IN INCHES.

1	0.33 [.012] BRASS	61118-7
2	0.33 [.012] PH BRZ	61118-6
2	0.33 [.012] BRASS	61118-5
PRE-TIN	0.33 [.012] PH BRZ	61118-4
-	0.33 [.012] BRASS	61118-2
PRE-TIN	0.33 [.012] BRASS	61118-1
FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. BECK	11-20-92	 TE Connectivity									
		CHK R. SWING	11-20-92										
		APVD D. SELF	12-9-92										
DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		PIN, MATE-N-LOK™ —							
	0 PLC	±	—	PRODUCT SPEC									
	1 PLC	±	—	—									
	2 PLC	±	—	APPLICATION SPEC									
	3 PLC	±	0.13 [.005]	—									
	4 PLC	±	—			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO				
MATERIAL	FINISH	WEIGHT		—		A2	00779	C-61118	—				
SEE TABLE		SEE TABLE		CUSTOMER DRAWING				SCALE	5:1	SHEET	1 of 1	REV	AF1