


棒状端子



E42024

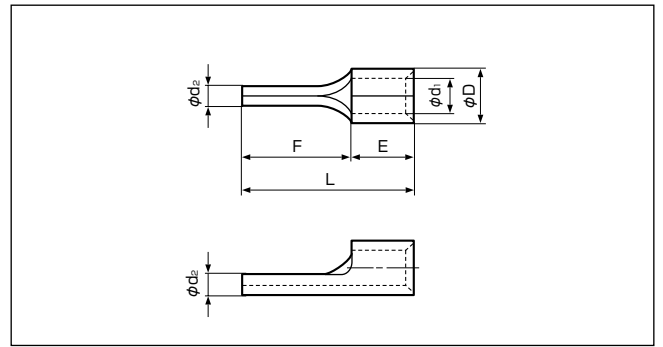


形 番	規 格	寸 法(mm)							適用電線範囲			適用圧着工具			1箱 入数 (個)
		ϕd_2	L	F	E	ϕD	ϕd_1	板厚	単線(mm)	撚線(mm ²)	AWG(#)	手 動	空 気 圧 式	油 圧 式	
TUB-0.5		1.2	14.0	10.0	4.0	2.2	1.0	0.5	0.35~0.7	0.2~0.5	26~22	YHT-2622	YA-1,YA-2,YAT-1A YAT-2A,YAD-1A YAD-2A	BCT-0514	1,000
PC-1.25 F-7		1.9	12.0	7.0	5.0	3.4	1.7	0.8	0.57~1.44	0.25~1.65	22~16	YHT-2210	YA-1,YA-2 YAT-1A,YAT-2A YA-4 YAD-1A,YAD-2A YAT-4A YAD-4A	BCT-0514	1,000
TUB-1.25			17.0	12.0											
PC-2 F-9		1.9	14.0	9.0											
TUB-2			17.0	12.0											
PC-2 F-17			22.0	17.0											
TUB-5.5		2.7	20.0	14.0	6.0	5.7	3.7	1.0	1.82~2.89	2.63~6.64	12~10				500

注1) 100個入をご用意している製品もあります。詳細は弊社までお問い合わせください。 注2) 本製品の中には多少納期を要するものもあります。



板状端子 (AF形)

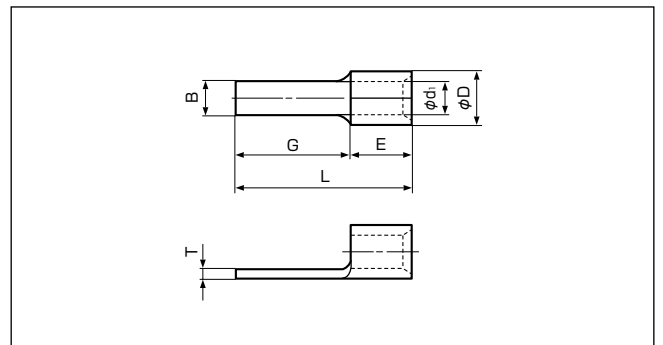

E42024

形 番	規 格	寸 法(mm)							適 用 電 線 範 囲			適 用 圧 着 工 具			1箱 入数 (個)										
		B	L	G	E	φD	φd1	T	単線(mm)	撚線(mm ²)	AWG(#)	手 動	空 気 圧 式	油 圧 式											
1.25-3AF		1.0	14.0	9.8	4.2	3.4	1.7	0.8	0.57~1.44	0.25~1.6	22~16	YHT-2210	YA-1,YA-2 YAT-1A,YAT-2A YA-4 YAD-1A,YAD-2A YAT-4A YAD-4A	BCT-0514	1,000										
1.25-AF2.3B		2.3	15.0	10.0	4.8																				
1.25-AF2.3A			23.0	18.0	4.8																				
1.25-1AF		2.8	13.3	9.0	4.3																				
1.25-2AF		3.4	15.0	10.2	4.8	4.1	2.3	0.8	1.14~1.82	1.04~2.6	16~14					YHT-2210	YA-1,YA-2 YAT-1A,YAT-2A YA-4 YAD-1A,YAD-2A YAT-4A YAD-4A	BCT-0514	1,000						
2-AF2.3A		2.3	23.0	18.0	4.8																				
2-1AF		2.8	13.3	9.0	4.3																				
2-2AF G-16			20.8	16.0	4.8																				
2-AF3A-S		3.0	17.3	12.5	4.8	5.6	3.4	1.0	1.82~2.89	2.63~6.6	12~10									YHT-2210	YA-1,YA-2 YAT-1A,YAT-2A YA-4 YAD-1A,YAD-2A YAT-4A YAD-4A	BCT-0514	1,000		
2-AFW		4.6	23.0	18.2	4.8																				
5.5-1AF		2.8	16.2	10.0	6.2																				
5.5-AF4A-S		4.0	20.8	14.0	6.8																				
5.5-2AF			25.4	18.6	6.8																				
5.5-AFW		4.5																							

注1) 100個入をご用意している製品もあります。詳細は弊社までお問い合わせください。 注2) 本製品の中には多少納期を要するものもあります。