

HMS100

SPECIFICATIONS

A277-01-01A

MODEL			HMS100	HMS100	HMS100	HMS100	HMS100	
ITEMS			-5	-12	-15	-24	-48	
1	Nominal Output Voltage		V	5	12	15	24	48
2	Maximum Output Current		A	20	8.5	7	4.5	2.1
3	Maximum Output Power		W	100.0	102.0	105.0	108.0	100.8
4	Efficiency (Typ.) (*1)	100VAC	%	84	86	86	87	88
		200VAC	%	86	88	88	89	90
5	Input Voltage Range (*2)		-	85 - 265VAC (47 - 63Hz) or 80 - 370VDC 75-85VAC : Operation time within 20 seconds.				
6	Input Current (Typ.) (*1)		A	1.3/0.65				
7	Inrush Current (Typ.) (*1)(*3)		-	14A at 100VAC, 28A at 200VAC, Ta=25°C, Cold Start				
8	PFHC		-	Designed to meet IEC61000-3-2				
9	Power Factor (Typ.) (*1)		-	0.98/0.93				
10	Output Voltage Range		V	4.0 - 6.4	9.0 - 14.4	12.0 - 18.0	19.2 - 28.8	38.4 - 52.8
11	Maximum Ripple & Noise (*4)	0≤Ta≤70°C	mV	120	150	150	150	200
		-10≤Ta<0°C	mV	160	180	180	180	240
12	Maximum Line Regulation (*5)		mV	20	48	60	96	192
13	Maximum Load Regulation (*6)		mV	40	96	120	150	240
14	Temperature Coefficient		-	Less than 0.02% / °C				
15	Over Current Protection (*7)		A	21.0 ≤	8.92 ≤	7.35 ≤	4.72 ≤	2.20 ≤
16	Over Voltage Protection (*8)		V	6.67 - 7.73	15.0 - 17.4	18.8 - 21.8	30.0 - 34.8	55.2 - 64.8
17	Hold-up Time (Typ.) (*1)		-	20ms				
18	Leakage Current (*9)		-	Less than 0.5mA. 0.2mA (Typ) at 100VAC / 0.4mA (Typ) at 230VAC				
19	Remote Sensing		-	Possible				
20	Remote ON/OFF Control		-	-				
21	Parallel Operation		-	-				
22	Series Operation		-	Possible				
23	Operating Temperature (*10)		-	-10 to +70°C (-10 to +50°C:100%, +60°C:60%, +70°C:20%)				
24	Operating Humidity		-	30 to 90%RH (No Condensing)				
25	Storage Temperature		-	-30 to +85°C				
26	Storage Humidity		-	10 to 95%RH (No Condensing)				
27	Cooling		-	Convection Cooling				
28	Withstand Voltage		-	Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (20mA) for 1min				
29	Isolation Resistance		-	More than 100MΩ at 25°C and 70%RH Output - FG : 500VDC				
30	Vibration		-	At no operating, 10 - 55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each.				
31	Shock		-	Less than 196.1m/s ²				
32	Line DIP		-	Designed to meet SEMI-F47 (200VAC Line only)				
33	Conducted Emission (*11)		-	Designed to meet EN55011/EN55022-B, FCC-B, VCCI-B				
34	Radiated Emission (*11)		-	Designed to meet EN55011/EN55022-B, FCC-B, VCCI-B				
35	Immunity (*11)		-	Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11				
36	Weight (Typ)		-	470g				
37	Size (W x H x D)		mm	33.5 x 83 x 160.5 (Refer to Outline Drawing)				

*Read instruction manual carefully, before using the power supply unit.

=NOTES=

*1. At 100VAC/200VAC, Ta=25°C, nominal output voltage and maximum output power.

*2. Output derating needed when input voltage less than 110VDC and 90VAC.

Refer to OUTPUT DERATING CURVE.(A277-01-02_, A277-01-03_)

*3. Not applicable for the inrush current to Noise Filter for less than 0.2ms.

*4. Measure with JEITA RC-9131B probe, Bandwidth of scope :100MHz.

*5. 85 - 265VAC, constant load.

*6. No load-Full load, constant input voltage.

*7. 5V : Constant current limit and Hiccup with automatic recovery.

12V - 48V : Constant current limit with automatic recovery.

Avoid to operate at over load or short circuit condition.

*8. OVP circuit will shut down output, manual reset (Re power on).

*9. Measured by the each measuring method of IEC60950-1 (at 60Hz), Ta=25°C.

*10. Output Derating

- Derating at standard mounting. Refer to OUTPUT DERATING CURVE.(A277-01-02_, A277-01-03_)

- Load (%) is percent of maximum output power or maximum output current, do not exceed its derating of maximum load.

*11. The power supply is considered a component which will be installed into a final equipment.

The final equipment should be re-evaluated that it meets EMC directives.

OUTPUT DERATING (AC INPUT)

A277-01-02

•Derating to input voltage : $85\text{VAC} \leq \text{Vin} \leq 265\text{VAC}$

Ta(°C)	LOAD(%)			
	MOUNTING A	MOUNTING B	MOUNTING C	MOUNTING D
-10 to +30	100	100	100	100
35	100	100	92	100
50	100	65	65	65
60	60	37	37	42
70	20	10	10	20



•Derating to input voltage : $75\text{VAC} \leq \text{Vin} < 85\text{VAC}$ *1

Ta(°C)	LOAD (%)		
	MOUNTING A	MOUNTING B,C	MOUNTING D
-10 to +50	60	60	60
60	60	37	42
70	20	10	20

*1. Operation time within 20 seconds.

•Derating to input voltage : $85\text{VAC} \leq \text{Vin} \leq 265\text{VAC}$

*Refer to dotted line for output derating curve, when input voltage range is " $85 \leq \text{Vin} < 90$ " for the MOUNTING A.

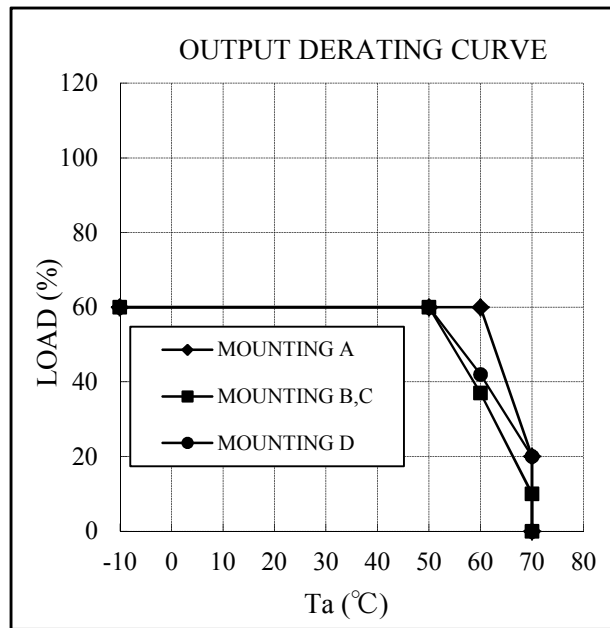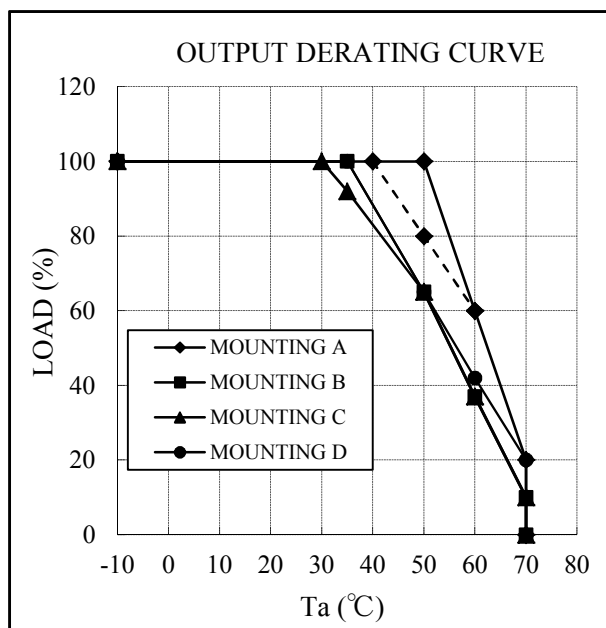

MOUNTING A


(STANDARD MOUNTING)

MOUNTING B

MOUNTING C

MOUNTING D

DON'T USE

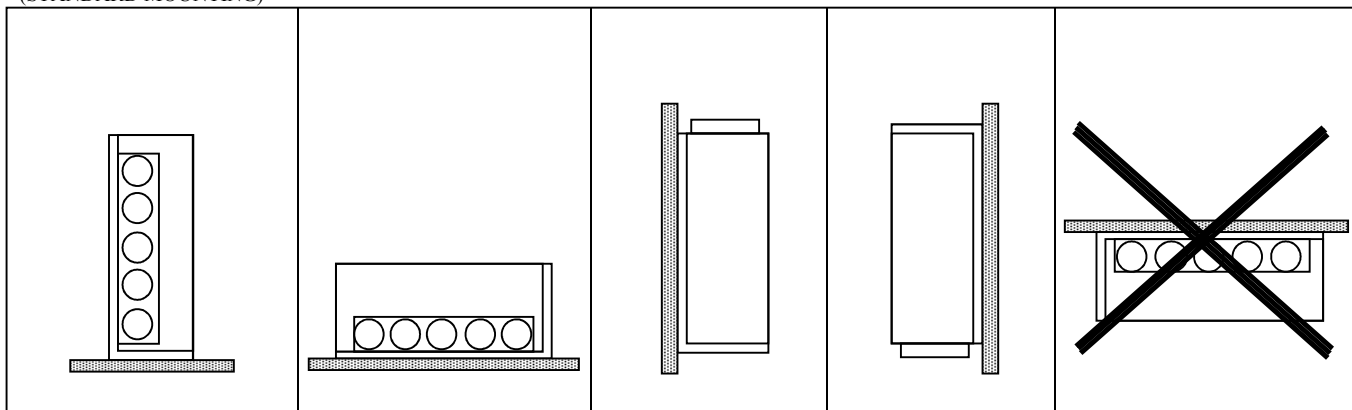

OUTPUT DERATING (DC INPUT)

A277-01-03


•Derating to input voltage : $110\text{VDC} \leq V_{in} \leq 370\text{VDC}$

Ta(°C)	LOAD(%)			
	MOUNTING A	MOUNTING B	MOUNTING C	MOUNTING D
-10 to +30	100	100	100	100
35	100	100	92	100
50	100	65	65	65
60	60	37	37	42
70	20	10	10	20


•Derating to input voltage : $80\text{VDC} \leq V_{in} < 110\text{VDC}$

Ta(°C)	LOAD(%)			
	MOUNTING A	MOUNTING B	MOUNTING C	MOUNTING D
-10 to +30	80	80	80	80
35	80	80	74	80
50	80	52	52	52
60	48	30	30	34
70	16	8	8	16

•Derating to input voltage : $110\text{VDC} \leq V_{in} \leq 370\text{VDC}$

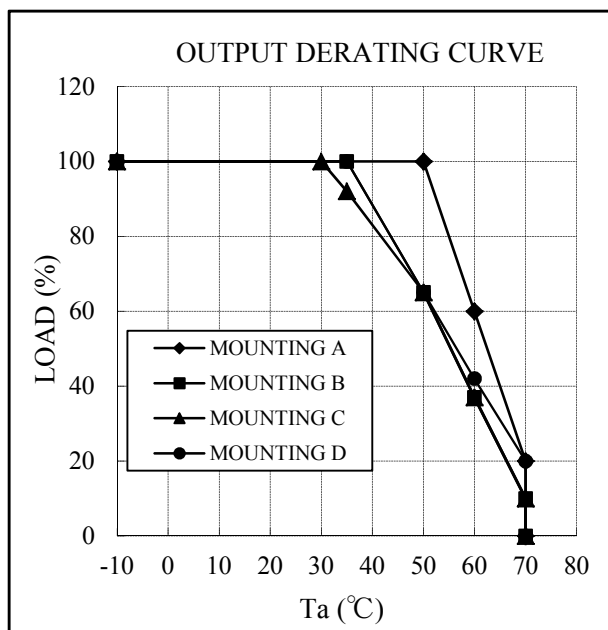

•Derating to input voltage : $80\text{VDC} \leq V_{in} < 110\text{VDC}$

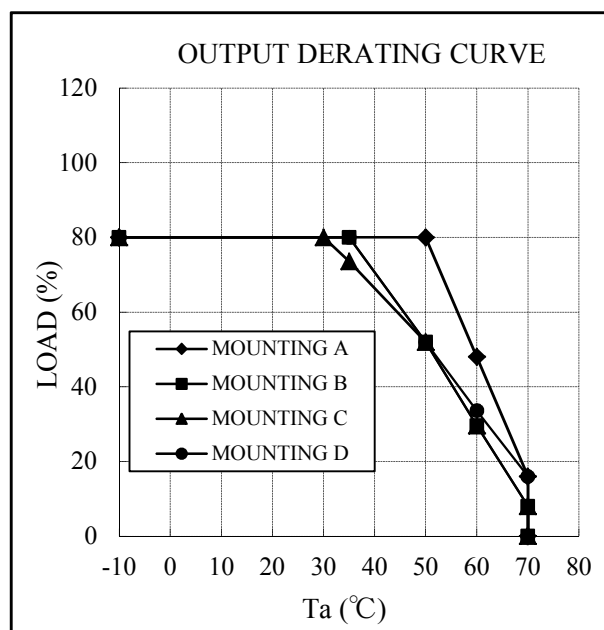

MOUNTING A

(STANDARD MOUNTING)

MOUNTING B

MOUNTING C

MOUNTING D

DON'T USE

