ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	TLY-1P	NEMA 1-15P, polarized	1	black overmold
2	TLY-53	C7, polarized	1	black overmold
3	30-00246	Wire, 2C, 18 AWG, UL SPT-2, 300V, 105C, 7.05 mm, VW-1, PVC	1	
4	Label	Adhesive flag, 15x100 mm	1	white with black font

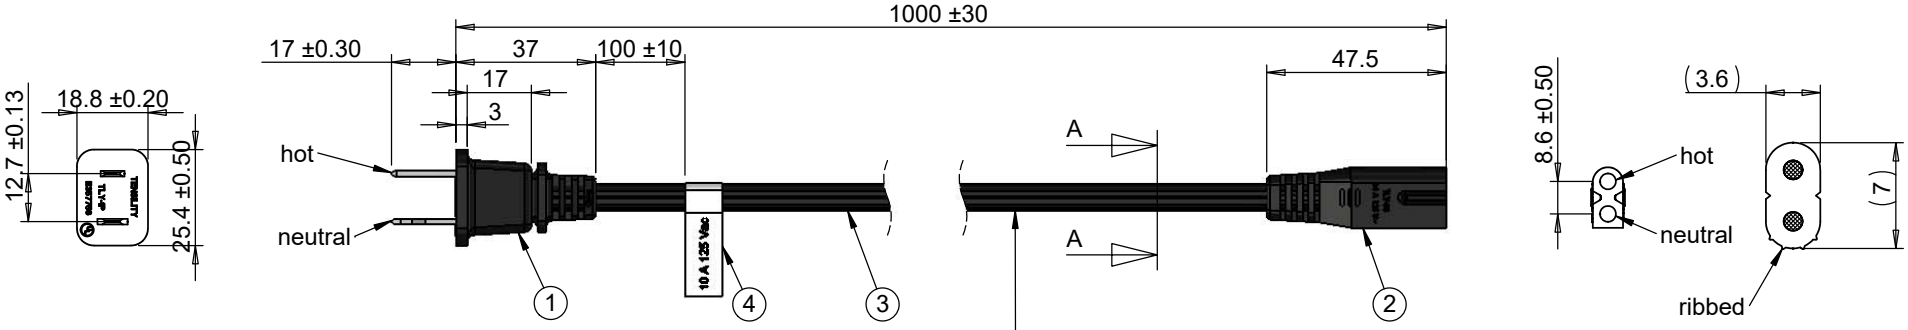

Wire marking: (UL) E339575 SPT-2 2x0.824 mm2
(18AWG) 105 C 300 V VW-1 C(UL) SPT-2 2x0.824 mm2
(18AWG) 105 C 300 V VW-1 TENSILITY HLE

Wiring Diagram		
1-15P	wire color	C7
hot	smooth	hot
neutral	ribbed	neutral

Notes:
Electrical requirements: 10 A at 125 Vac

Revision:	Date:	Description:
A	2/5/2013	Initial release

Prepared: DN — Digitally signed by DN Date: 2017.01.26 10:52:32 -08'00'

Verified: PS — Digitally signed by PS Date: 2017.01.26 14:49:54 -08'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:
RoHS and REACH compliant

Function test: no open, no short circuit, no intermittent

Description:
Ac cord, 1000 mm, U.S, NEMA 1-15P plug, TLY-1P to C7, TLY-53, 18 AWG, SPT-2 wire, 30-00246

TENSILITY
tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com

Size: A
Part number: 11-00019
Scale: 1:1
Sheet 1 of 1

5 4 3 2 1