


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	TLY-1P	NEMA 1-15P, polarized	1	white overmold
2	TLY-22S	C7	1	white overmold
3	30-00247	Wire, 2C, 18 AWG, UL SPT-2, 300V, 105C, 7.05 mm, VW-1, PVC, white	1	
4	Label	Adhesive flag, 15x100 mm	1	white and black font

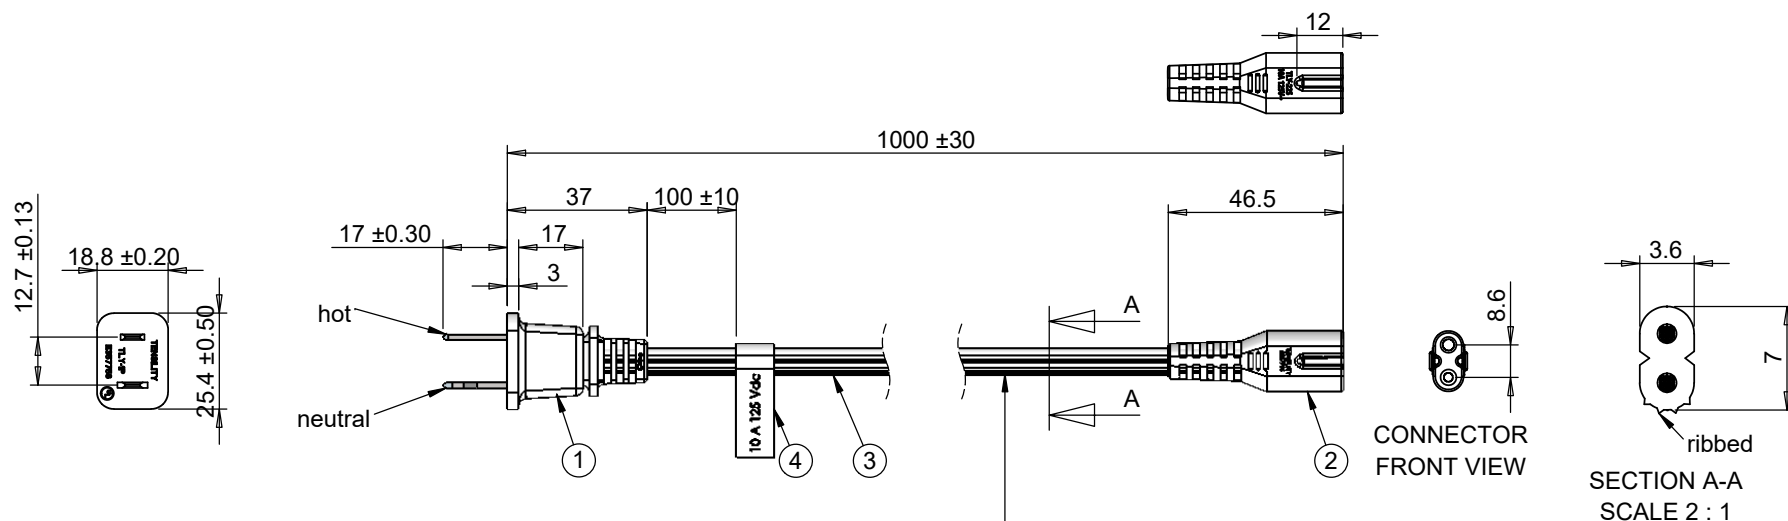

Wire marking: (UL) E339575 SPT-2 2X0.824mm²
 (18AWG) 105C 300V VW-1 C(UL) SPT-2 2X0.824mm²
 (18AWG) 105C 300V VW-1 TENSILITY HLE

Notes:
 Electrical requirements: 10 A at 125 Vac

Wiring Diagram	
TLY-1P	wire color
hot	smooth
neutral	ribbed

Revision:	Date:	Description:	Prepared:	Notes: RoHS and REACH compliant	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	12/20/2012	Initial Release	Verified:		
			Dimensions are in millimeters.	Function test: no open, no short circuit, no intermittent	Size: Part number: A 11-00020
			Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm		
				Description: Ac cord, 1000 mm, U.S, NEMA 1-15P plug, TLY-1P to C7, TLY-22S, 18 AWG, SPT-2 wire, 30-00247, white	Scale: 1:2 Sheet 1 of 1